
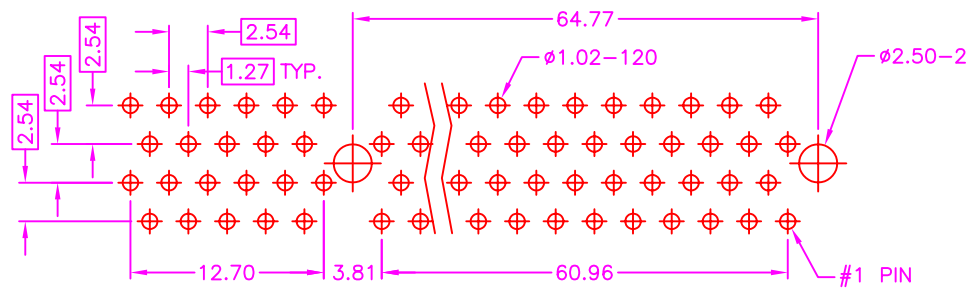
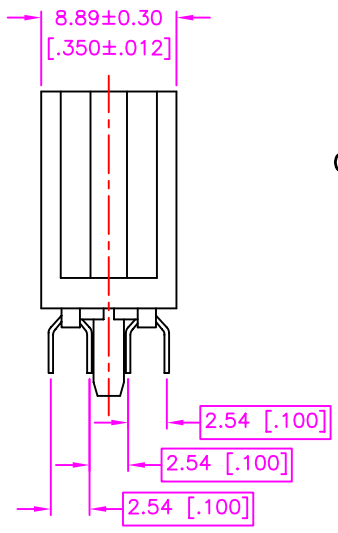
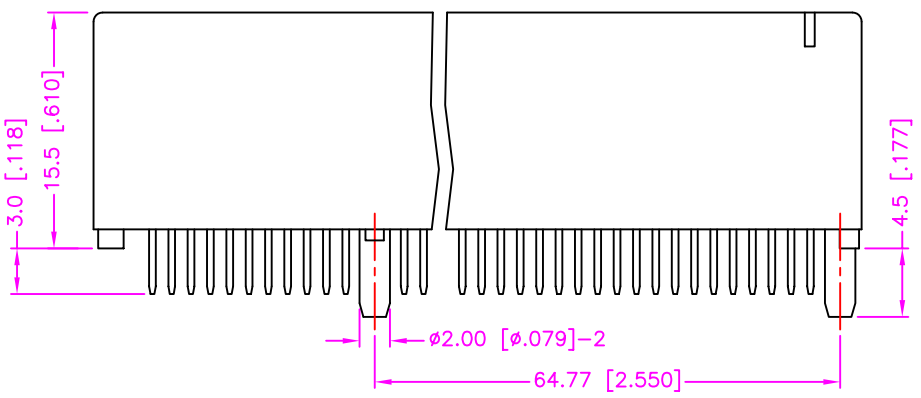


REV.	DESCRIPTION	DATE
A	RELEASE	Mar. 29, 2004
B		
C		

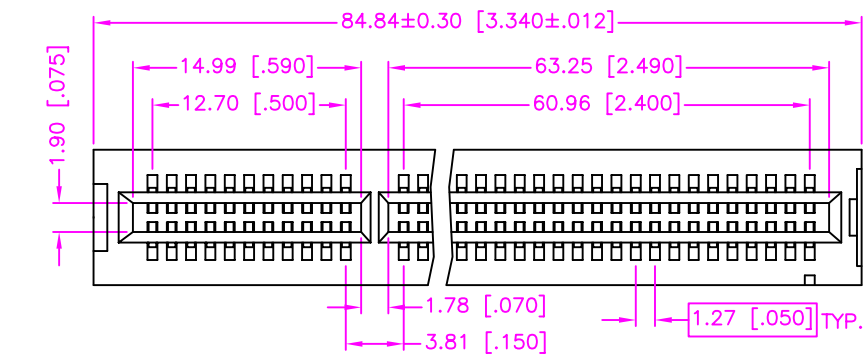

RECOMMEND P.C.B. LAYOUT  
TOP VIEW


**MATERIALS**

- HOUSING : POLYAMIDE (UL 94V-0).
- TERMINAL : COPPER ALLOY. (t=0.30mm)

**SPECIFICATION**

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -55°C TO +105°C.

**ORDER INFORMATION :**

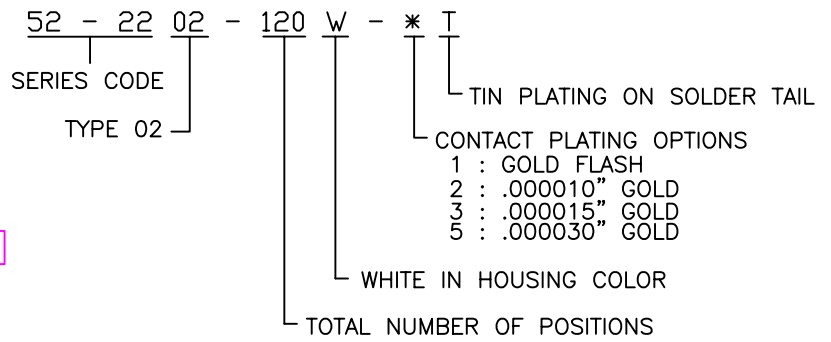

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3'		DRAWER <i>SUE</i>	 <b>WWW.ASTRON.COM.TW</b>
CHECK <i>Katherlin</i>		APP'D <i>LION</i>	
PRODUCT SPEC. —		NAME CARD EDGE CONNECTOR 1.27mm PITCH, P.C.B. MOUNT VERTICAL, 1 KEY (PCI)	
UNITS : mm [inch]		DRAW NO. C152-2209	
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A
		DRAW NO. 08001	