
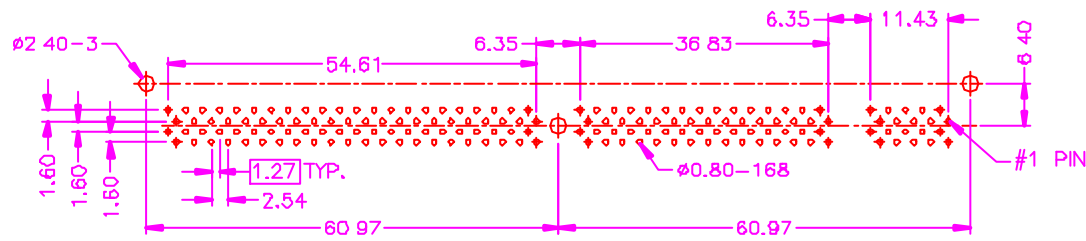
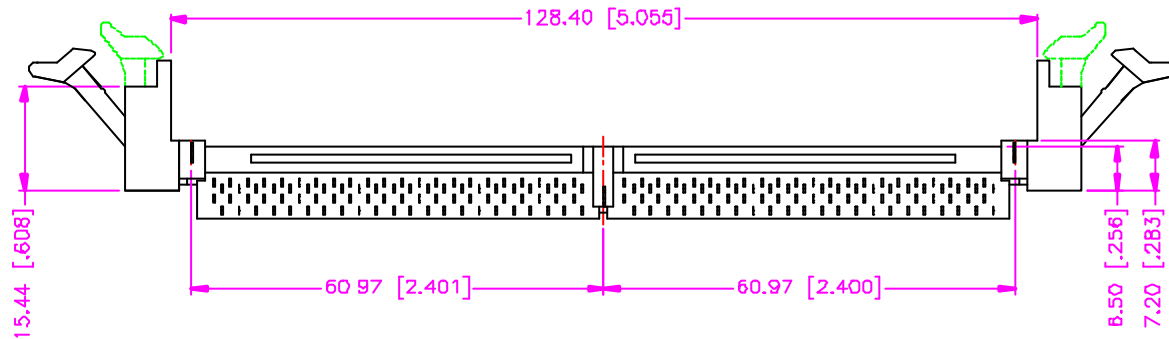
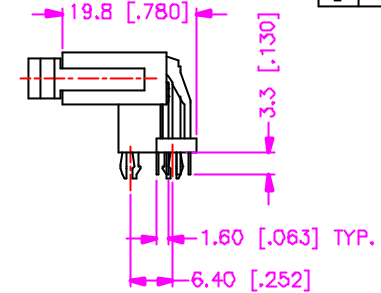


REV.	DESCRIPTION	DATE
—	RELEASE	Sep. 1, 2000
1	DRAW MODIFY	Mar 23, 2001
2	MATERIAL MODIFY	Jun. 1, 2001

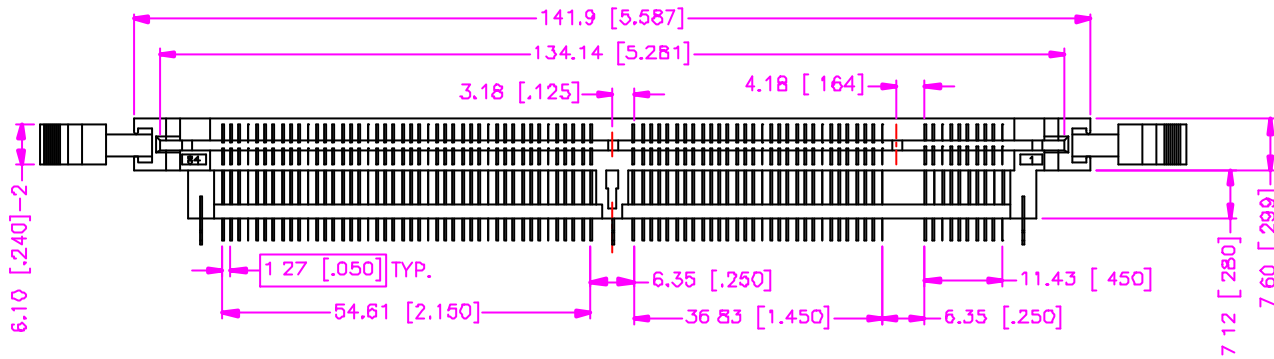

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

ORDER INFORMATION

38 - 02 02 - 168 - * T

SERIES CODE: 38 - 02 02
3.3V UDRAM, HIGH LATCH, ACD TYPE

NUMBER OF POSITIONS: 168

TIN PLATING ON SOLDER TAIL

CONTACT PLATING OPTIONS

- 1 : GOLD FLASH
- 2 : .000010" GOLD
- 3 : .000015" GOLD
- 5 : .000030" GOLD

MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. LATCH : POLYAMIDE (UL 94V-0), WHITE.
3. TERMINAL : PHOSPHOR BRONZE. (t=0.25mm)
4. BOARDLOCK : COPPER ALLOY, TIN PLATING. (t=0.40mm)

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.

TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=±.XXX .0000=±. ANG.=±3°		DRAWER <i>Kathleen</i>	Astron ASTRON TECHNOLOGY CORP.
UNITS : mm [inch]		CHECK <i>Sue</i>	
SCALE NONE		APP'D <i>Wesley</i>	NAME DIMM 168P SOCKET P.C.B MOUNT RIGHT ANGLE TYPE 3.3V UDRAM
SIZE A4		PRODUCT SPEC. —	DRAW NO. C238-0201
SHEET 1 OF 1		214-0013	17003
REV. C			