REV.	DESCRIPTION	DATE
—	RELEASE	Dec. 24, 2002
1	DRAW MODIFY	Jan. 21, 2003
2		

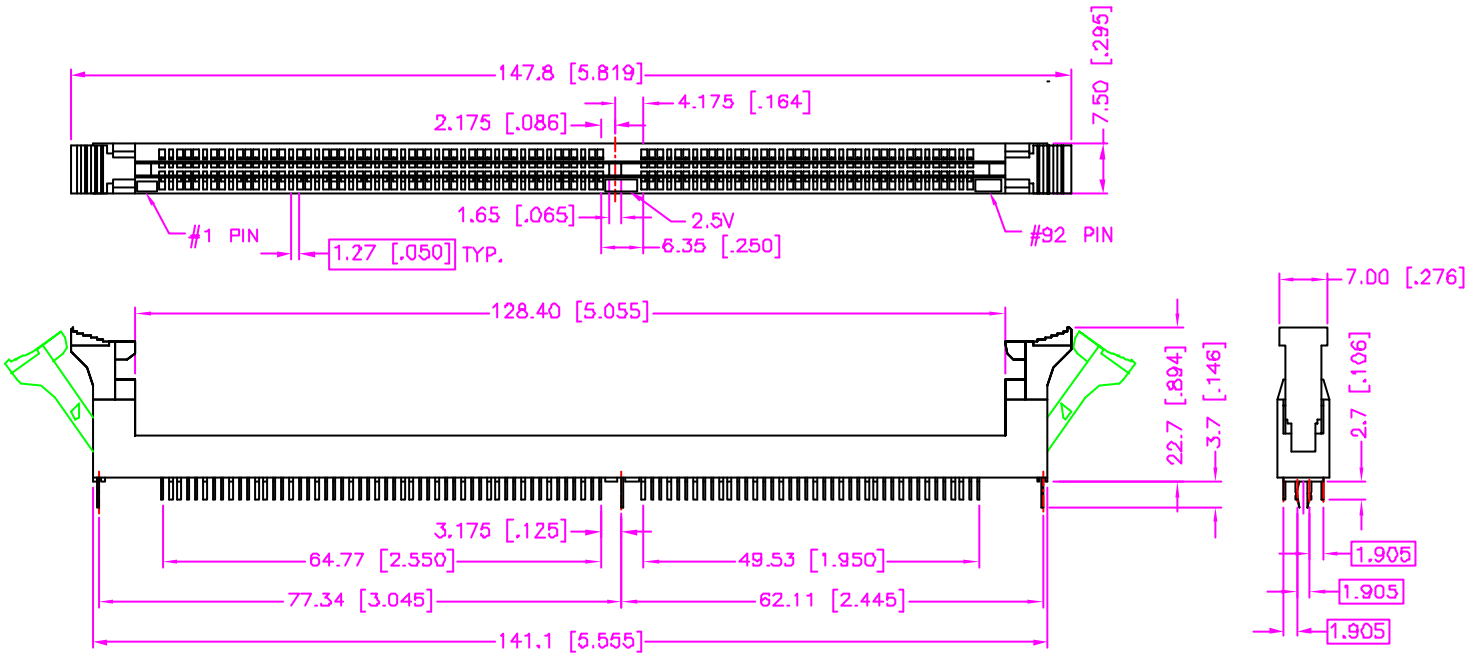

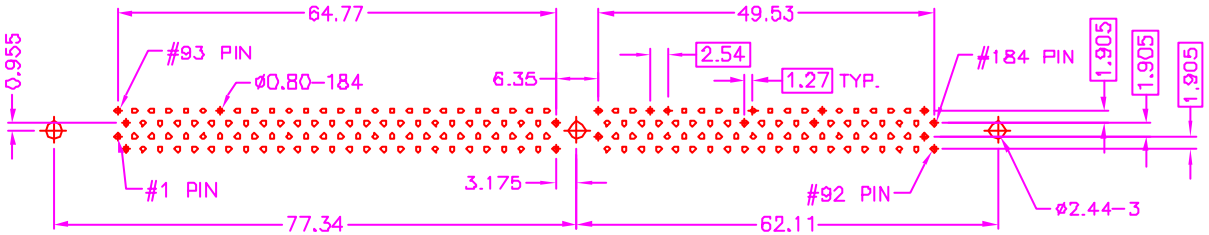

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

1. HOUSING : POLYAMIDE (UL 94V-0), BLACK.
2. LATCH : POLYAMIDE (UL 94V-0), WHITE.
3. TERMINAL : BRASS. (t=0.25mm)
4. BOARDLOCK : BRASS, NICKEL PLATING. (t=0.40mm)

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.

ORDER INFORMATION

38 - 06 02 1 - 184 - * T

- SERIES CODE
- TYPE 02
- 2.5V DDR DRAM, HIGH LATCH
- NUMBER OF POSITIONS
- CONTACT PLATING OPTIONS
  - 1 : GOLD FLASH
  - 2 : .000010" GOLD
  - 3 : .000015" GOLD
  - 5 : .000030" GOLD
- TIN PLATING ON SOLDER TAIL

TOLERANCE .0=±.30 [.012] .00=±.20[.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER MLE CHECK Katherine APP'D ALEX PRODUCT SPEC. —	Astron ASTRON TECHNOLOGY CORP.
UNITS : mm [inch]		NAME DDR DIMM SOCKET 1.27mm PITCH, P.C.B. MOUNT VERTICAL TPYE
		DRAW NO. C238-0601
SCALE NONE / SIZE A4	SHEET 1 OF 1 / REV. B	05008