

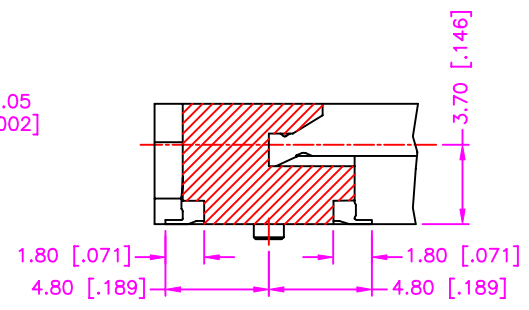
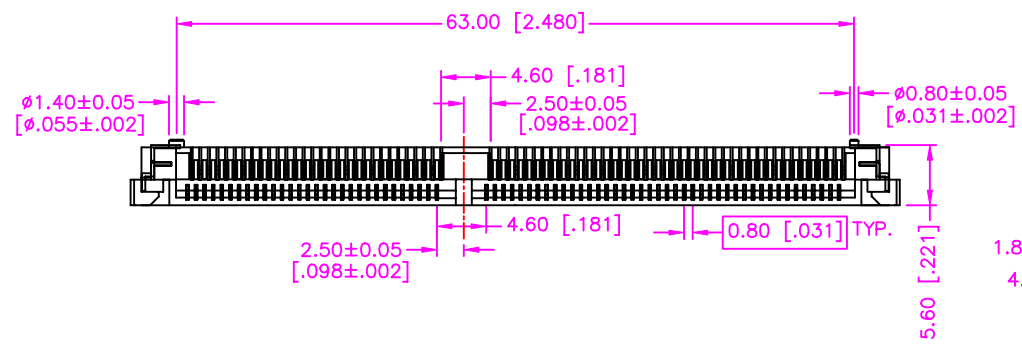


REV.	DESCRIPTION	DATE
—	RELEASE	Jun. 24, 2002
1		
2		



A - A SECTION

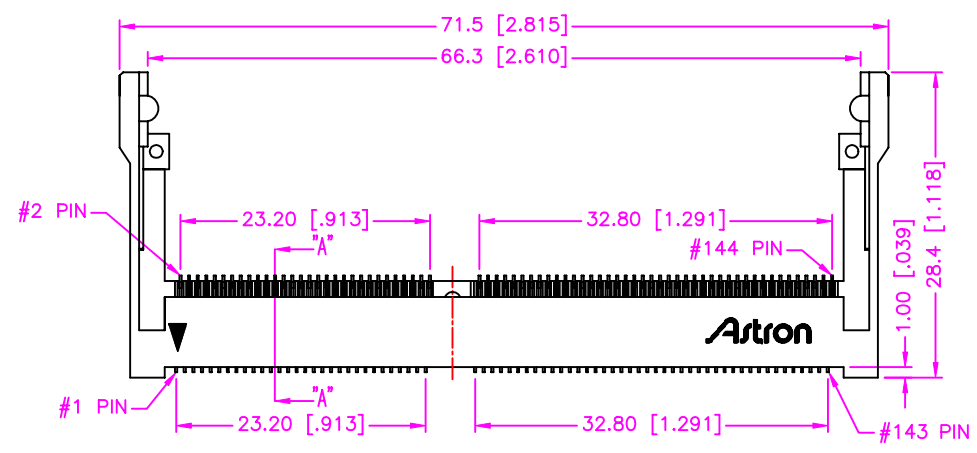



MATERIALS

- HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), WHITE.
- TERMINAL : COPPER ALLOY. (t=0.20mm)
- SOLDER TAB : COPPER ALLOY, TIN PLATING. (t=0.30mm)

SPECIFICATION

- CURRENT RATING : 0.5 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 250V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M OHMS MIN. AT 250V DC.
- CONTACT RESISTANCE : 50m OHMS MAX.
- OPERATING TEMPERATURE : -55°C TO +105°C.
- DURABILITY : 25 CYCLES MIN.
- MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.
- VOLTAGE RATING : 100V R.M.S. MAX.

ORDER INFORMATION :

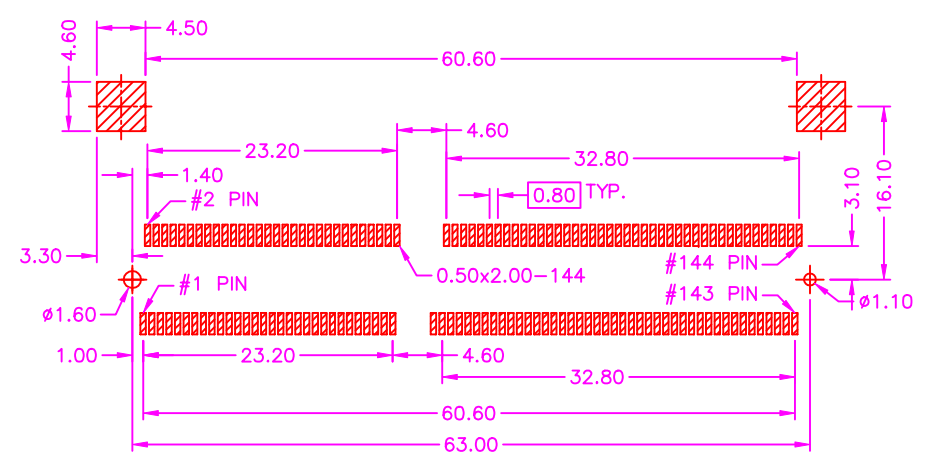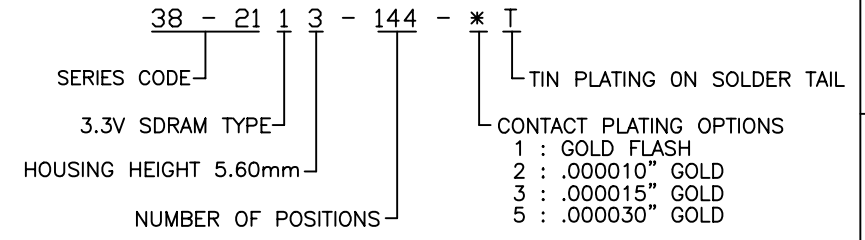

**RECOMMEND P.C.B. LAYOUT
TOP VIEW**

TOLERANCE .0±.0.30 [0.012] .00±.0.20 [0.008] .000±.0.000 .0000±. ANG.=±3°	DRAWER <i>Katherlin</i> CHECK <i>PLB</i> APP'D <i>WJY&LY</i>	<p>ASTRON TECHNOLOGY CORP.</p>		
<p>UNITS : mm [inch]</p>	<p>PRODUCT SPEC. —</p>		<p>NAME MEMORY SOCKET SERIES SO DIMM SOCKET 0.80mm PITCH, P.C.B. MOUNT (H=5.60mm) SMT TYPE (3.3V SDRAM TYPE)</p>	
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	DRAW NO. C238-2101
				08012