

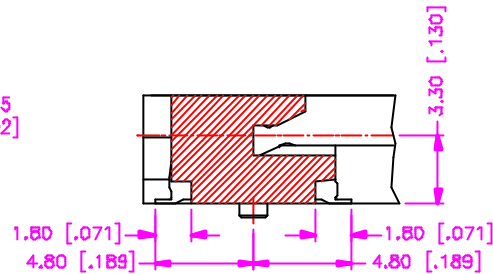


REV.	DESCRIPTION	DATE
—	RELEASE	JUL. 17, 2002
1		
2		

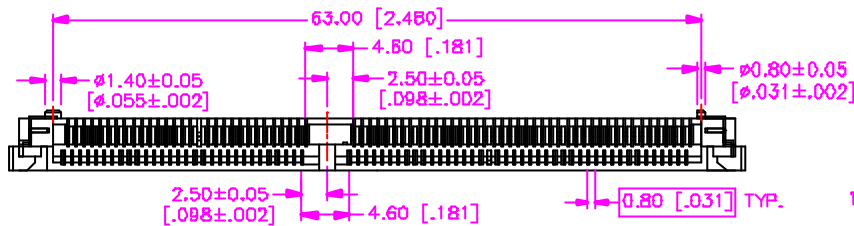

A - A SECTION

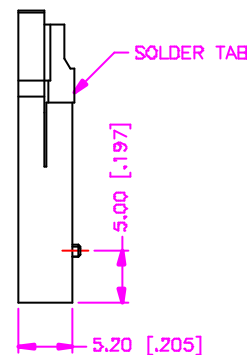

MATERIALS

- HOUSING : HI-TEMP. PLASTIC (UL 94V-0), WHITE.
- TERMINAL : COPPER ALLOY. (t=0.20mm)
- SOLDER TAB : COPPER ALLOY, TIN PLATING. (t=0.30mm)

SPECIFICATION



- CURRENT RATING : 0.5 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 250V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M OHMS MIN. AT 250V DC.
- CONTACT RESISTANCE : 50m OHMS MAX.
- OPERATING TEMPERATURE : -55°C TO +105°C.
- DURABILITY : 25 CYCLES MIN.
- MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.
- VOLTAGE RATING : 100V R.M.S. MAX.

ORDER INFORMATION :

38 - 21 1 2 - 144 - * T

SERIES CODE | 3.3V SDRAM TYPE | NUMBER OF POSITIONS | TIN PLATING ON SOLDER TAIL | CONTACT PLATING OPTIONS

CONTACT PLATING OPTIONS:
 1 : GOLD FLASH
 2 : .000010" GOLD
 3 : .000015" GOLD
 5 : .000030" GOLD

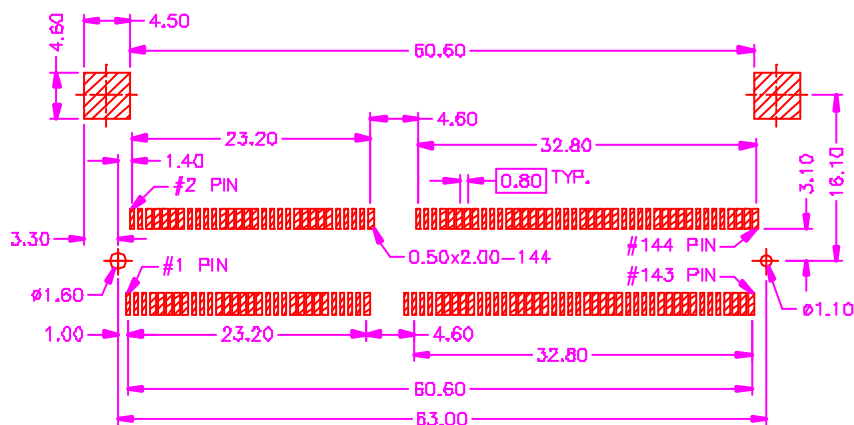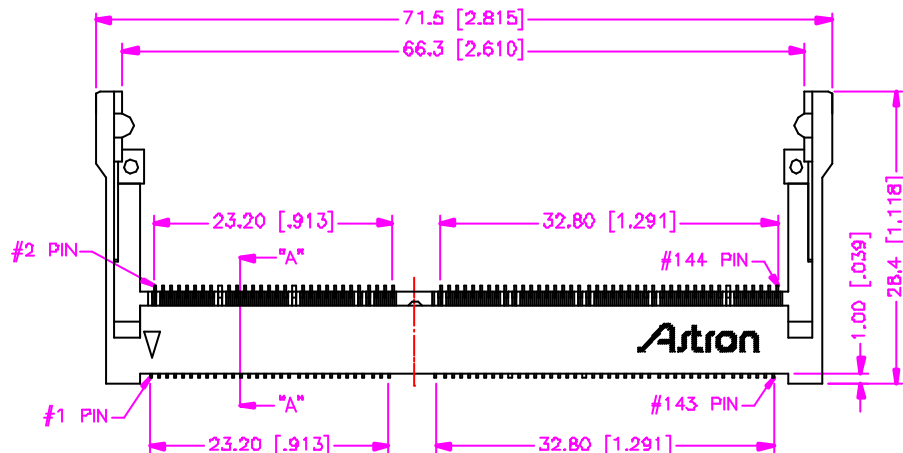

**RECOMMEND P.C.B. LAYOUT
TOP VIEW**

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>SUB</i> CHECK <i>Katherlin</i> APP'D <i>WJYBY</i>	 ASTRON TECHNOLOGY CORP. MEMORY SOCKET SERIES SO DIMM SOCKET
UNITS : mm [inch]	PRODUCT SPEC. — 223-0004	
SCALE NONE	SIZE A4	DRAW NO. C238-2105
SHEET 1 OF 1	REV. A	OB012