
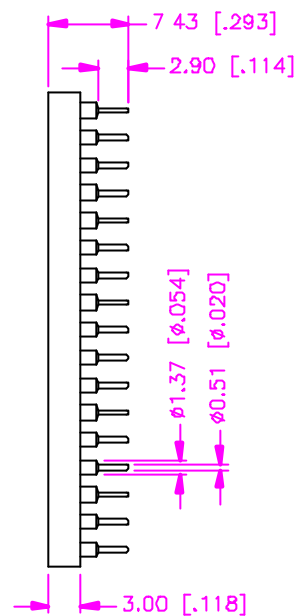


REV.	DESCRIPTION	DATE
—	RELEASE	Apr. 17, 2002
1		
2		

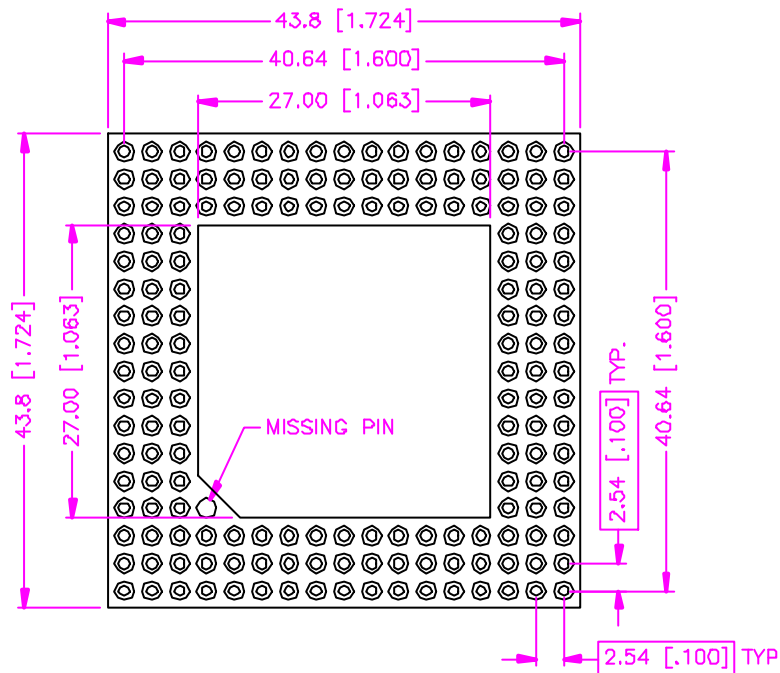

MATERIALS

1. HOUSING : POLYAMIDE (UL 94V-0), BLACK.
2. INNER CONTACT (6 FINGER CLIP) : BERYLLIUM COPPER, GOLD PLATING.
3. OUTER SLEEVE : BRASS, TIN PLATING.

SPECIFICATION

1. CURRENT RATING : 2 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.


ORDER INFORMATION PART NUMBER

39 - 01 17 00 - 168

SERIES CODE

TOTAL NUMBER OF POSITIONS

GRID SIZE : 17x17

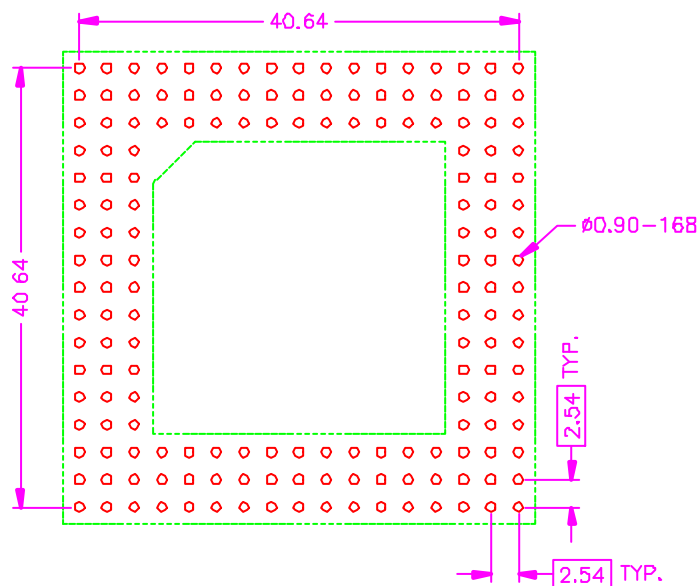

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

TOLERANCE .0=±.38 [.015] OD=±.25 [.010] ODO=± ODOO=± ANG.=±3°	DRAWER <i>Kathelin</i>	 ASTRON TECHNOLOGY CORP.
	CHECK <i>JUE</i>	
 UNITS : mm [inch]	APP'D <i>WSELY</i>	DRAW NO. C239-0101
	PRODUCT SPEC. —	REV. A
SCALE NONE	SIZE A4	SHEET 1 OF 1
		REV. A
		12014