
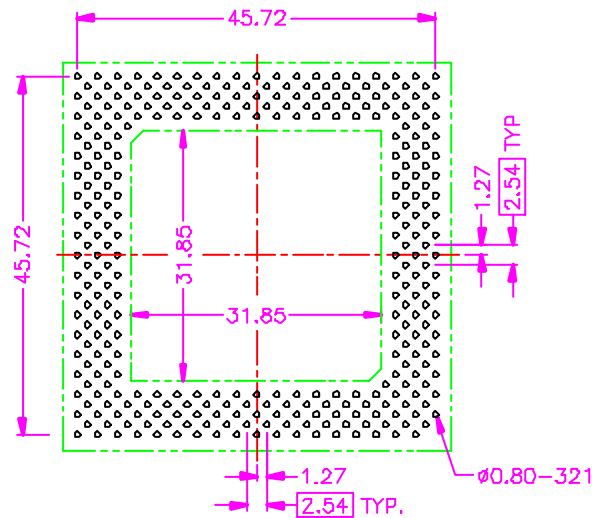
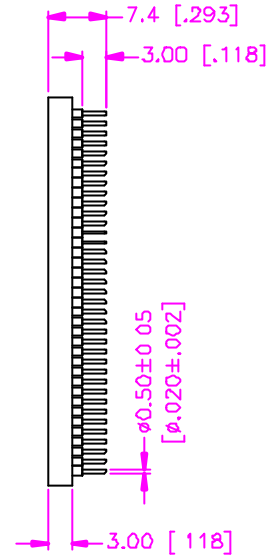


REV.	DESCRIPTION	DATE
—	RELEASE	May. 28. 2001
1		
2		

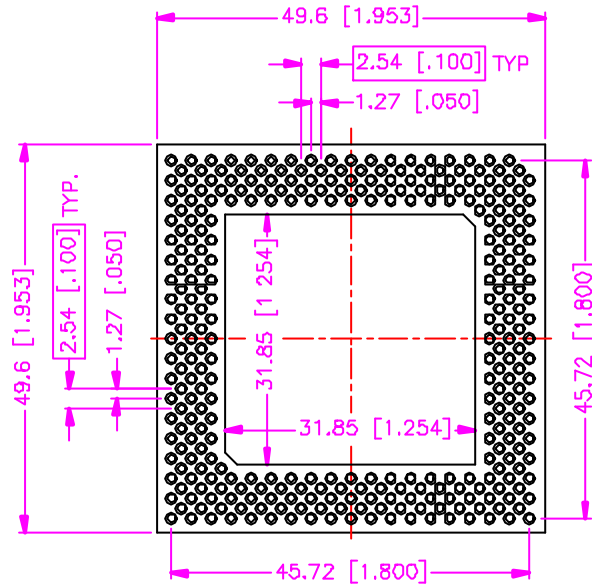

RECOMMEND P.C.B. LAYOUT  
BOTTOM VIEW

### MATERIALS

1. HOUSING . POLYESTER (UL 94V-0), BLACK.
2. INNER CONTACT (6 FINGER CLIP) ;  
BERYLLIUM COPPER, GOLD PLATING.
3. OUTER SLEEVE : BRASS, TIN PLATING.

### SPECIFICATION

1. CURRENT RATING : 2 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :  
500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN.  
AT 50V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.

### ORDER INFORMATION PART NUMBER

39 - 02 19 00 - 321

SERIES CODE — TOTAL NUMBER OF POSITIONS  
GRID SIZE : 19x19

TOLERANCE		DRAWER	<b>Astron</b>
.0=±.3B [.015]		<i>Katherlin</i>	
.00=±.25 [.010]		CHECK	ASTRON TECHNOLOGY CORP.
.000=±.		APP'D	NAME
ANG.=±3°		<i>ALEX</i>	NON-ZIF PGA SOCKET 321 INTERSTITIAL TYPE
UNITS : mm [inch]		PRODUCT SPEC.	DRAW NO.
SCALE NONE		204-0005	C239-0202
SIZE A4	SHEET 1 OF 1	REV. A	12014