
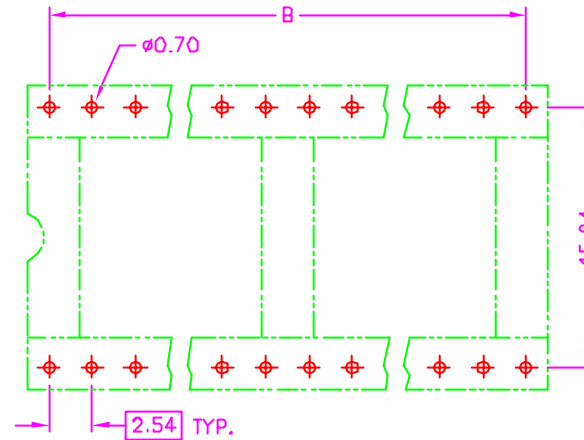


REV.	DESCRIPTION	DATE
—	RELEASE	Oct. 5, 2000
1	P/N MODIFY	Nov. 02, 2002
2		

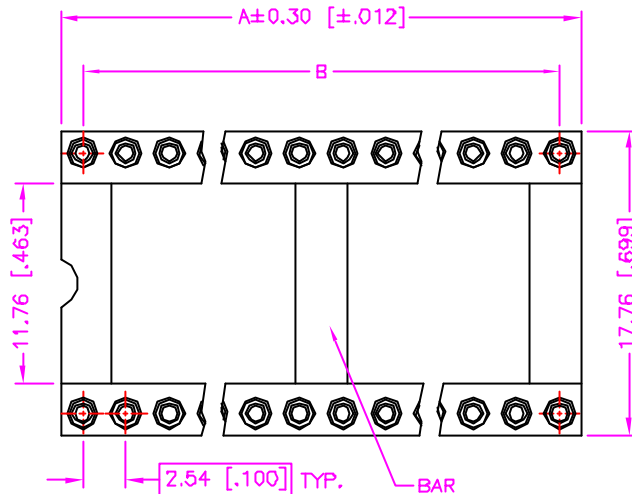



RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

1. HOUSING : POLYESTER (UL 94V-0), BLACK.
2. CONTACT : BERYLLIUM COPPER, GOLD PLATING.
3. SLEEVE : BRASS, TIN PLATING.

SPECIFICATION

1. CURRENT RATING : SIGNAL APPLICATION ONLY.
2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 100V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO $+105^{\circ}\text{C}$.

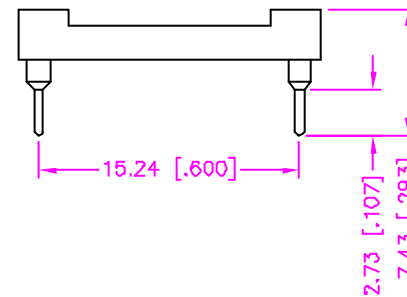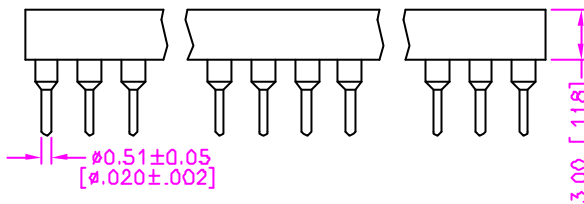

ORDER INFORMATION :

40 - 02 01 6 * - **

SERIES CODE | TYPE 01 | BAR OPTIONS
A : WITHOUT BAR
BLANK : WITH BAR | TOTAL NUMBER OF POSITIONS
ROWS SPACING 15.24mm (0.6")

NUMBER OF POSITIONS	DIMENSION		BAR OPTIONS	
	A	B	WITH BAR	W/O BAR
24	30.46[1.199]	27.94[1.100]	○	○
28	35.54[1.399]	33.02[1.300]	○	○
32	40.62[1.599]	38.10[1.500]	○	○
36	45.70[1.799]	43.18[1.700]	○	
40	50.78[1.999]	48.26[1.900]	○	○
42	53.32[2.099]	50.80[2.000]	○	
48	60.94[2.399]	58.42[2.300]	○	
50	63.48[2.499]	60.96[2.400]	○	
52	66.02[2.599]	63.50[2.500]	○	

TOLERANCE .0 = ± 0.30 [$.012$] .00 = ± 0.20 [$.008$] .000 = $\pm .XXX$.0000 = \pm ANG. = $\pm 3^{\circ}$	DRAWER <i>JUB</i> CHECK <i>Katherlin</i> APP'D <i>ALB</i>	 ASTRON TECHNOLOGY CORP. NAME DIP SOCKET 2.54mm PITCH, DUAL IN-LINE, P.C.B. MOUNT, VERTICAL MACHINE PIN (0.6")		
UNITS : mm [inch]	PRODUCT SPEC. — 202-0005		DRAW NO. C240-0206	
SCALE NONE	SIZE A4	SHEET 1 DF 1	REV. B	12014