
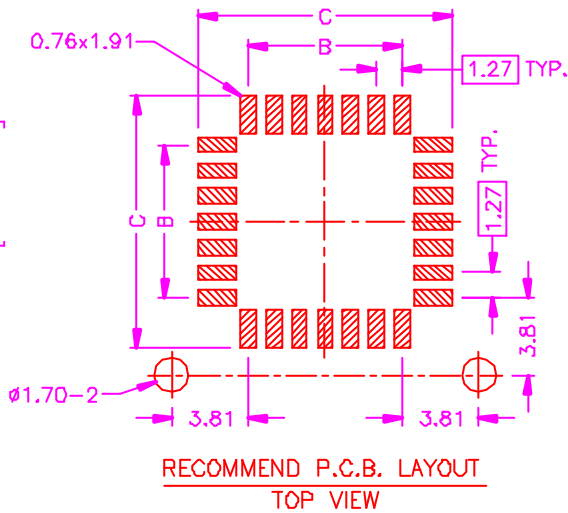
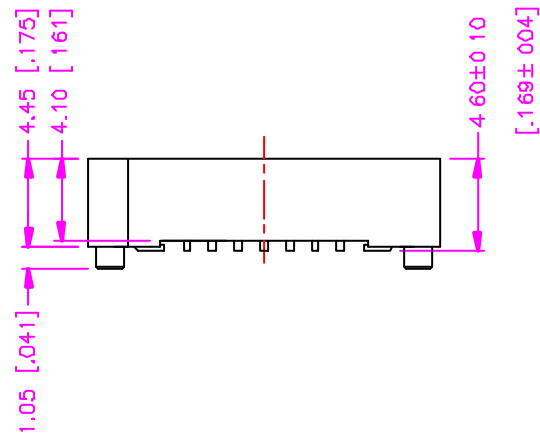
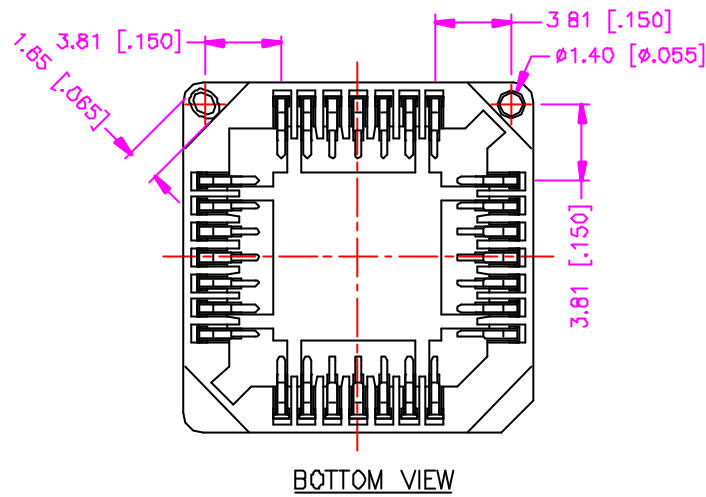


REV.	DESCRIPTION	DATE
—	RELEASE	Sep. 4, 2001
1		
2		

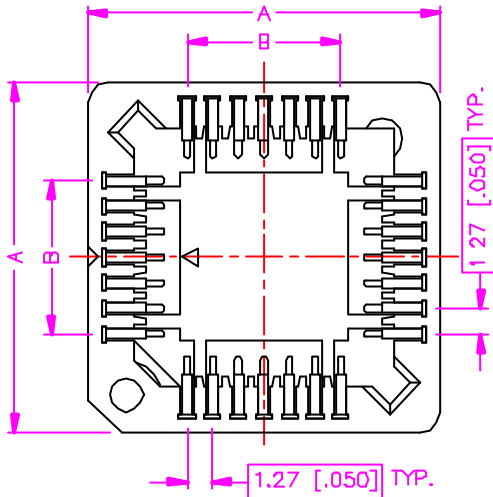


MATERIALS

- HOUSING : HI.-TEMP PLASTIC (UL 94V-0).
- TERMINAL : PHOSPHOR BRONZE, TIN PLATING.
(t=0.17mm)

SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
600V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M OHMS MIN.
AT 500V DC
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -55°C TO +105°C.
- CAPACITANCE : 1PF.
- MAX. PROCESSING TEMP :
230°C FOR 30 ~ 60 SECONDS.

ORDER INFORMATION

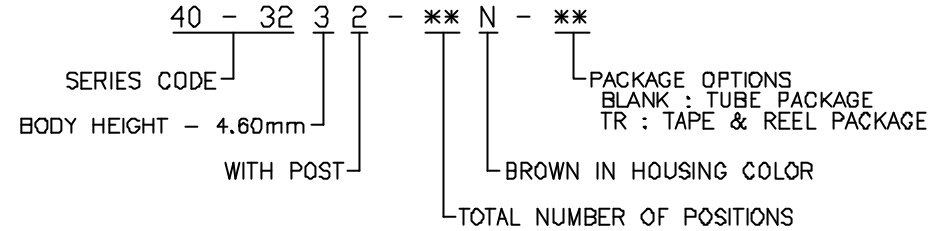

TOTAL NO. OF POS.	DIMENSIONS		
	A	B	C
20	14.86[.585]	5.08[.200]	10.03[.040]
28	17.40[.685]	7.62[.300]	12.57[.495]
44	22.48[.885]	12.70[.500]	17.65[.695]
52	25.40[1.000]	15.24[.600]	20.19[.795]
68	30.54[1.202]	20.32[.800]	25.27[.995]
84	35.56[1.400]	25.40[1.000]	30.35[1.165]

TOLERANCE	
.0=±.30 [.012]	
.00=±.20 [.008]	
.000=±.XXX	
.0000=±.	
ANG.=±3°	
UNITS : mm [inch]	
SCALE	SIZE
NONE	A4

DRAWER	<i>Katherine</i>
CHECK	<i>RUB</i>
APP'D	<i>ALEX</i>
PRODUCT SPEC.	—
206-0013	
SHEET	REV.
1 OF 1	A

Astron	
ASTRON TECHNOLOGY CORP.	
NAME	PLCC SOCKET
	1.27mm PITCH, P.C.B. MOUNT
	SMT TYPE
DRAW NO.	C240-3202
09008	