REV.	DESCRIPTION	DATE
A	RELEASE	Oct. 11, 2002
B	DRAW MODIFY	Nov. 15, 2002
C	DRAW MODIFY	Feb. 10, 2004

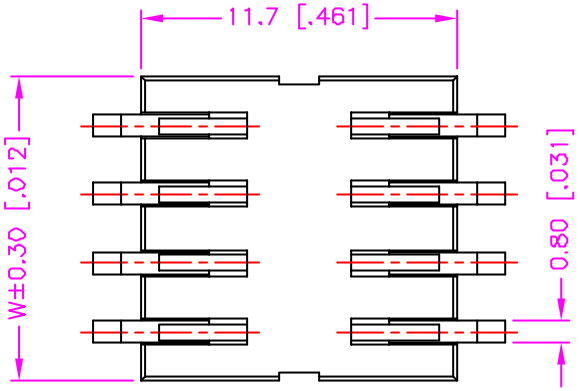

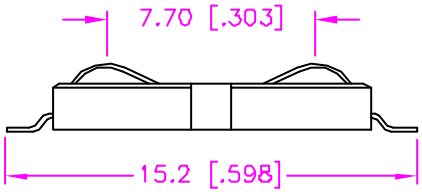

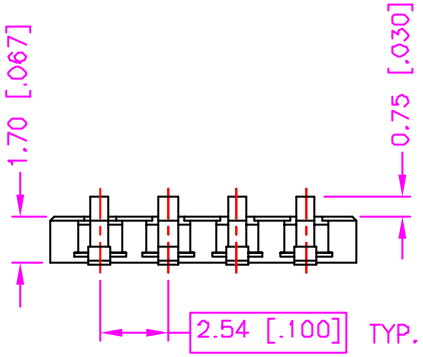

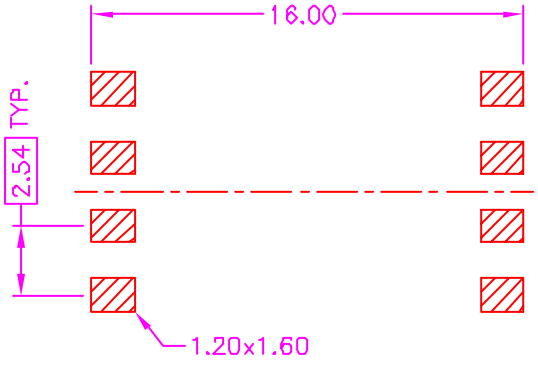

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
2. TERMINAL : COPPER ALLOY, GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.

SPECIFICATION

1. CURRENT RATING : 0.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 100m OHMS MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.
7. DURABILITY : 5000 CYCLES.

ORDER INFORMATION :

54 - 01 05 - *

- 54 : SERIES CODE
- 01 05 : TYPE 05
- * : NUMBER OF POSITIONS (SEE TABLE)

NUMBER OF POSITIONS	W LENGTH
6	8.70 [.343]
8	11.24 [.443]

TOLERANCE
.0=±.30 [.012]
.00=±.20 [.008]
.000=±.XXX
.0000=±.
ANG.=±3°

UNITS : mm [inch]

SCALE NONE | SIZE A4 | SHEET 1 OF 1 | REV. C

DRAWER SUE
CHECK Katherlin
APP'D LION
PRODUCT SPEC. —

Astron
WWW.ASTRON.COM.TW

NAME MEMORY CARD
SIM CARD READER CONNECTOR
2.54mm PITCH, SMT TYPE

DRAW NO. C254-0105

10022