


| REV. | DESCRIPTION | DATE |
|------|-------------|---------------|
| — | RELEASE | Oct. 29, 2001 |
| 1 | DRAW MODIFY | Feb. 13, 2003 |
| 2 | P/N MODIFY | Jul. 21, 2003 |

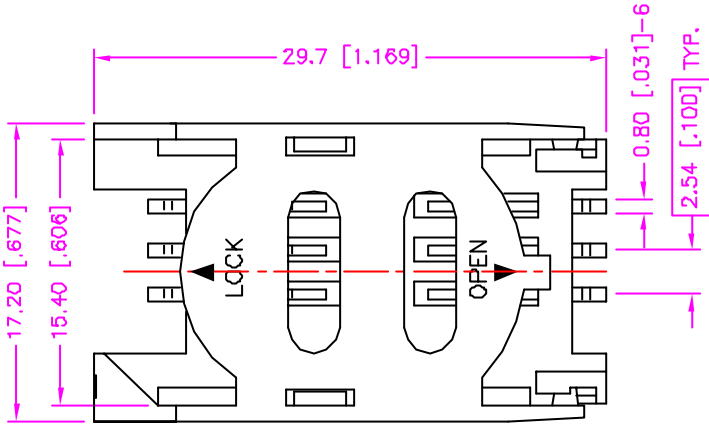

MATERIALS





1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE, GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.

SPECIFICATION

1. CURRENT RATING : 0.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX. (INITIAL)
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.
7. DURABILITY : 5000 CYCLES.

ORDER INFORMATION :

54 - 02 02 1 - 6 - **

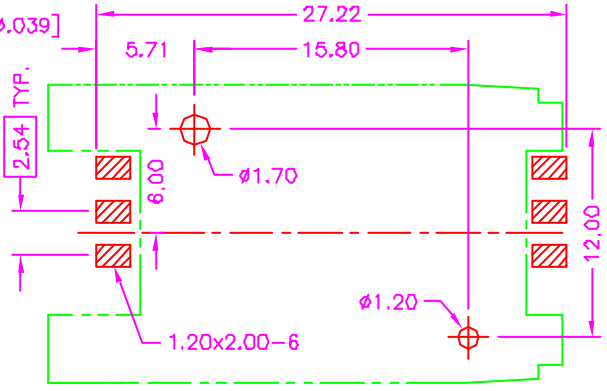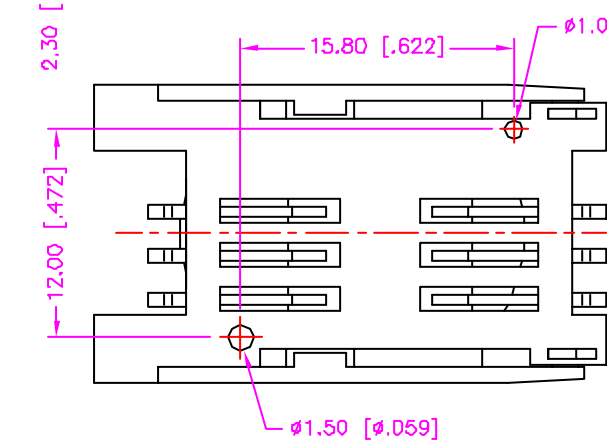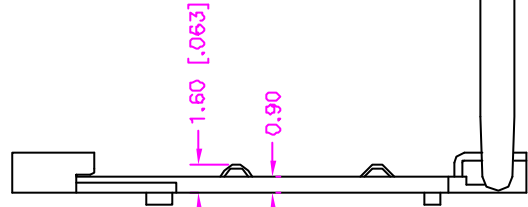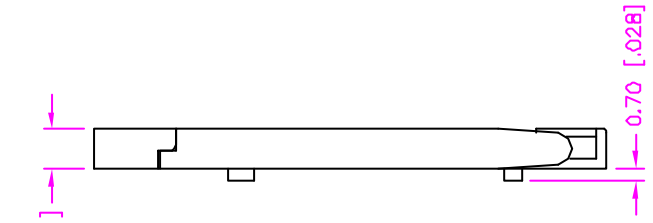

| | |
|-----------------|------------------------|
| TOLERANCE | DRAWER |
| .0=±.30 [.012] | <i>NUS</i> |
| .00=±.20 [.008] | CHECK <i>Katherine</i> |
| .000=±.XXX | APP'D <i>LEON</i> |
| .0000=±. | PRODUCT SPEC. — |
| ANG.=±3° | |

| | | | | |
|-------------------|------------|---------|--------------|--------|
| UNITS : mm [inch] | SCALE NONE | SIZE A4 | SHEET 1 OF 1 | REV. C |
|-------------------|------------|---------|--------------|--------|

| | |
|-------------------------|---|
| Astron | |
| ASTRON TECHNOLOGY CORP. | |
| NAME | MEMORY CARD |
| PRODUCT SPEC. | SIM CARD READER CONNECTOR, 2.54mm PITCH, SMT TYPE |
| DRAW NO. | C254-0205 |
| DRAW NO. | 08001 |