


REV.	DESCRIPTION	DATE
—	RELEASE	Oct. 29, 2001
1	DRAW MODIFY	Feb. 13, 2003
2	P/N MODIFY	Jul. 21, 2003

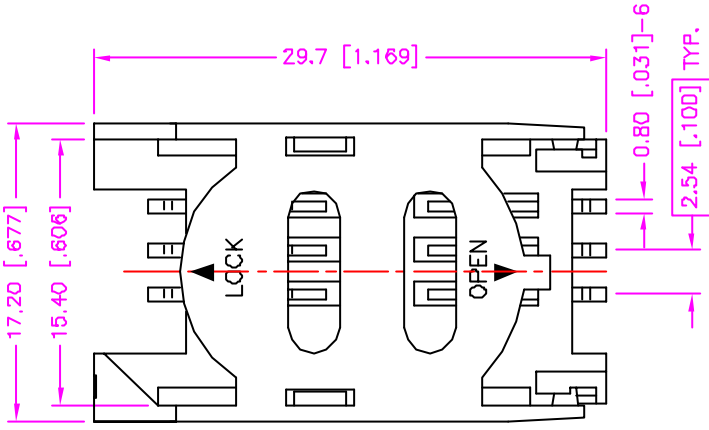

MATERIALS





- HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE, GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.

SPECIFICATION

- CURRENT RATING : 0.5 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 30m OHMS MAX. (INITIAL)
- OPERATING TEMPERATURE : -25°C TO +85°C.
- MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.
- DURABILITY : 5000 CYCLES.

ORDER INFORMATION :

54 - 02 02 1 - 6 - **

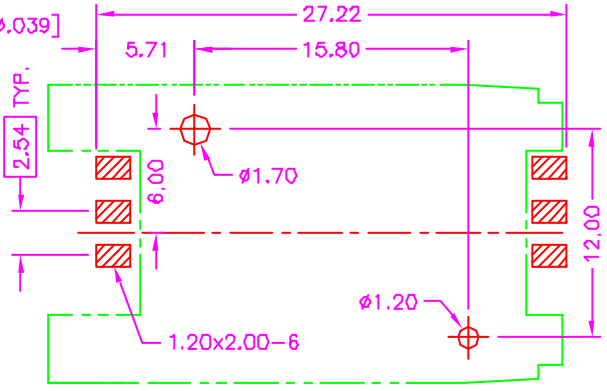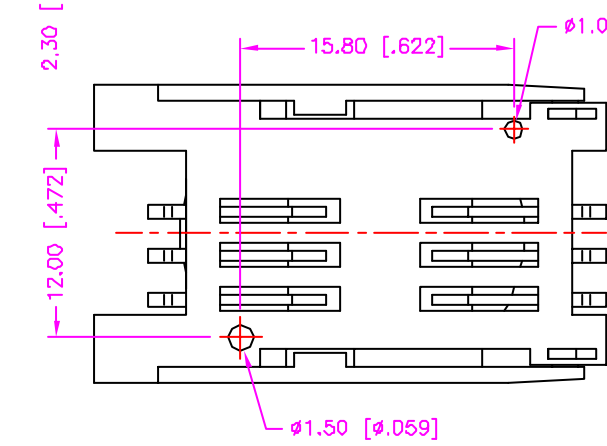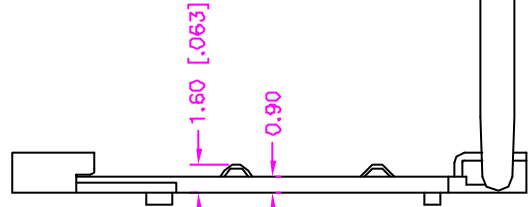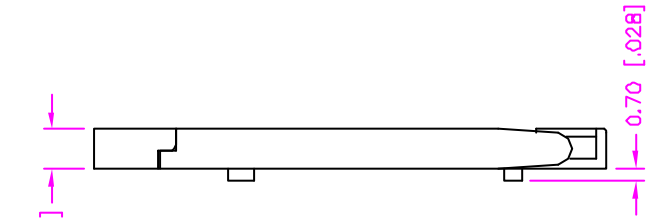

TOLERANCE	DRAWER
.0=±.30 [.012]	<i>NUS</i>
.00=±.20 [.008]	CHECK <i>Katherine</i>
.000=±.XXX	APP'D <i>LEON</i>
.0000=±.	PRODUCT SPEC. —
ANG.=±3°	

UNITS : mm [inch]	SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. C
-------------------	------------	---------	--------------	--------

Astron	
ASTRON TECHNOLOGY CORP.	
NAME	MEMORY CARD
PRODUCT SPEC.	SIM CARD READER CONNECTOR, 2.54mm PITCH, SMT TYPE
DRAW NO.	C254-0205
DRAW NO.	08001