


REV.	DESCRIPTION	DATE
—	RELEASE	Mar. 06, 2002
1	DRAW MODIFY	Jul. 11, 2003
2		

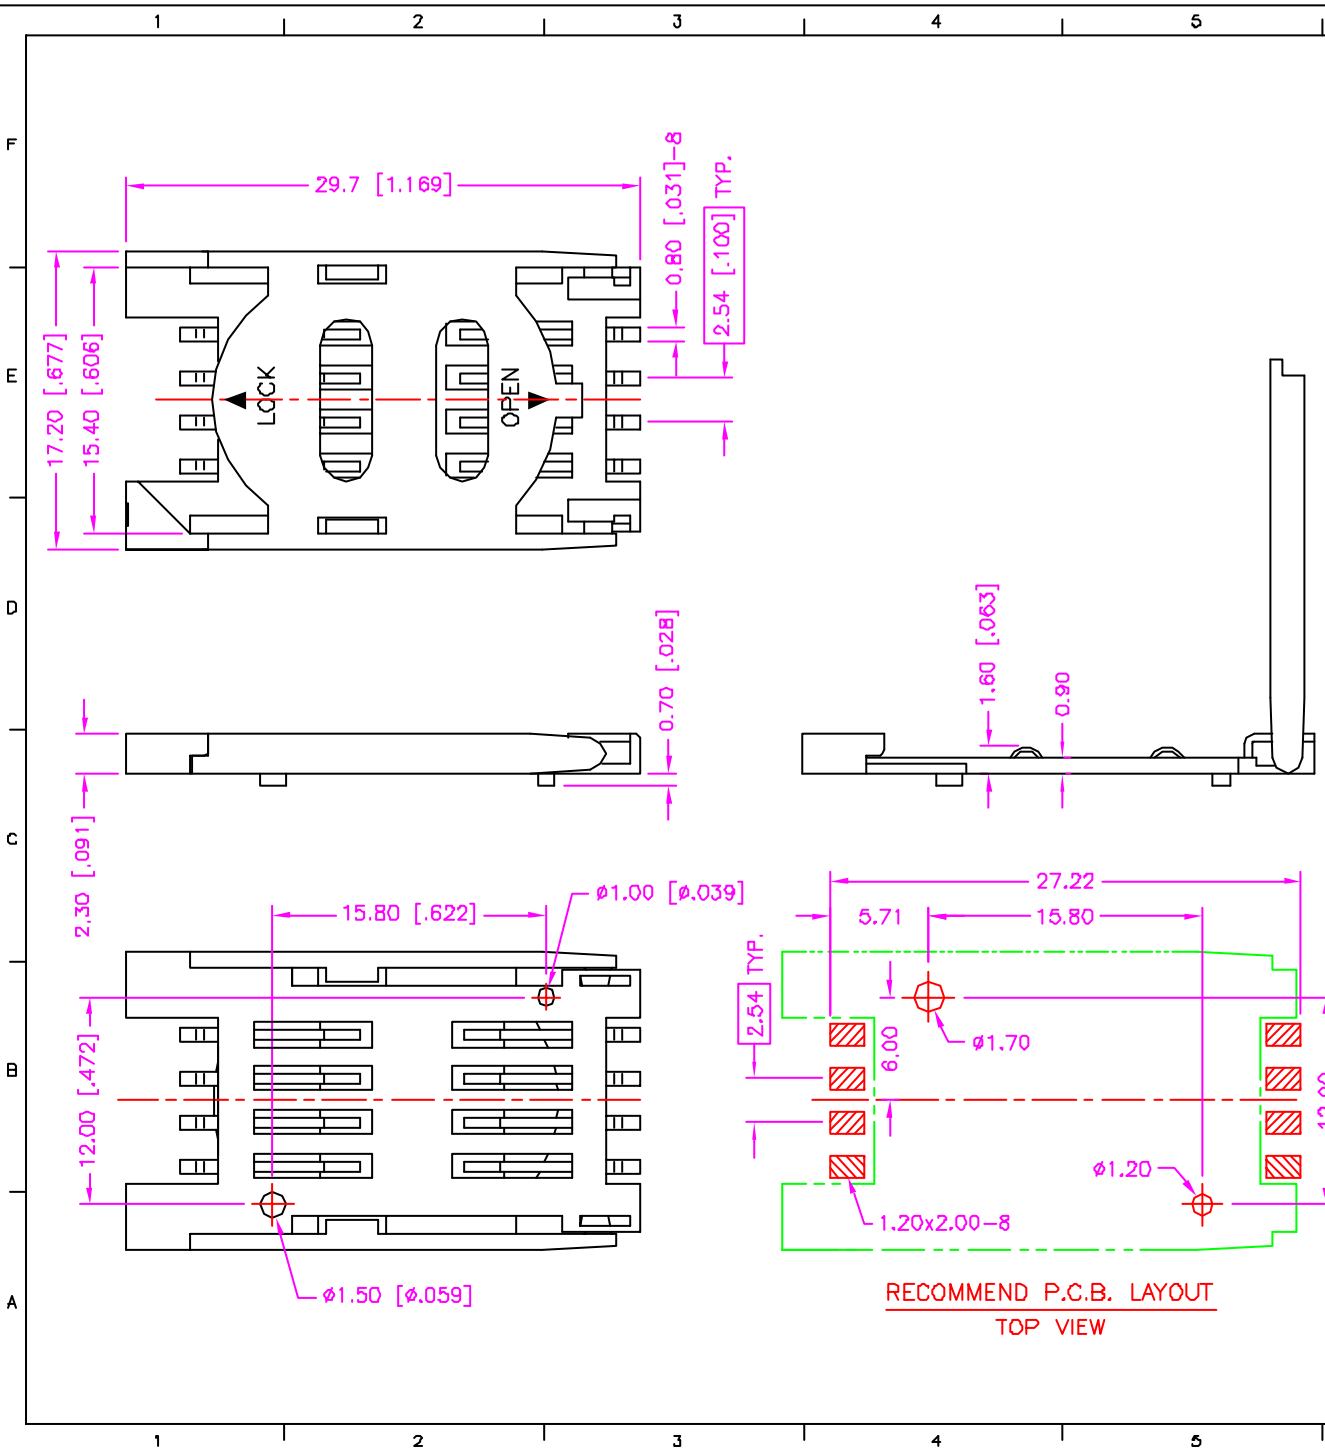

MATERIALS

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE, GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.

SPECIFICATION

1. CURRENT RATING : 0.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.
7. DURABILITY : 5000 CYCLES.

ORDER INFORMATION :

54 - 02 02 1 - 8

NUMBER OF POSITIONS

WITH POST

TYPE 02

SERIES CODE

TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>JUS</i>	 ASTRON TECHNOLOGY CORP.
	CHECK <i>Katherlin</i>	
	APP'D <i>ASB</i>	PRODUCT SPEC. SIM CARD READER CONNECTOR, 2.54mm PITCH, SMT TYPE
UNITS : mm [inch]	SHEET 1 OF 1	REV. B
SCALE NONE	SIZE A4	DRAW NO. C254-0206
	SHEET 1 OF 1	REV. B
	SCALE NONE	DRAW NO. C254-0206
	SIZE A4	REV. B
	SHEET 1 OF 1	DRAW NO. C254-0206
	SCALE NONE	DRAW NO. C254-0206

RECOMMEND P.C.B. LAYOUT
TOP VIEW