REV.	DESCRIPTION	DATE
—	RELEASE	Sep. 20, 2002
1	DRAW MODIFY	Jan. 17, 2003
2		

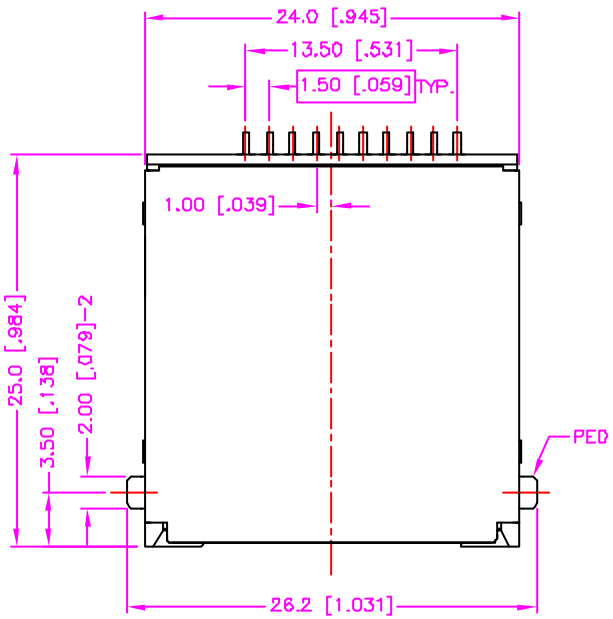

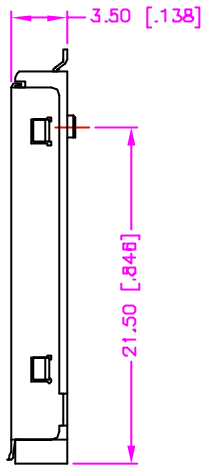

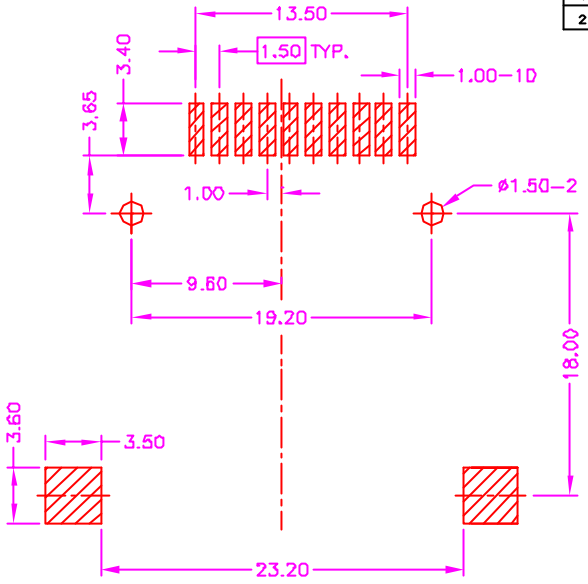

RECOMMEND P.C.B. LAYOUT
TOP VIEW

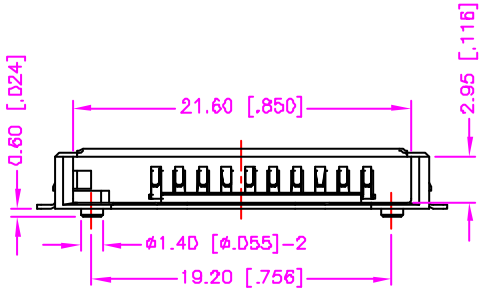

ORDER INFORMATION :

54 - 06 02 - 10 W

- 54 — SERIES CODE
- 06 02 — TYPE 02
- 10 — NUMBER OF POSITIONS
- W — WHITE IN HOUSING COLOR

MATERIALS

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0).
2. TERMINAL : PHOSPHOR BRONZE, GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL. (t=0.20mm)
3. SHIELD : STAINLESS STEEL, NICKEL PLATING, GOLD PLATING ON PED. (t=0.20mm)

SPECIFICATION

1. CURRENT RATING : 0.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 100m OHMS MAX.
5. OPERATING TEMPERATURE : -20°C TO +85°C
6. MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER Katherlin	Astron ASTRON TECHNOLOGY CORP.	
	CHECK LION		
	APP'D LUE	NAME MEMORY CARD MS READER CONNECTOR P.C.B. MOUNT, 1.50mm PITCH SMT TYPE (NORMAL TYPE)	
UNITS : mm [inch]	PRODUCT SPEC. —		
		DRAW NO. C254-0602	
SCALE NONE / SIZE A4	SHEET 1 OF 1 / REV. B	10019	