

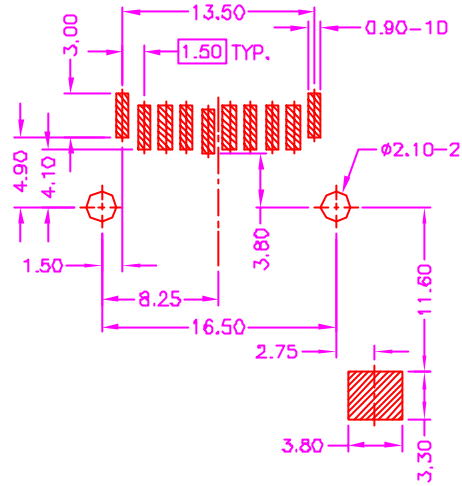
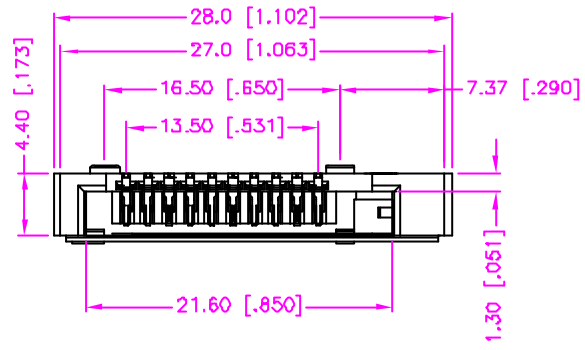


REV.	DESCRIPTION	DATE
—	RELEASE	Dec. 13, 2002
1	DRAW MODIFY	Feb. 27, 2003
2	DRAW MODIFY	Mar. 26, 2003

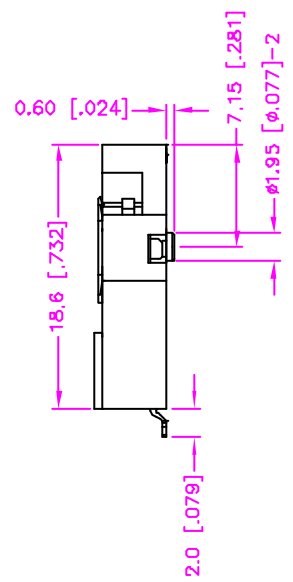

RECOMMEND P.C.B. LAYOUT
TOP VIEW

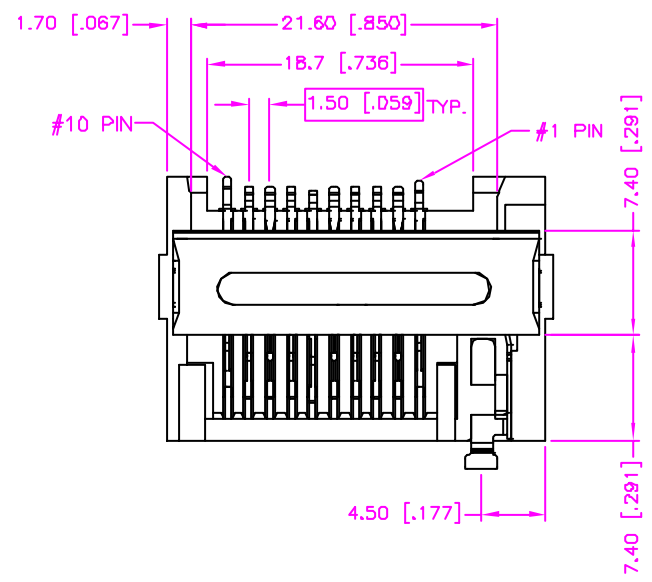

MATERIALS

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE, 15 μ " GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.
3. SHIELD : COPPER ALLOY, NICKEL PLATING.

SPECIFICATION

1. CURRENT RATING : 0.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 500M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 100m OHMS MAX.
5. OPERATING TEMPERATURE : -20°C TO +60°C
6. MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.

ORDER INFORMATION :

54 - 06 03 - 10
 SERIES CODE | TYPE 03 | NUMBER OF POSITIONS

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>LSPON</i>	 ASTRON TECHNOLOGY CORP.
	CHECK <i>ULS</i>	
 UNITS : mm [inch]	APP'D <i>Katherlin</i>	DRAW NO. C254-0603
	PRODUCT SPEC. —	SHEET 1 OF 1
SCALE NONE	SIZE A4	REV. C
		10019