
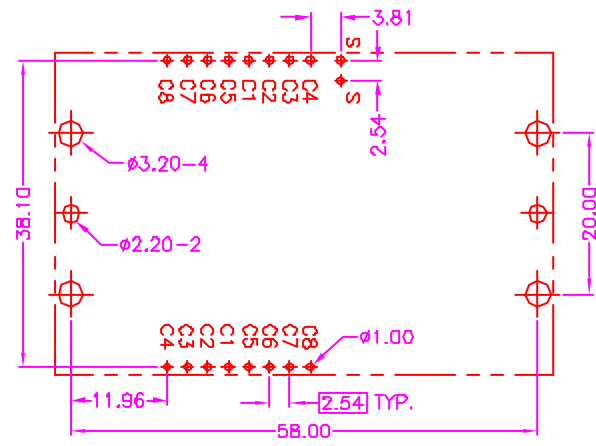


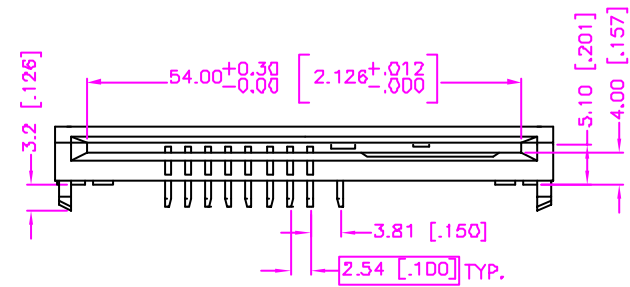
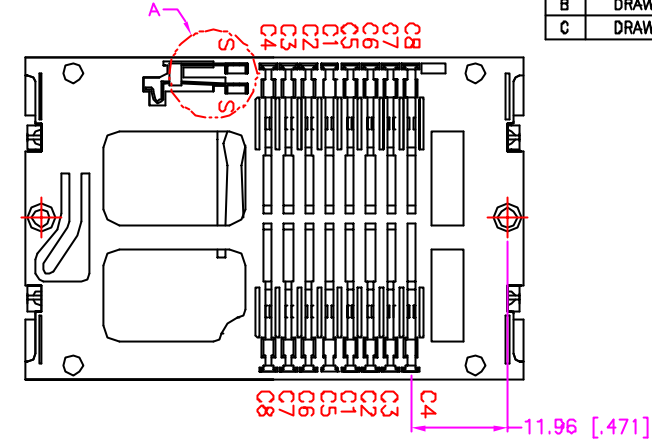
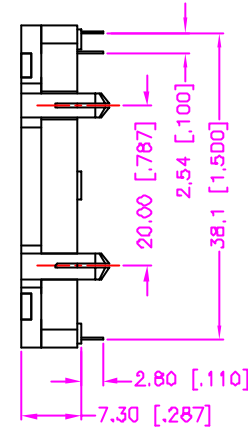


REV.	DESCRIPTION	DATE
A	RELEASE	Dec. 20, 2003
B	DRAW MODIFY	Oct. 03, 2003
C	DRAW MODIFY	Mar. 18, 2004

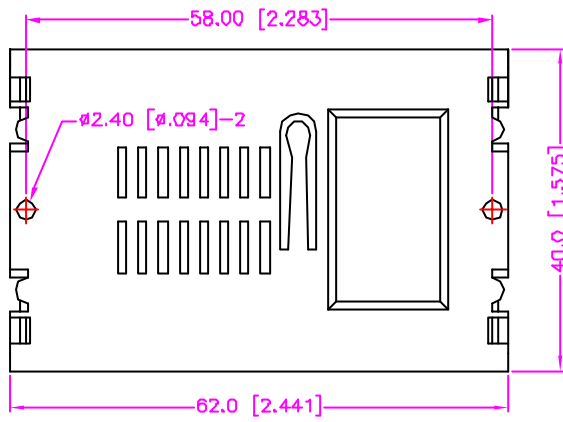

**RECOMMEND P.C.B. LAYOUT
TOP VIEW**

ORDER INFORMATION :

54 - 12 03 * - *

SERIES CODE NUMBER OF POSITIONS
 (8 OR 16 PINS)

TYPE 03 SWITCH OPTIONS
 1 : NORMAL CLOSE
 2 : NORMAL OPEN

MATERIALS

- HOUSING : POLYESTER (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE, GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.

SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 100m OHMS MAX.
- OPERATING TEMPERATURE : -40°C TO +60°C
- DURABILITY : 100000 CYCLES.

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.xxx .0000=±. ANG.=±3°	DRAWER <i>MUS</i>	Astron WWW.ASTRON.COM.TW		
UNITS : mm [Inch]	CHECK <i>Katherlin</i>		NAME MEMORY CARD SMART CARD READER CONNECTOR 2.54mm PITCH THROUGH HOLE TYPE	
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. C	DRAW NO. C254-1203
				D9005