REV.	DESCRIPTION	DATE
A	RELEASE	Dec. 20, 2003
B	DRAW MODIFY	Oct. 03, 2003
C	DRAW MODIFY	Mar. 18, 2004

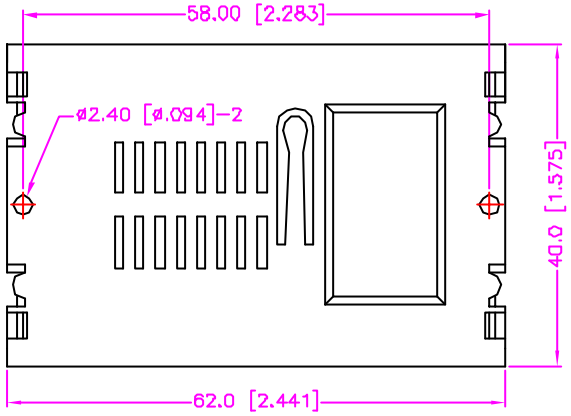

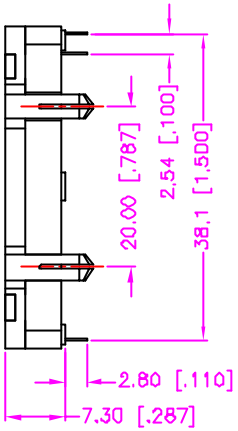

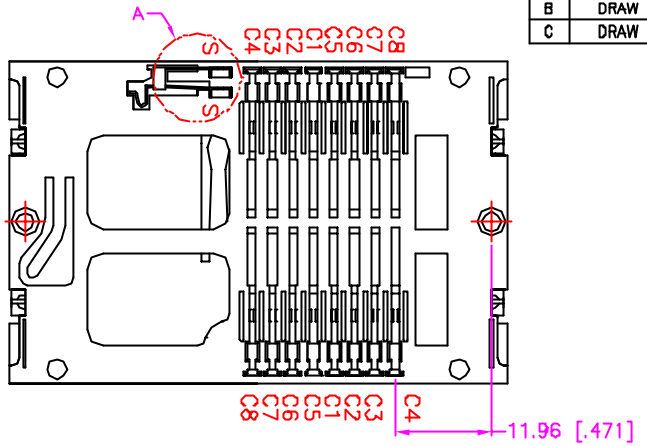

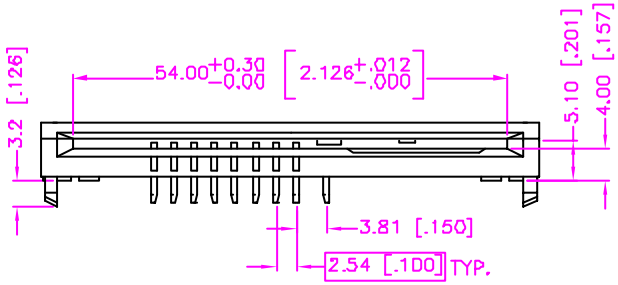



NORMAL OPEN
A VIEW



NORMAL CLOSE
A VIEW

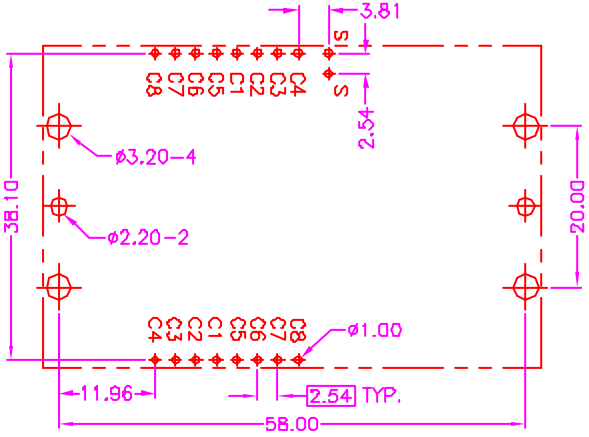

RECOMMEND P.C.B. LAYOUT
TOP VIEW

ORDER INFORMATION :

54 - 12 03 * - *

- SERIES CODE
- TYPE 03
- SWITCH OPTIONS
  1 : NORMAL CLOSE
  2 : NORMAL OPEN
- NUMBER OF POSITIONS (8 OR 16 PINS)

MATERIALS

1. HOUSING : POLYESTER (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE, GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 100m OHMS MAX.
5. OPERATING TEMPERATURE : -40°C TO +60°C
6. DURABILITY : 100000 CYCLES.

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER SUE CHECK Katherlin APP'D LION PRODUCT SPEC. —	Astron WWW.ASTRON.COM.TW NAME MEMORY CARD SMART CARD READER CONNECTOR 2.54mm PITCH THROUGH HOLE TYPE
UNITS : mm [inch]		DRAW NO. C254-1203
SCALE NONE / SIZE A4	SHEET 1 OF 1 / REV. C	09005