

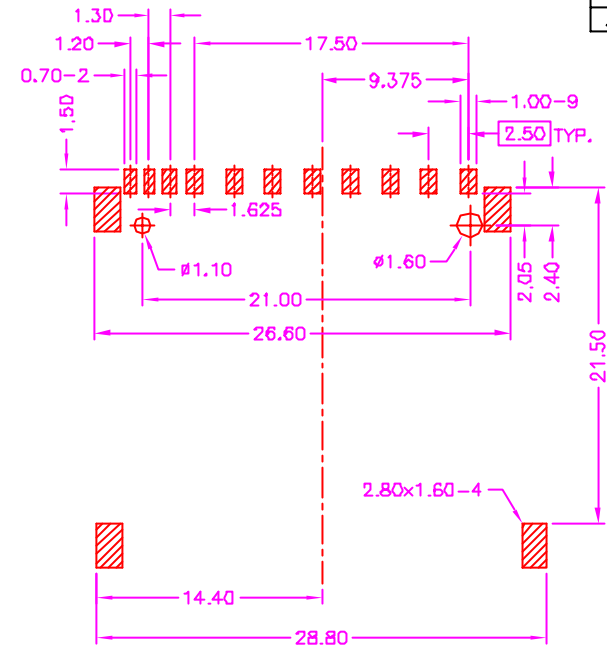
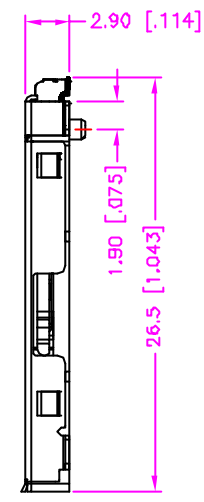


REV.	DESCRIPTION	DATE
—	RELEASE	Dec. 13, 2002
1	DRAW MODIFY	Dec. 20, 2002
2		

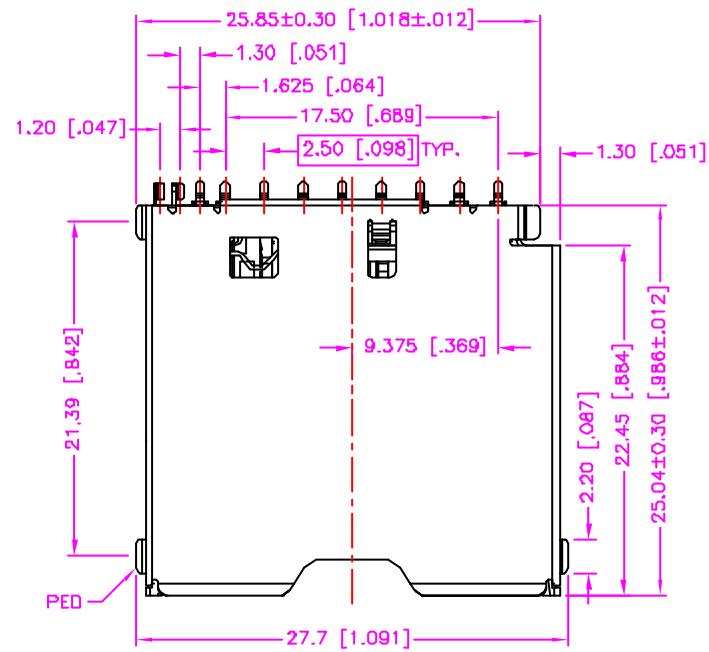

RECOMMEND P.C.B. LAYOUT  
TOP VIEW

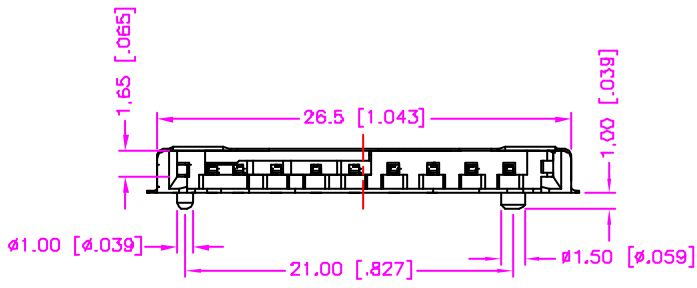

ORDER INFORMATION :

54 - 21 07 - 9 W

SERIES CODE  
TYPE 07  
(STANDOFF=0.00mm)  
WHITE IN HOUSING COLOR  
NUMBER OF POSITIONS

MATERIALS

- HOUSING : HI.-TEMP. PLASTIC (UL 94V-0).
- TERMINAL : COPPER ALLOY, GOLD PLATING ON CONTACT, TIN/LEAD PLATING ON SOLDER TAIL.
- SHELL : STAINLESS STEEL, NICKEL PLATING.
- PED : GOLD PLATING.

SPECIFICATION

- CURRENT RATING : 0.5 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 100m OHMS MAX.
- OPERATING TEMPERATURE : -55°C TO +85°C.
- MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.

TOLERANCE .0±0.30 [.012] .00±0.20 [.008] .000±0.10 [.004] .0000±. ANG.=±3°	DRAWER <i>Katherton</i>	ASTRON TECHNOLOGY CORP.
	CHECK <i>Sub</i>	
UNITS : mm [inch]	APP'D <i>ASBY</i>	DRAW NO. C254-2106
	PRODUCT SPEC. —	SCALE NONE SIZE A4 SHEET 1 OF 1 REV. B 10019