
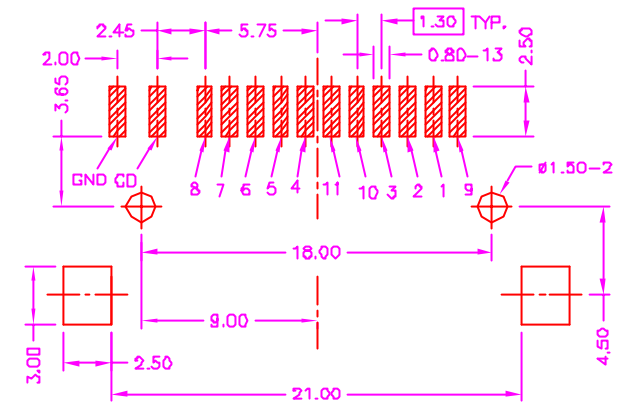


REV.	DESCRIPTION	DATE
—	RELEASE	Dec. 02, 2003
1		
2		

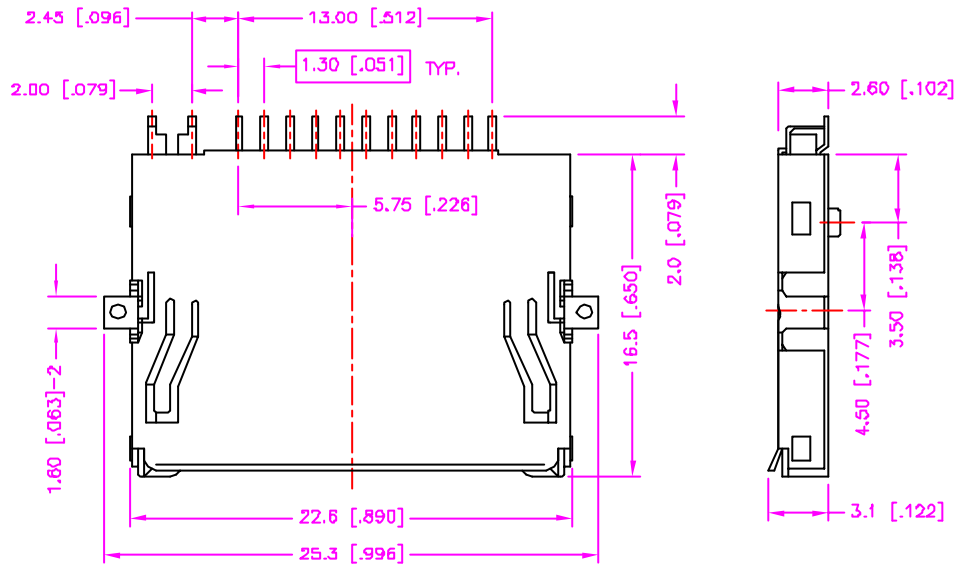

RECOMMEND P.C.B. LAYOUT
TOP VIEW

ORDER INFORMATION :

54 - 23 01 - 11
 SERIES CODE TYPE 01 NUMBER OF POSITIONS


MATERIALS

- HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
- TERMINAL : COPPER ALLOY, GOLD PLATING ON CONTACT, TIN/LEAD PLATING ON SOLDER TAIL (t=0.20mm)
- SHELL : STAINLESS STEEL. (t=0.20mm)

SPECIFICATION

- CURRENT RATING : 0.5 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 100M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 50m OHMS MAX.
- OPERATING TEMPERATURE : -25°C TO +85°C.
- MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.
- DURABILITY : 10,000 CYCLES.

CIRCUIT :



TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±0.XX .0000=±. ANG.=±3°	DRAWER <i>PUB</i>	Astron ASTRON TECHNOLOGY CORP. NAME MEMORY CARD MINI SD CONNECTOR P.C.B. MOUNT SMT DRAW NO. C254-2301
	CHECK <i>Katherlin</i>	
	APP'D <i>LPHON</i>	
	PRODUCT SPEC. —	
UNITS : mm [Inch]	SCALE NONE	SIZE A4
SHEET 1 OF 1	REV. A	T0023