REV.	DESCRIPTION	DATE
—	RELEASE	May 13, 2002
1		
2		

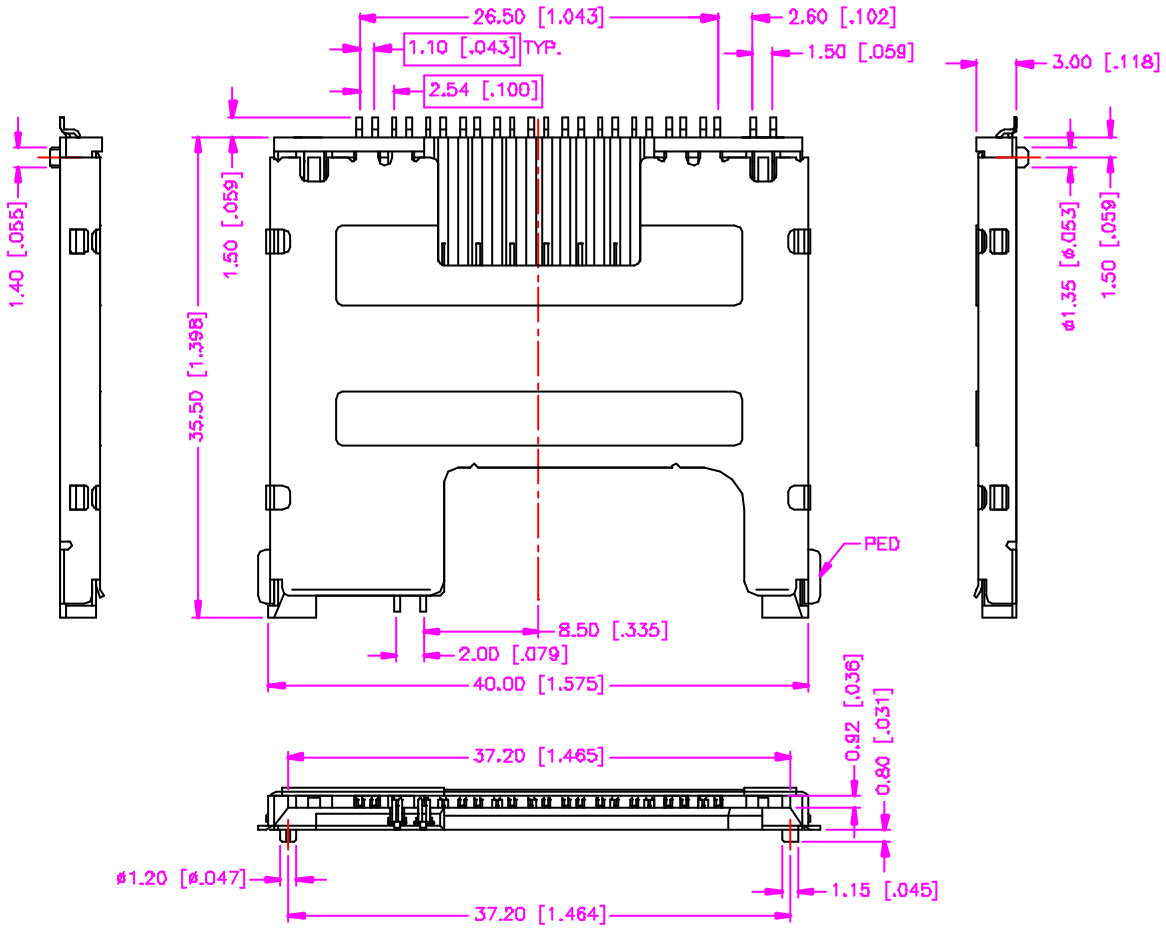

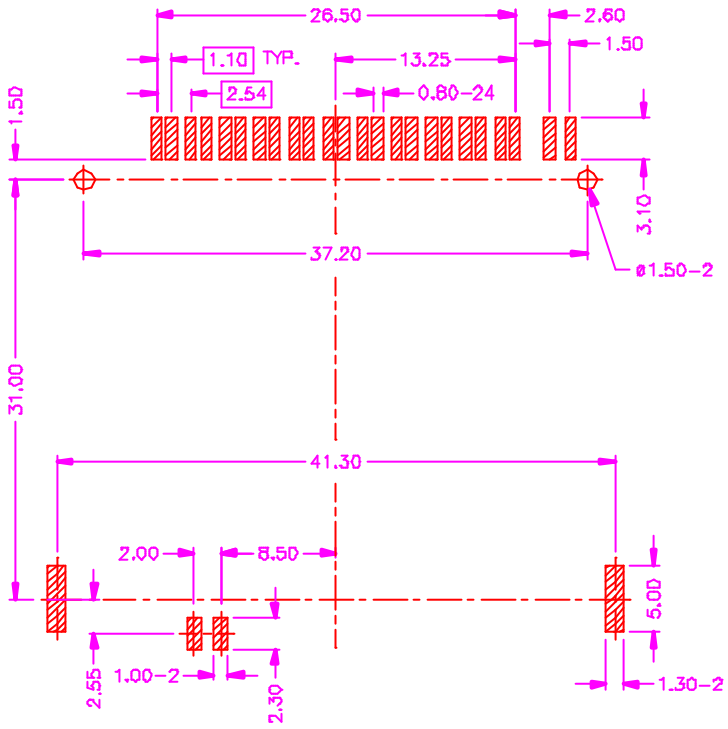

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0).
2. TERMINAL : PHOSPHOR BRONZE, 15u" GOLD PLATING ON CONTACT AREA, TIN/LEAD PLATING ON SOLDER TAIL. (t=0.25mm)
3. SHELL : BRASS, NICKEL PLATING, GOLD PLATING ON PED. (t=0.30mm)

SPECIFICATION

1. CURRENT RATING : 0.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 250V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 100V DC.
4. CONTACT RESISTANCE : 40m OHMS MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.
7. DURABILITY : 5000 CYCLES.

ORDER INFORMATION :

54 - 26 04 3 - B - 1

- 54 - 26 : SERIES CODE
- 04 : TYPE 04
- 3 : 3.3V WITH WRITE PROTECT NORMAL OPEN
- B : BLACK IN HOUSING COLOR
- 1

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER Katherlin CHECK SUE APP'D WINKY PRODUCT SPEC. —	Astron ASTRON TECHNOLOGY CORP.	
UNITS : mm [Inch]		NAME MEMORY CARD SMC READER CONNECTOR P.C.B. MOUNT, SMT TYPE	
		DRAW NO. C254-2607	
SCALE NONE / SIZE A4	SHEET 1 OF 1 / REV. A	10019	