
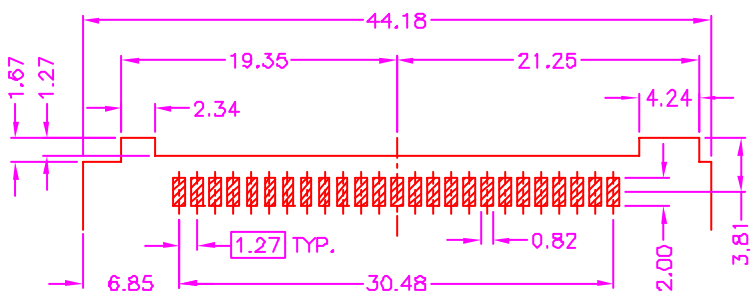
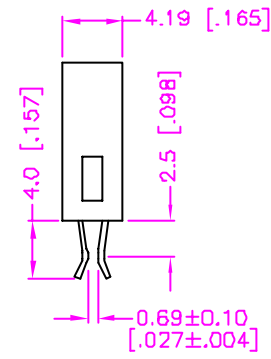
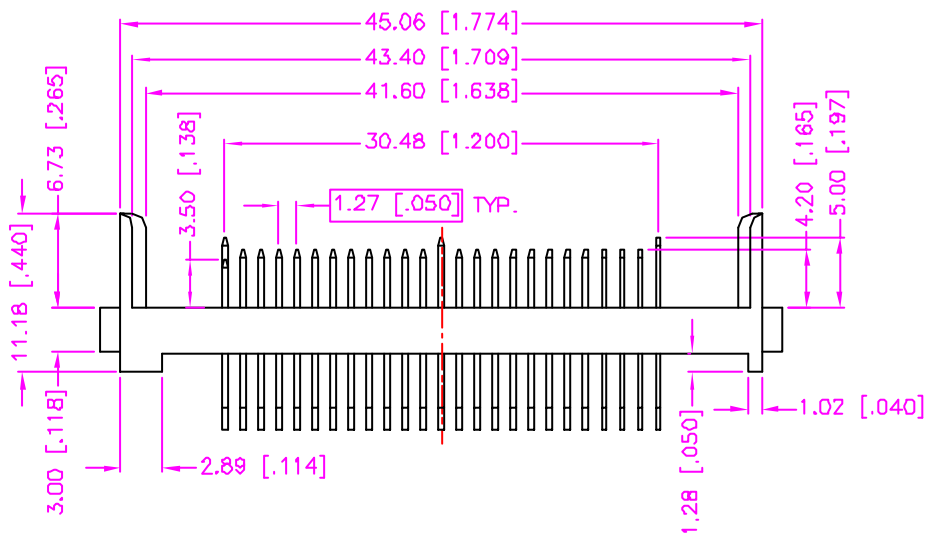


REV.	DESCRIPTION	DATE
—	RELEASE	Sep. 7, 2000
1	P/N MODIFY	Oct. 5, 2000
2	MATERIAL MODIFY	Jun. 1, 2001

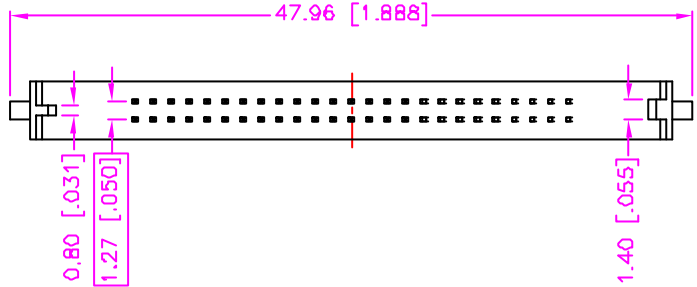

RECOMMEND P.C.B. LAYOUT  
 BOTH SIDE

### MATERIALS

- HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE, GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.

### SPECIFICATION

- CURRENT RATING : 0.5 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M OHMS MIN. AT 50V DC.
- OPERATING TEMPERATURE : -25°C TO +85°C.

### ORDER INFORMATION :

54 - 71 02 - 50

SERIES CODE

NUMBER OF POSITIONS

TYPE 02

TOLERANCE .0=±.0.30 [.012] .00=±0.20 [.008] .000=±.xxx .0000=±. ANG.=±3°	DRAWER <i>Katherine</i> CHECK <i>L90N</i> APP'D <i>SUB</i>	 <b>ASTRON TECHNOLOGY CORP.</b> NAME MEMORY CARD CF CARD, 1.27mm PITCH STRADDLE TYPE, MALE
 UNITS : mm [inch]	PRODUCT SPEC. —	
SCALE NONE	SIZE A4	DRAW NO. C254-7101
SHEET 1 OF 1	REV. C	10018