REV.	DESCRIPTION	DATE
—	RELEASE	Aug. 23, 2002
1	DRAW MODIFY	Sep. 25, 2002
2	P/N MODIFY	Oct. 03, 2002

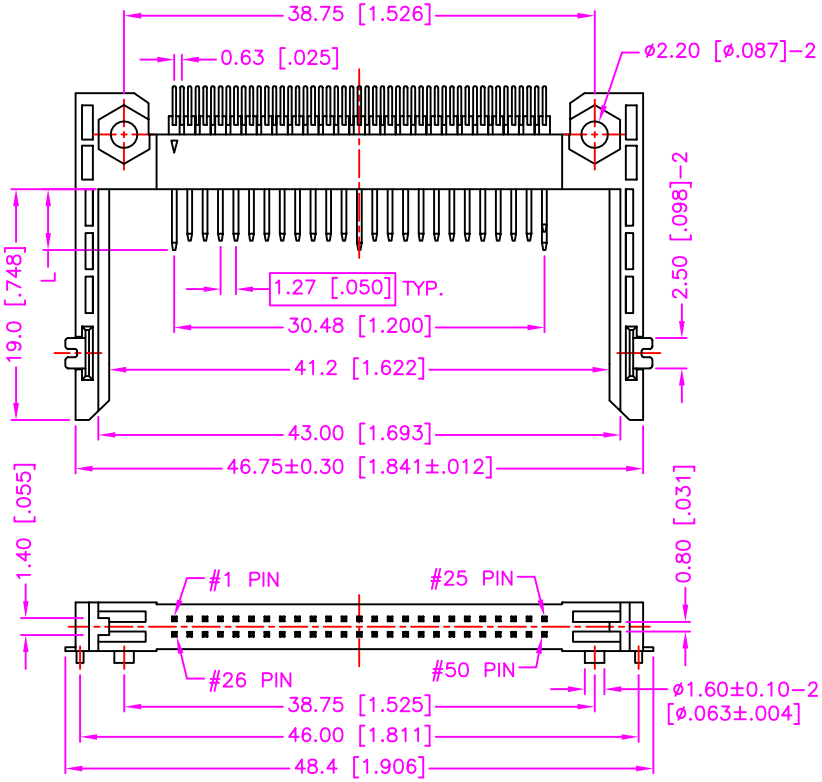

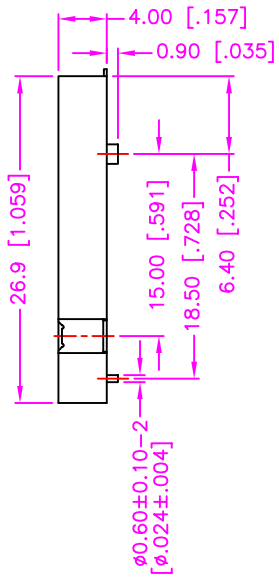

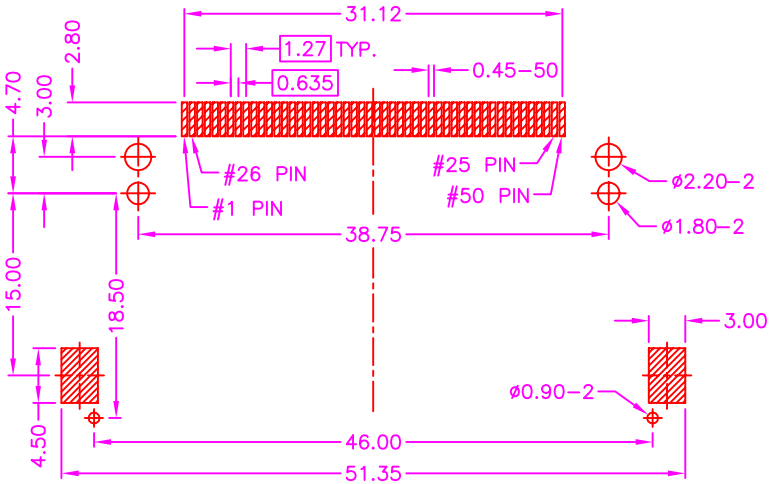

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

1. HOUSING : HI.–TEMP. PLASTIC (UL 94V–0).
2. TERMINAL : COPPER ALLOY, GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.

SPECIFICATION

1. CURRENT RATING : 0.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. OPERATING TEMPERATURE : –25°C TO +60°C.
5. MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.

ORDER INFORMATION :

54 – 71 24 A – 50 W

- 54 – 71: SERIES CODE
- 24: TYPE 24
- 50: NUMBER OF POSITIONS
- W: WHITE IN HOUSING COLOR

DIM. : L±0.15 [±.006]	PIN NUMBER
3.50 [.138]	25, 26
4.25 [.167]	ALL OTHER PINS
5.00 [.197]	1, 13, 38, 50

TOLERANCE
.0=±0.30 [.012]
.00=±0.20 [.008]
.000=±.XXX
.0000=±.
ANG.=±3°

UNITS : mm [inch]

DRAWER: Katherlin
CHECK: SUE
APP'D: ALEX
PRODUCT SPEC.: —

Astron
ASTRON TECHNOLOGY CORP.

NAME: MEMORY CARD
CF CARD, 1.27mm PITCH
P.C.B. MOUNT, SMT, MALE
(NORMAL TYPE–0.00mm STANDOFF)

DRAW NO. C254–7131

SCALE NONE | SIZE A4 | SHEET 1 OF 1 | REV. C | 10019