
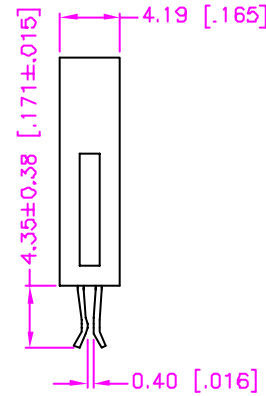
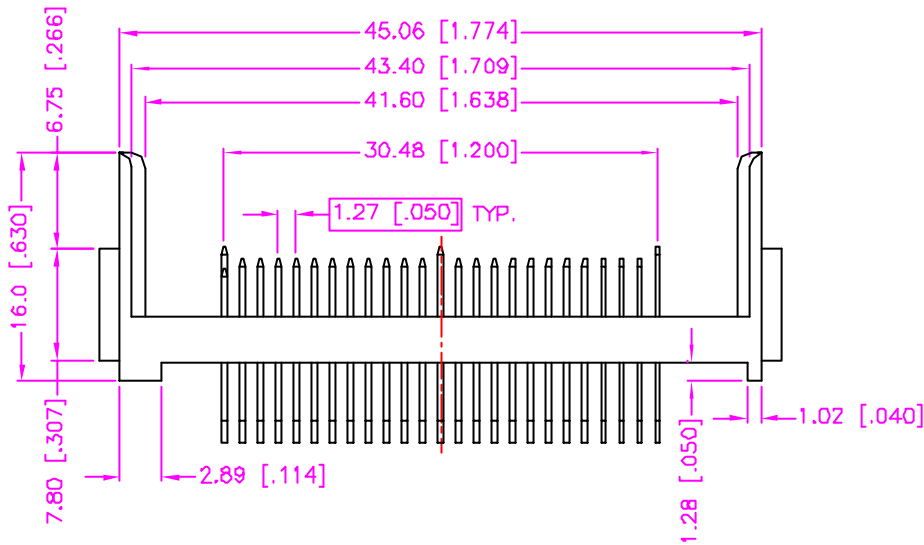


REV.	DESCRIPTION	DATE
—	RELEASE	Nov. 20, 2002
1		
2		

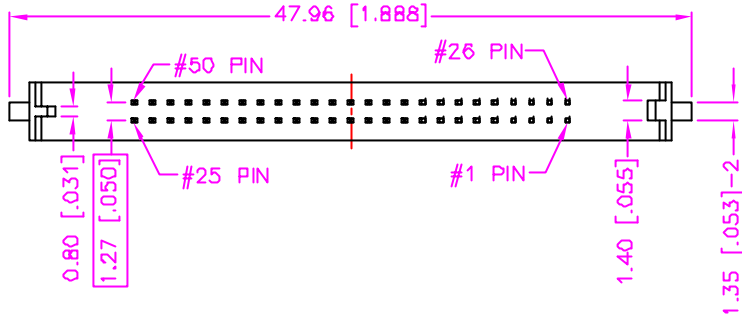

### MATERIALS


1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE, 15 $\mu$  GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.

### SPECIFICATION

1. CURRENT RATING : 0.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. OPERATING TEMPERATURE : -25°C TO +85°C.

### ORDER INFORMATION :

54-710201-50

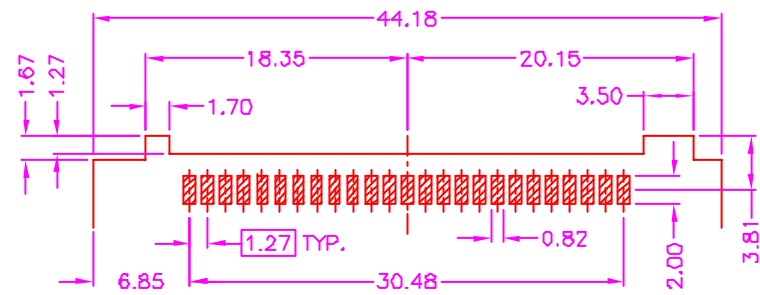

RECOMMEND P.C.B. LAYOUT  
BOTH SIDE

PIN NUMBER	CONTACT LENGTH ± 0.15 [±.006]
25, 26	3.50 [.138]
ALL OTHER PINS	4.20 [.165]
1, 13, 38, 50	5.00 [.197]

TOLERANCE .0 = ±0.30 [.012] .00 = ±0.20 [.008] .000 = ±.XXX .0000 = ±. ANG. = ±3°	DRAWER <i>Katherine</i>	<b>Astron</b> ASTRON TECHNOLOGY CORP.
CHECK <i>SUS</i>	APP'D <i>ALB</i>	
PRODUCT SPEC. —	NAME MEMORY CARD CF CARD, 1.27mm PITCH STRADDLE TYPE, MALE, 50 PINS	DRAW NO. C254-7138
UNITS : mm [inch]	REV. A	
SCALE NONE	SIZE A4	SHEET 1 OF 1
		REV. A
		10018