
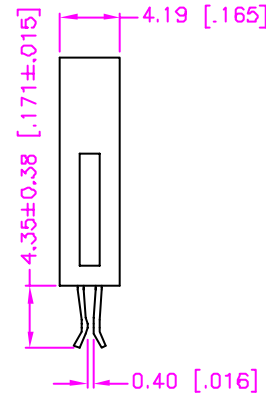
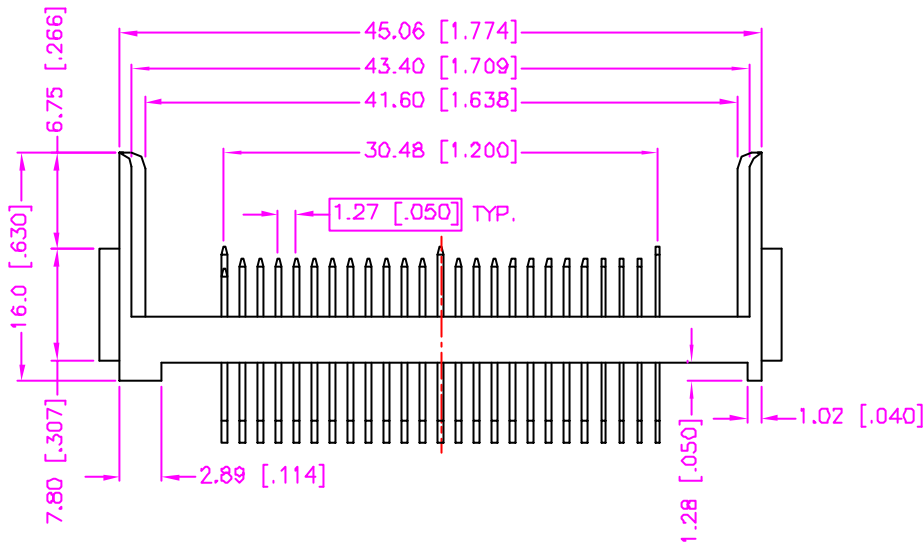


REV.	DESCRIPTION	DATE
—	RELEASE	Nov. 20, 2002
1		
2		

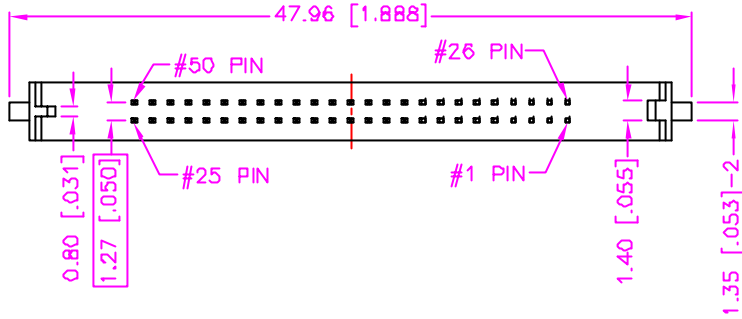

MATERIALS


1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE, 15 μ GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.

SPECIFICATION

1. CURRENT RATING : 0.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. OPERATING TEMPERATURE : -25°C TO +85°C.

ORDER INFORMATION :

54-710201-50

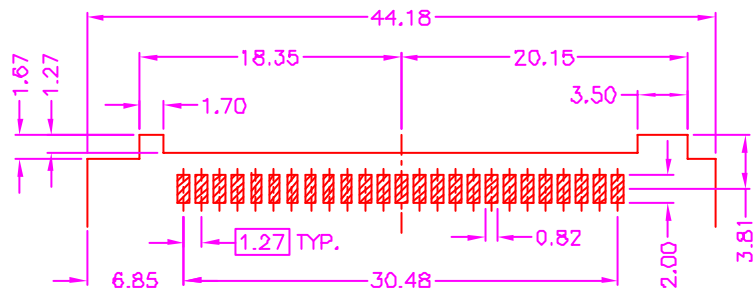

RECOMMEND P.C.B. LAYOUT
BOTH SIDE

PIN NUMBER	CONTACT LENGTH±0.15 [±.006]
25, 26	3.50 [.138]
ALL OTHER PINS	4.20 [.165]
1, 13, 38, 50	5.00 [.197]

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°		DRAWER <i>Katherine</i>		 ASTRON TECHNOLOGY CORP. NAME MEMORY CARD CF CARD, 1.27mm PITCH STRADDLE TYPE, MALE, 50 PINS DRAW NO. C254-7138	
CHECK <i>SUS</i>		APP'D <i>ALB</i>			
PRODUCT SPEC. —		SCALE NONE			
UNITS : mm [inch]		SIZE A4	SHEET 1 OF 1	REV. A	10018