
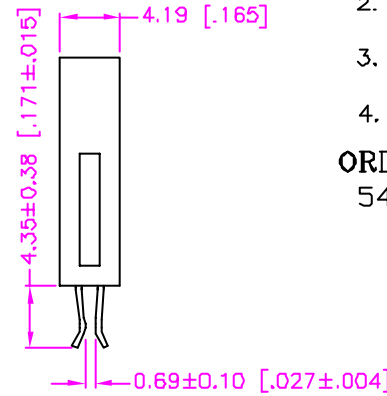
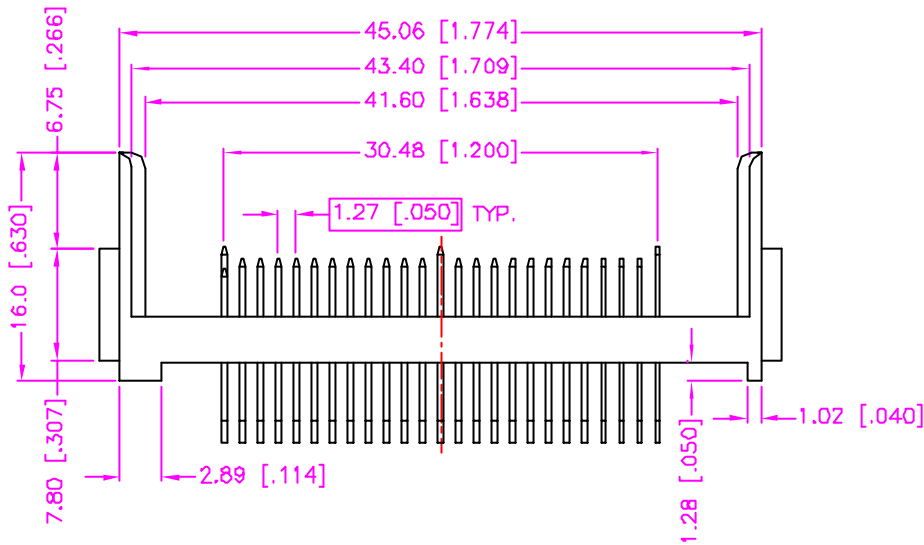


REV.	DESCRIPTION	DATE
—	RELEASE	Dec. 04, 2002
1		
2		

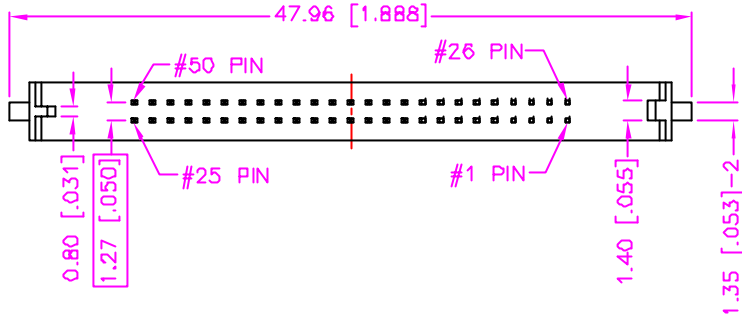

### MATERIALS


1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE, 15 $\mu$  GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.

### SPECIFICATION

1. CURRENT RATING : 0.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. OPERATING TEMPERATURE : -25°C TO +85°C.

### ORDER INFORMATION :

54-710203-50

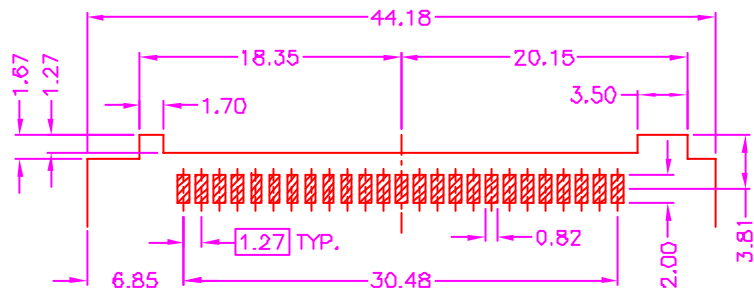

**RECOMMEND P.C.B. LAYOUT  
BOTH SIDE**

PIN NUMBER	CONTACT LENGTH±0.15 [±.006]
25, 26	3.50 [.138]
ALL OTHER PINS	4.20 [.165]
1, 13, 38, 50	5.00 [.197]

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>FUS</i>	<b>Astron</b> ASTRON TECHNOLOGY CORP.
	CHECK <i>Katherine</i>	
UNITS : mm [inch]	APP'D <i>ALB</i>	DRAW NO. C254-7140
	PRODUCT SPEC. —	REV. A
SCALE NONE	SIZE A4	SHEET 1 OF 1
		REV. A
		10018