
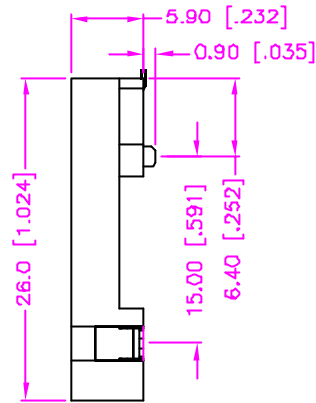


REV.	DESCRIPTION	DATE
—	RELEASE	Feb. 19, 2003
1		
2		

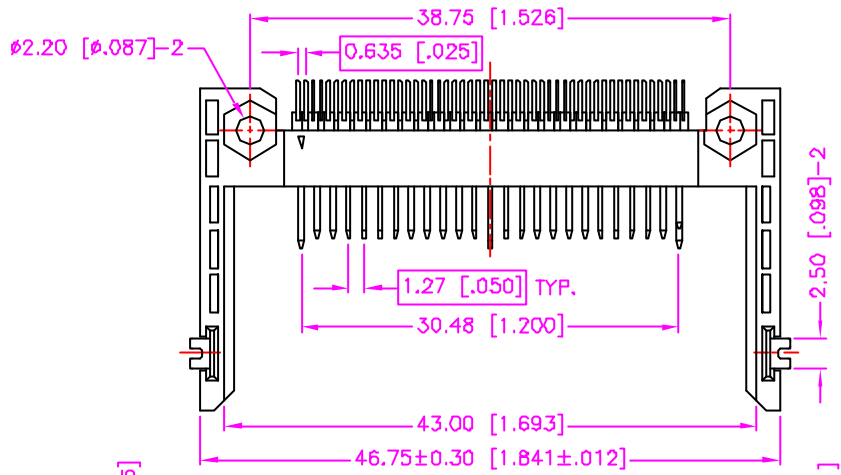

MATERIALS

- HOUSING : HI-TEMP. PLASTIC (UL 94V-0).
- TERMINAL : COPPER ALLOY, GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.

SPECIFICATION

- CURRENT RATING : 0.5 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
- OPERATING TEMPERATURE : -25°C TO +60°C.
- MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.

ORDER INFORMATION :



54 - 71 29 - 50 W

SERIES CODE

TYPE 29

WHITE IN HOUSING COLOR

NUMBER OF POSITIONS

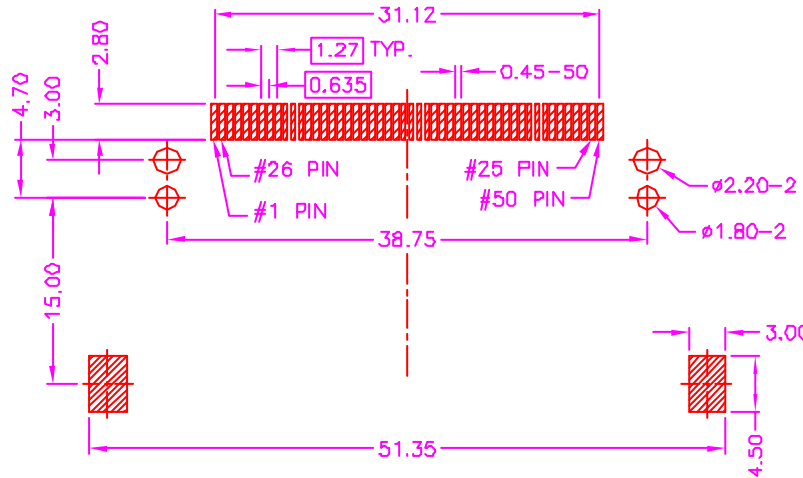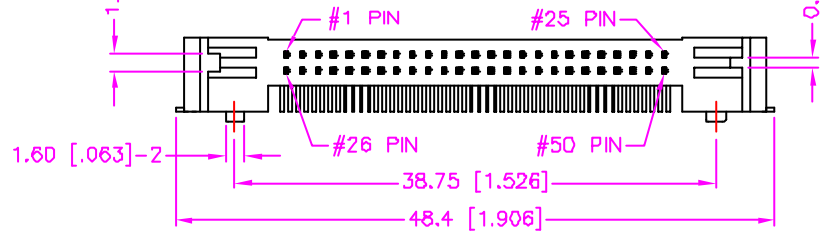

RECOMMEND P.C.B. LAYOUT
TOP VIEW

PIN NUMBER	CONTACT LENGTH±0.15 [±.006]
25, 26	3.50 [.138]
ALL OTHER PINS	4.25 [.167]
1, 13, 38, 50	5.00 [.197]

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.xxx .0000=±. ANG.=±3°	DRAWER <i>SUE</i> CHECK <i>LEON</i> APP'D <i>Katherlin</i>	Astron ASTRON TECHNOLOGY CORP. NAME MEMORY CARD CF CARD, 1.27mm PITCH P.C.B. MOUNT, SMT, MALE (NORMAL TYPE-2.00mm)
UNITS : mm [inch]	PRODUCT SPEC. —	
SCALE NONE	SIZE A4	DRAW NO. C254-7143
SHEET 1 OF 1	REV. A	10019