
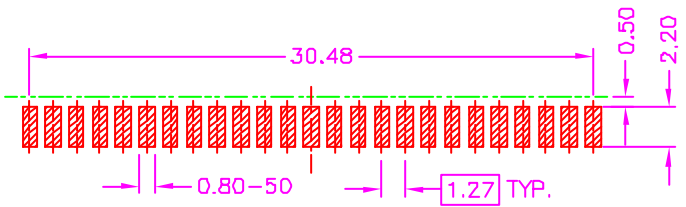

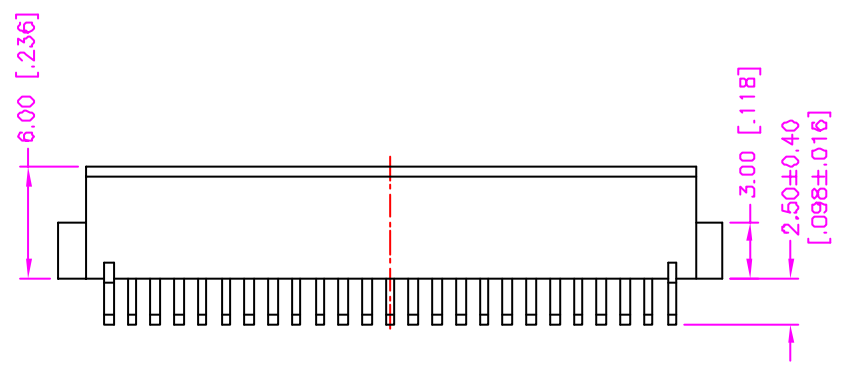


REV.	DESCRIPTION	DATE
—	RELEASE	Jul. 19, 2002
1	DRAW MODIFY	Mar. 17, 2003
2		

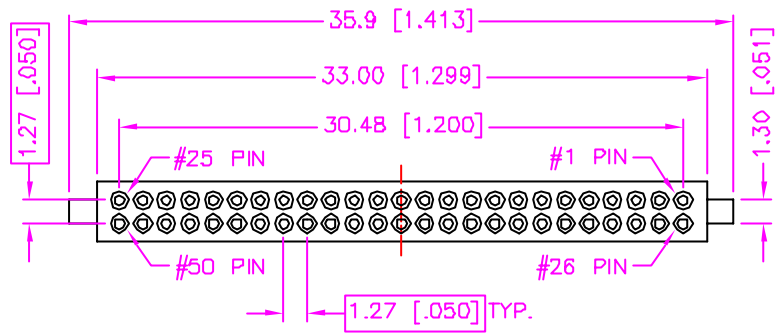

RECOMMEND P.C.B. LAYOUT
BOTH SIDES


MATERIALS

- HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
- TERMINAL : COPPER ALLOY, GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL. (t=0.10mm)

SPECIFICATION

- CURRENT RATING : 0.5 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 40m OHMS MAX.
- OPERATING TEMPERATURE : -40°C ~ +85°C.

ORDER INFORMATION :

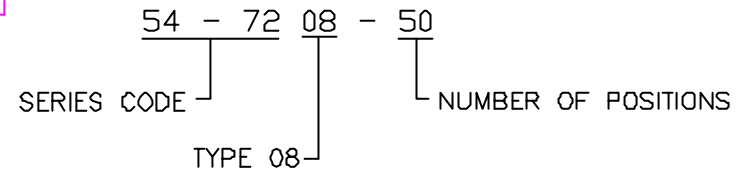

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.xxx .0000=±. ANG.=±3°		DRAWER <i>MUB</i> CHECK <i>Katharin</i> APP'D <i>ALC</i>	Astron ASTRON TECHNOLOGY CORP. NAME MEMORY CARD CF CARD, 1.27mm PITCH STRADDLE TYPE, FEMALE
UNITS : mm [inch]		PRODUCT SPEC. —	
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. B
DRAW NO. C254-7209		DRAW NO. 16002/03006	