REV.	DESCRIPTION	DATE
A	RELEASE	Sep. 03, 2003
B	P/N MODIFY	Nov. 10, 2003
C	DRAW MODIFY	Jun. 08, 2004

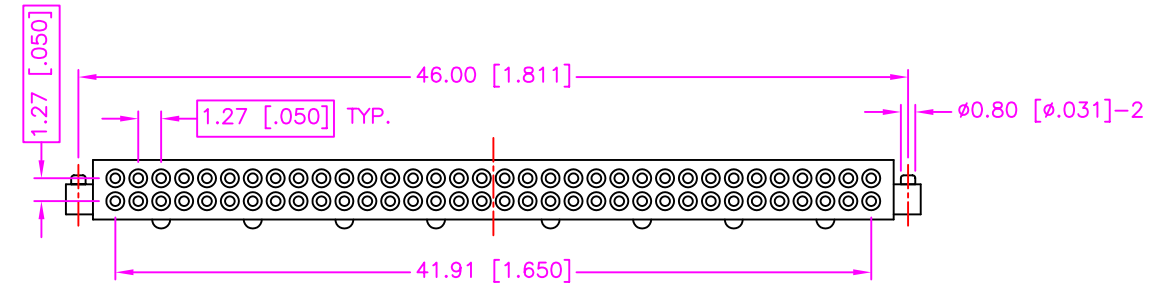

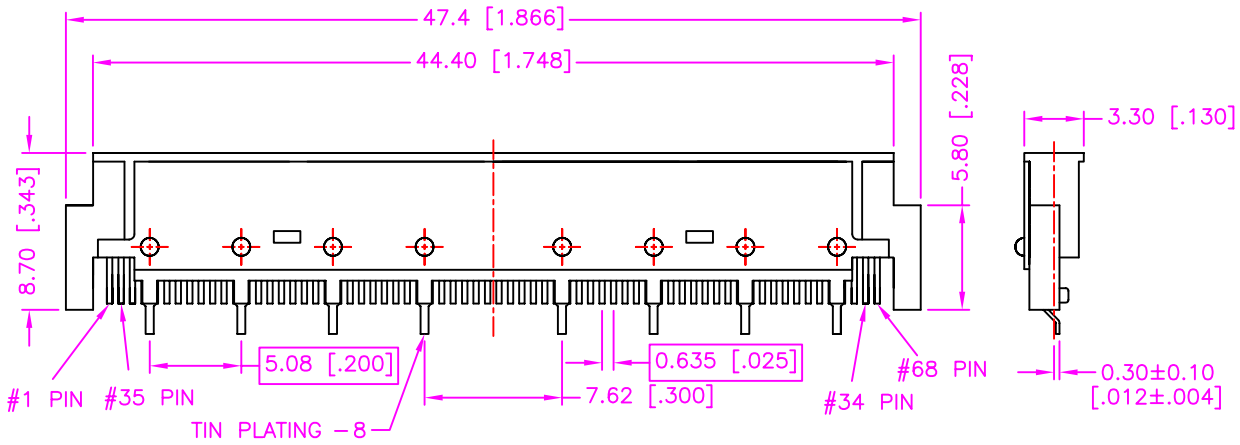

MATERIALS

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE, GOLD PLATING ON CONTACT AREA, TIN PLATED ON SOLDER TAIL. (t=0.15mm)
3. GROUND PLATE : COPPER ALLOY, GOLD PLATING ON CONTACT AREA, TIN PLATED ON SOLDER TAIL. (t=0.20mm)

SPECIFICATION

1. CURRENT RATING : 0.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 40m OHMS MAX.
5. OPERATING TEMPERATURE : -20°C TO +85°C.
6. DURABILITY : 10,000 CYCLES.
7. MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.

ORDER INFORMATION :

54 - 72 13 - 68 - *

- 54 - 72 : SERIES CODE
- 13 : TYPE 13
- 68 : NUMBER OF POSITIONS
- * : CONTACT & SHELL PLATING OPTIONS
  - A : CONTACT 15u" & SHELL 8u" GOLD PLATING
  - BLANK : ALL GOLD FLASH

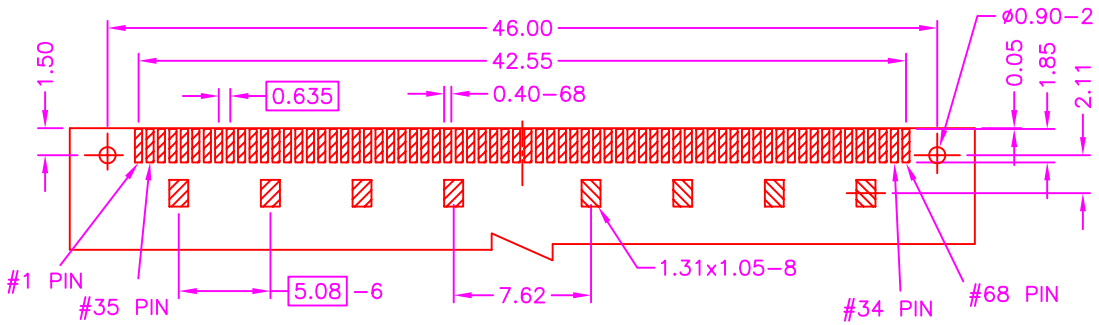

RECOMMEND P.C.B. LAYOUT
TOP VIEW

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER: SUE CHECK: ERIC APP'D: LION PRODUCT SPEC.	Astron WWW.ASTRON.COM.TW	
UNITS : mm [inch]		NAME: MEMORY CARD PC CARD, 1.27mm PITCH SMT TYPE, FEMALE 0.30mm OFFSET	
		DRAW NO. C254-7218	
SCALE NONE / SIZE A4	SHEET 1 OF 1 / REV. C	14001	