
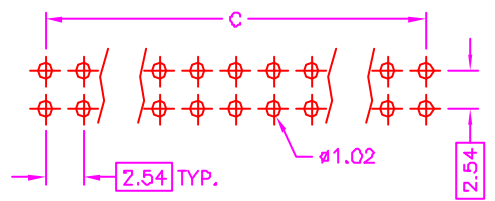

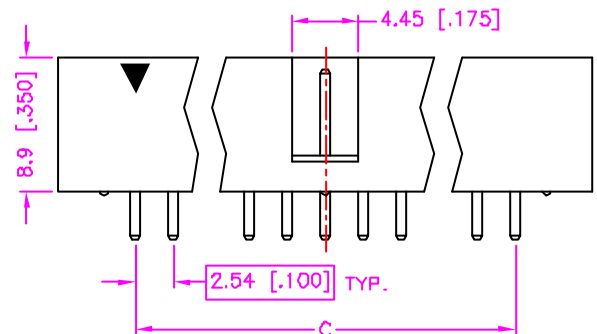


REV.	DESCRIPTION	DATE
—	RELEASE	Sep. 3, 2001
1	DRAW MODIFY	Apr. 10, 2003
2	DRAW MODIFY	Sep. 09, 2003

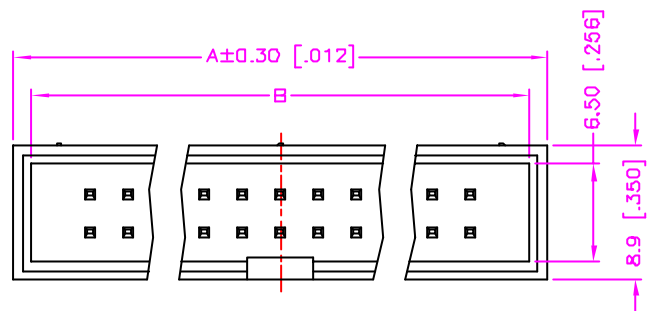

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

- HOUSING : THERMOPLASTIC (UL 94V-0).
- TERMINAL : S.Q. 0.64mm BRASS.

SPECIFICATION

- CURRENT RATING : 3 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 5000M OHMS MIN. AT 1000V DC.
- OPERATING TEMPERATURE : -55°C TO +105°C.
- MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS. (HI.-TEMP. PLASTIC)

ORDER INFORMATION :

26 - 01 * - 2 ** * - * G

SERIES CODE | HOUSING OPTIONS | DUAL ROWS | NUMBER OF POSITIONS PER ROW | HOUSING COLOR OPTIONS | CONTACT PLATING OPTIONS | GOLD PLATING ON SOLDER TAIL

HOUSING OPTIONS
BLANK : NORMAL
H : HI.-TEMP. PLASTIC

HOUSING COLOR OPTIONS
BLANK : BLACK
L : BLUE
W : WHITE

CONTACT PLATING OPTIONS
1 : GOLD FLASH
2 : .000010" GOLD
3 : .000015" GOLD
5 : .000030" GOLD

NUMBER OF POSITION	DIMENSIONS			NUMBER OF POSITION	DIMENSIONS		
	A	B	C		A	B	C
6	15.22[.599]	12.92[.509]	5.08[.200]	26	40.62[1.599]	38.32[1.509]	30.48[1.200]
8	17.76[.699]	15.46[.609]	7.62[.300]	30	45.70[1.799]	43.40[1.709]	35.56[1.400]
10	20.30[.799]	18.00[.709]	10.16[.400]	32	48.26[1.900]	45.96[1.809]	38.10[1.500]
12	22.84[.899]	20.54[.809]	12.70[.500]	34	50.78[1.999]	48.48[1.909]	40.64[1.600]
14	25.38[.999]	23.08[.909]	15.24[.600]	40	58.40[2.299]	56.10[2.209]	48.26[1.900]
16	27.92[1.099]	25.62[1.009]	17.78[.700]	50	71.10[2.799]	68.80[2.709]	60.96[2.400]
20	33.00[1.299]	30.70[1.209]	22.86[.900]	60	83.80[3.299]	81.50[3.209]	73.66[2.900]
24	38.08[1.499]	35.78[1.409]	27.94[1.100]	64	88.88[3.499]	86.58[3.409]	78.74[3.100]

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.xxx .0000=±. ANG.=±3°	DRAWER <i>Katherine</i> CHECK <i>LJON</i> APP'D <i>PLB</i>	 ASTRON TECHNOLOGY CORP. NAME SHROUDED HEADER 2.54mm PITCH, P.C.B. MOUNT VERTICAL
 UNITS : mm [inch]	PRODUCT SPEC. 317-0015	
SCALE NONE	SIZE A4	SHEET 1 OF 1
REV. C		DRAW NO. C326-0104
05005/09001/14003		