
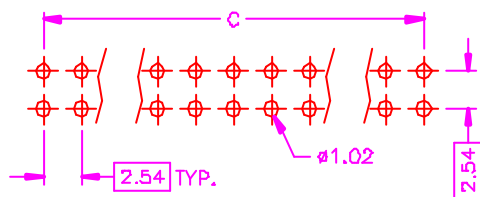
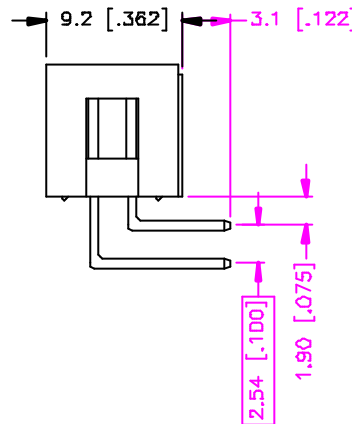
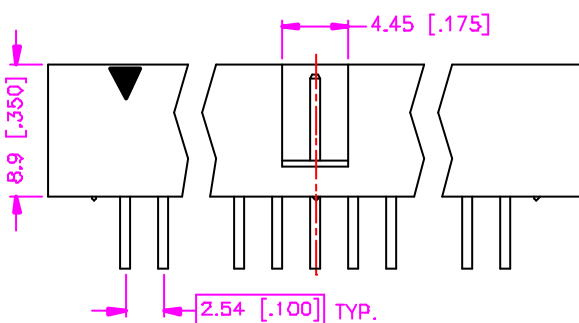


REV.	DESCRIPTION	DATE
—	RELEASE	Sep. 3, 2001
1	P/N MODIFY	JUL 14, 2002
2		

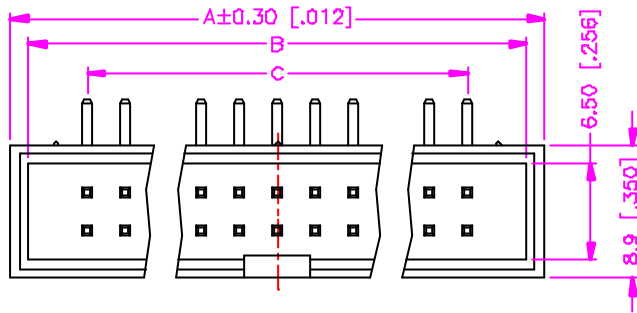

RECOMMEND P.C.B. LAYOUT  
BOTTOM VIEW

### MATERIALS

- HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
- TERMINAL : S.Q. 0.64mm BRASS.

### SPECIFICATION

- CURRENT RATING : 3 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 5000M OHMS MIN. AT 1000V DC.
- OPERATING TEMPERATURE : -55°C TO +105°C.
- MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS. (HI.-TEMP. PLASTIC)

### ORDER INFORMATION :

26 - 02 \* - 2 \*\* - \* \*

SERIES CODE | HOUSING OPTIONS | DUAL ROWS | NUMBER OF POSITIONS PER ROW | SOLDER TAIL PLATING OPTIONS | CONTACT PLATING OPTIONS

BLANK : NORMAL  
H : HI.-TEMP. PLASTIC

G : GOLD  
T : TIN

1 : GOLD FLASH  
2 : .000010" GOLD  
3 : .000015" GOLD  
5 : .000030" GOLD

NUMBER OF POSITION	DIMENSIONS			NUMBER OF POSITION	DIMENSIONS		
	A	B	C		A	B	C
6	15.22[.599]	12.92[.509]	5.08[.200]	30	45.70[1.799]	43.40[1.709]	35.56[1.400]
8	17.76[.699]	15.46[.609]	7.62[.300]	32	48.26[1.900]	45.96[1.809]	38.10[1.500]
10	20.30[.799]	18.00[.709]	10.16[.400]	34	50.78[1.999]	48.48[1.909]	40.64[1.600]
14	25.38[.999]	23.08[.909]	15.24[.600]	40	58.40[2.299]	56.10[2.209]	48.26[1.900]
16	27.92[1.099]	25.62[1.009]	17.78[.700]	50	71.10[2.799]	68.80[2.709]	60.96[2.400]
20	33.00[1.299]	30.70[1.209]	22.86[.900]	60	83.80[3.299]	81.50[3.209]	73.66[2.900]
24	38.08[1.499]	35.78[1.409]	27.94[1.100]	64	88.88[3.499]	86.58[3.409]	78.74[3.100]
26	40.62[1.599]	38.32[1.509]	30.48[1.200]	—	—	—	—

TOLERANCE .0=±.0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>Katherlin</i> CHECK <i>SUB</i> APP'D <i>ALBT</i>	 ASTRON TECHNOLOGY CORP. NAME SHROUDED HEADER 2.54mm PITCH, P.C.B. MOUNT RIGHT ANGLE
UNITS : mm [Inch]	PRODUCT SPEC. — 317-0016	
SCALE NONE SIZE A4	SHEET 1 OF 1 REV. B	DRAW NO. C326-0201
		05005/09001/14003