

REV.	DESCRIPTION	DATE
—	RELEASE	Sep. 03, 2002
1	DRAW MODIFY	Mar. 27, 2003
2		

$$A = (\text{NO. OF POSITION PER ROW}) \times 2.54 + 7.87$$





$$(\text{NO. OF POSITION PER ROW}) \times 1.00 + .310$$

$$B = (\text{NO. OF POSITION PER ROW}) \times 2.54 + 5.52$$

$$(\text{NO. OF POSITION PER ROW}) \times 1.00 + .217$$

$$C = (\text{NO. OF POSITION PER ROW} - 1) \times 2.54$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 1.00$$

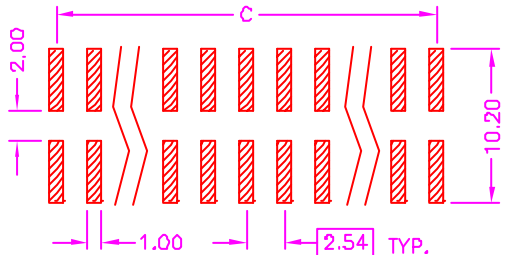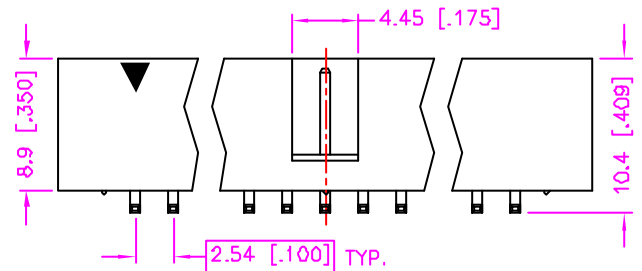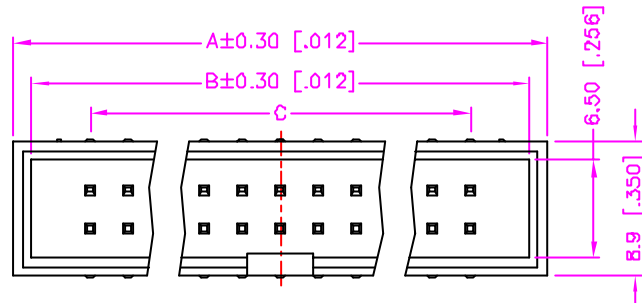

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

- HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
- TERMINAL : S.Q. 0.64mm BRASS.

SPECIFICATION

- CURRENT RATING : 3 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 5000M OHMS MIN. AT 100V DC.
- OPERATING TEMPERATURE : -55°C TO +105°C.
- MAX. PROCESSING TEMPERATURE : 230°C FOR 30 ~ 60 SECONDS.

ORDER INFORMATION :

26 - 03 - 2 ** - * G
 SERIES CODE | DUAL ROWS | NUMBER OF POSITIONS PER ROW | CONTACT PLATING OPTIONS | GOLD PLATING ON SOLDER TAIL

CONTACT PLATING OPTIONS
 1 : GOLD FLASH
 2 : .000010" GOLD
 3 : .000015" GOLD
 5 : .000030" GOLD

TOLERANCE .0=±.0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>PUB</i> CHECK <i>LFOH</i> APP'D <i>Katherkim</i>	 ASTRON TECHNOLOGY CORP. NAME SHROUDED HEADER 2.54mm PITCH, P.C.B. MOUNT SMT TYPE
 UNITS : mm [inch]	PRODUCT SPEC. —	
SCALE NONE	SIZE A4	DRAW NO. C326-0301
SHEET 1 OF 1	REV. B	05005