
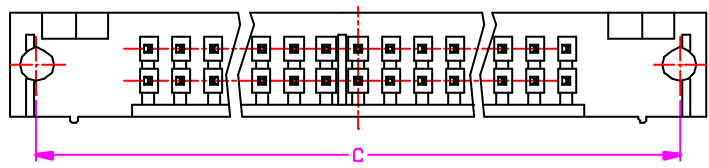
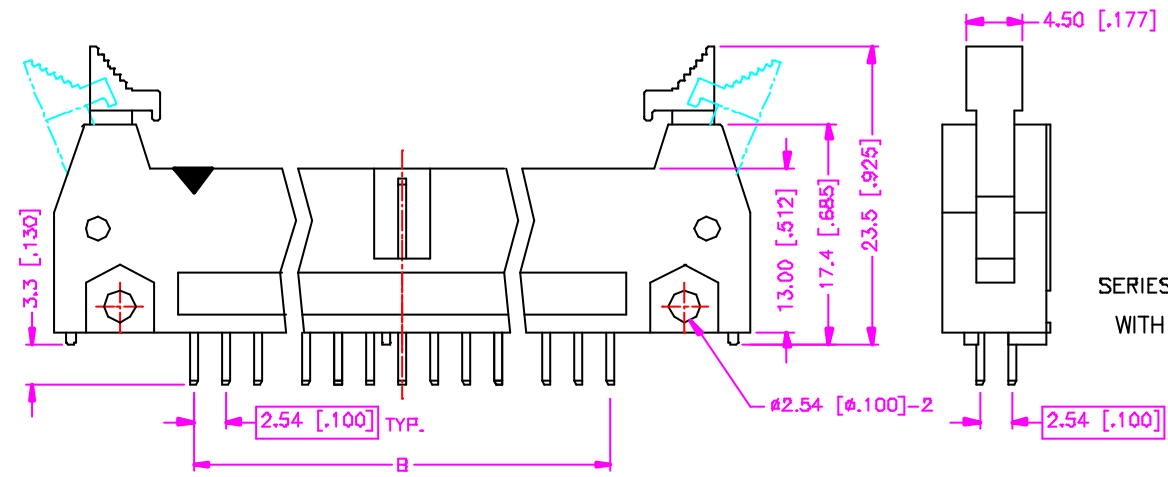


REV.	DESCRIPTION	DATE
—	RELEASE	Aug. 08 2002
1		
2		

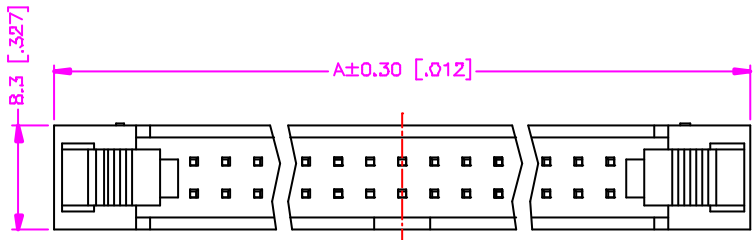



MATERIALS

- HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
- TERMINAL : S.Q. 0.64mm BRASS.

SPECIFICATION

- CURRENT RATING : 3 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 5000M OHMS MIN. AT 1000V DC.
- OPERATING TEMPERATURE : -55°C TO +105°C.

ORDER INFORMATION :

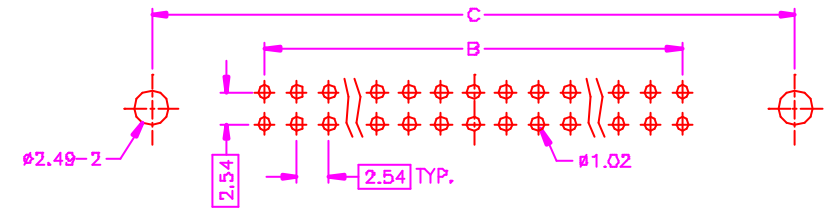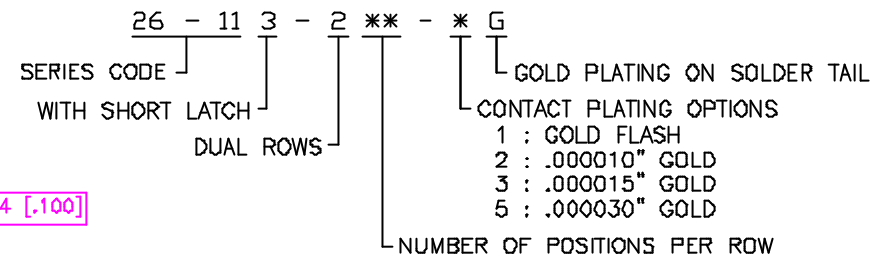

**RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW**

Number Of Position	DIMENSIONS			Number Of Position	DIMENSIONS		
	A	B	C		A	B	C
10	32.00[1.260]	10.16[.400]	27.94[1.100]	34	62.48[2.460]	40.64[1.600]	58.42[2.300]
14	37.08[1.460]	15.24[.600]	33.02[1.300]	36	65.02[2.560]	43.18[1.700]	60.96[2.400]
16	39.62[1.560]	17.78[.700]	35.56[1.400]	40	70.10[2.760]	48.26[1.800]	66.04[2.600]
20	44.70[1.760]	22.86[.900]	40.64[1.600]	50	82.80[3.260]	60.96[2.400]	78.74[3.100]
24	49.78[1.960]	27.94[1.100]	45.72[1.800]	60	95.50[3.760]	73.66[2.900]	91.44[3.600]
26	52.32[2.060]	30.48[1.200]	48.26[1.900]	64	100.58[3.960]	78.74[3.100]	96.52[3.800]
30	57.40[2.260]	35.56[1.400]	53.34[2.100]	—	—	—	—

TOLERANCE .0±0.30 [.012] .00±0.20 [.008] .000±.XXX .0000±. ANG.±3°	DRAWER <i>FUS</i> CHECK <i>Katherine</i> APP'D <i>ALBT</i>	 ASTRON TECHNOLOGY CORP. NAME SHROUDED HEADER 2.54mm PITCH, P.C.B. MOUNT VERTICAL, EJECTOR TYPE (SHORT LATCH)
UNITS : mm [Inch]	PRODUCT SPEC. — 305-0004	
SCALE NONE	SIZE A4	DRAW NO. C326-1103
SHEET 1 OF 1	REV. A	09001