

REV.	DESCRIPTION	DATE
—	RELEASE	Sep. 3, 2001
1	DRAW MODIFY	May. 08, 2003
2		

$$A = (\text{NUMBER OF POSITIONS PER ROW}) \times 2.00 + 7.10$$

$$(\text{NUMBER OF POSITIONS PER ROW}) \times 0.079 + .280$$

$$B = (\text{NUMBER OF POSITIONS PER ROW}) \times 2.00 + 6.00$$

$$(\text{NUMBER OF POSITIONS PER ROW}) \times 0.079 + .236$$

$$C = (\text{NUMBER OF POSITIONS PER ROW} - 1) \times 2.00$$

$$(\text{NUMBER OF POSITIONS PER ROW} - 1) \times 0.079$$

MATERIALS

1. HOUSING : POLYAMIDE (UL 94V-0), BLACK.
2. TERMINAL : S.Q. 0.50mm BRASS.

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 800V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
4. OPERATING TEMPERATURE : -55°C TO +105°C.





ORDER INFORMATION :

26 - 41 - 2 ** - * G

SERIES CODE | DUAL ROWS | NUMBER OF POSITIONS PER ROW | GOLD PLATING ON SOLDER TAIL

CONTACT PLATING OPTIONS

- 1 : GOLD FLASH
- 2 : .000010" GOLD
- 3 : .000015" GOLD
- 5 : .000030" GOLD

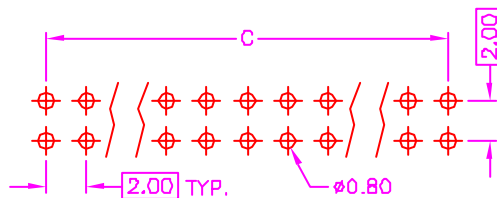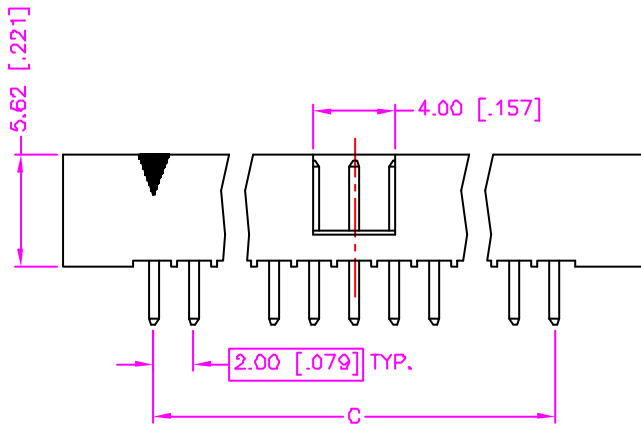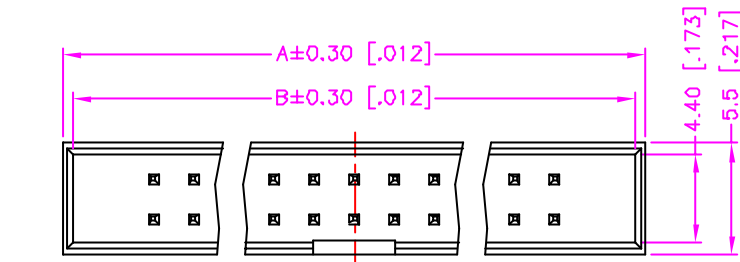

**RECOMMEND P.C.B. LAYOUT
TOP VIEW**

TOLERANCE		DRAWER		ASTRON TECHNOLOGY CORP.
.0 = ±0.30 [.012]		PUB		
.00 = ±0.20 [.008]		CHECK		SHROUDED HEADER 2.00mm PITCH P.C.B. MOUNT VERTICAL
.000 = ±.XXX		LSON		
.0000 = ±.		APP'D		DRAW NO. C326-4101
ANG. = ±3°		Kathelion		
UNITS : mm [inch]		PRODUCT SPEC.		DRAW NO. C326-4101
317-0011		—		
SCALE	SIZE	SHEET	REV.	09006/10018
NONE	A4	1 OF 1	B	