

REV.	DESCRIPTION	DATE
—	RELEASE	Aug. 06, 2002
1		
2		

$$A = (\text{NO. OF POSITION PER ROW}) \times 2.00 + 7.10$$

$$(\text{NO. OF POSITION PER ROW}) \times 0.079 + .280$$

$$B = (\text{NO. OF POSITION PER ROW}) \times 2.00 + 6.00$$

$$(\text{NO. OF POSITION PER ROW}) \times 0.079 + .236$$

$$C = (\text{NO. OF POSITION PER ROW} - 1) \times 2.00$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 0.079$$

### MATERIALS

- HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
- TERMINAL : S.Q. 0.50mm BRASS.

### SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 800V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
- OPERATING TEMPERATURE : -55°C TO +105°C.
- MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.

### ORDER INFORMATION :




26 - 43 01 - 2 \*\* - \* G

SERIES CODE — TYPE 01 — DUAL ROWS — NUMBER OF POSITION PER ROW —

GOLD PLATING ON SOLDER TAIL

CONTACT PLATING OPTIONS

- GOLD FLASH
- .000010" GOLD
- .000015" GOLD
- .000030" GOLD

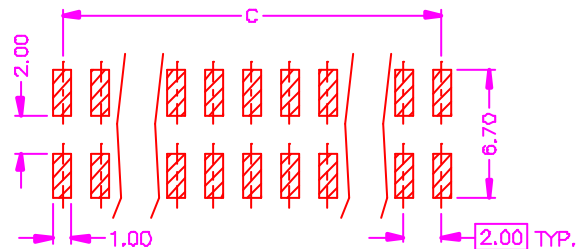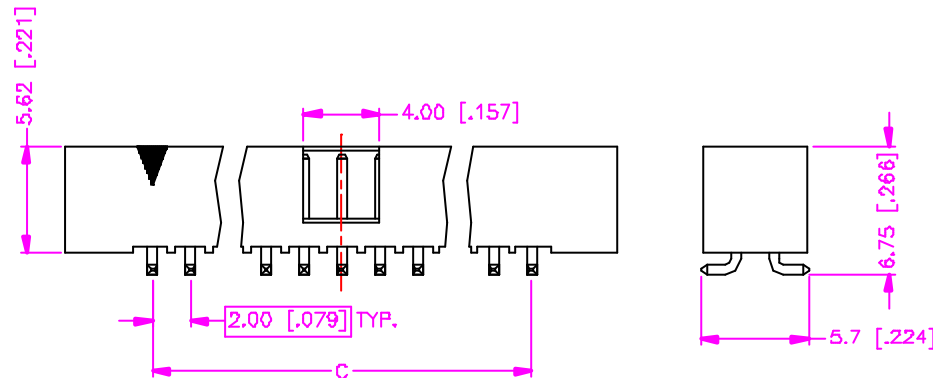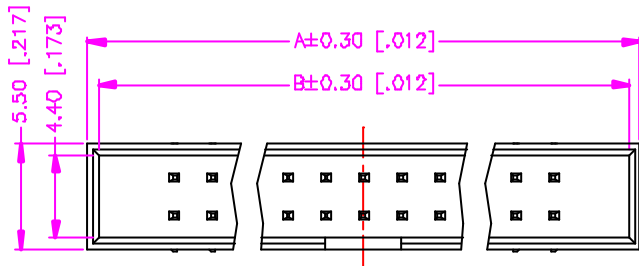

RECOMMEND P.C.B. LAYOUT  
TOP VIEW

TOLERANCE		DRAWER	<b>Astron</b>
.0±.0.30 [.012]		<i>ms</i>	
.00±.0.20 [.008]		CHECK	ASTRON TECHNOLOGY CORP.
.000±.XXX		<i>Katherine</i>	NAME
.0000±.		APP'D	SHROUDED HEADER
ANG.±3°		<i>ALBT</i>	2.00mm PITCH, P.C.B. MOUNT
		PRODUCT SPEC.	SMT TYPE
UNITS : mm [Inch]			DRAW NO.
			C326-4304
SCALE	SIZE	SHEET	REV.
NONE	A4	1 OF 1	A
		SHEET	10018