
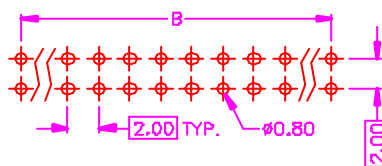
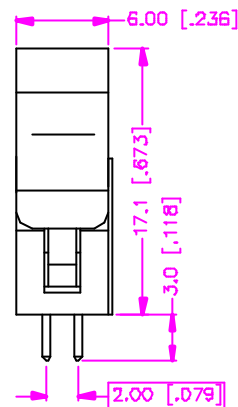
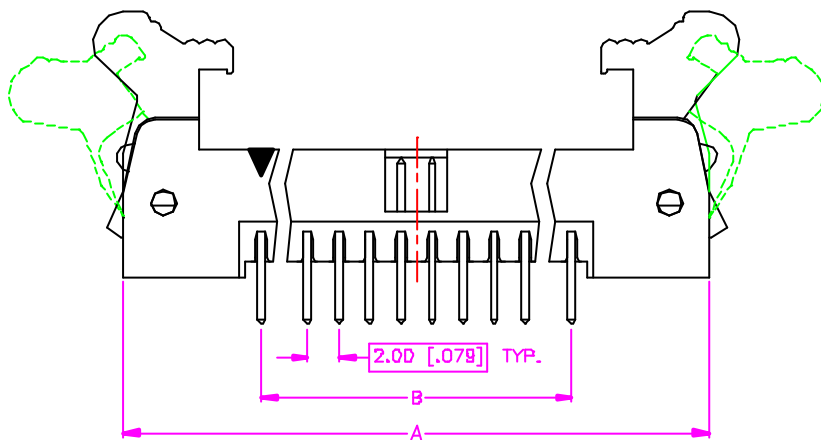


REV.	DESCRIPTION	DATE
—	RELEASE	Jan. 03, 2002
1	ADD PINS	Jun. 03, 2002
2		



RECOMMEND P.C.B. LAYOUT  
BOTTOM VIEW


### MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL : S.Q. 0.50mm COPPER ALLOY.

### SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. OPERATING TEMPERATURE : -40°C TO +85°C.

### ORDER INFORMATION :

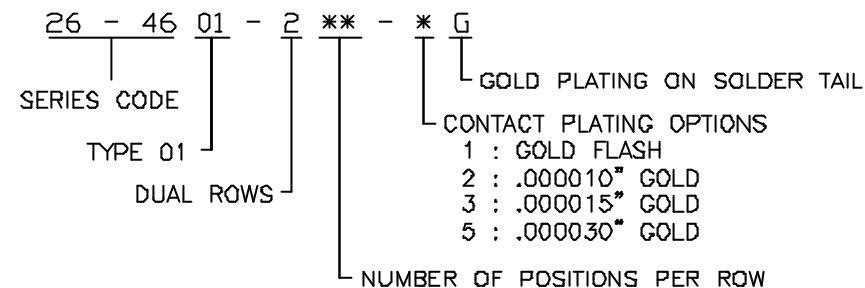

NUMBER OF POSITION	DIMENSIONS		NUMBER OF POSITION	DIMENSIONS	
	A	B		A	B
10	25.70[1.012]	8.00[.315]	30	45.70[1.799]	28.00[1.102]
12	27.70[1.091]	10.00[.394]	32	47.70[1.878]	30.00[1.181]
14	29.70[1.169]	12.00[.472]	34	49.70[1.957]	32.00[1.260]
16	31.70[1.248]	14.00[.551]	40	55.70[2.193]	38.00[1.496]
20	35.70[1.406]	18.00[.709]	44	59.70[2.350]	42.00[1.654]
22	37.70[1.484]	20.00[.787]	50	65.70[2.587]	48.00[1.890]
24	39.70[1.563]	22.00[.866]	68	83.70[3.295]	66.00[2.598]
26	41.70[1.642]	24.00[.945]	—	—	—

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>SUB</i> CHECK <i>Katharina</i> APP'D <i>ALBT</i>	<p>ASTRON TECHNOLOGY CORP.</p> <p>NAME SHROUDED HEADER 2.00mm PITCH, P.C.B. MOUNT VERTICAL, EJECTOR TYPE</p>
UNITS : mm [inch]	PRODUCT SPEC. —	
SCALE NONE	SIZE A4	DRAW NO. C326-4602
SHEET 1 OF 1	REV. B	10018