


REV.	DESCRIPTION	DATE
—	RELEASE	Jan. 07, 2002
1		
2		

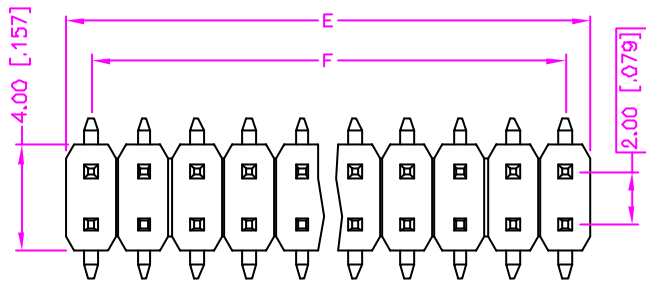

$$E = (\text{NO. OF POSITION PER ROW}) \times 2.00 \pm 0.40$$

$$(\text{NO. OF POSITION PER ROW}) \times 0.079 \pm 0.016$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 2.00$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 0.079$$





MATERIALS

- HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
- TERMINAL : S.Q. 0.50mm BRASS.

SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 800V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
- OPERATING TEMPERATURE : -55°C TO +105°C.
- MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.

ORDER INFORMATION :

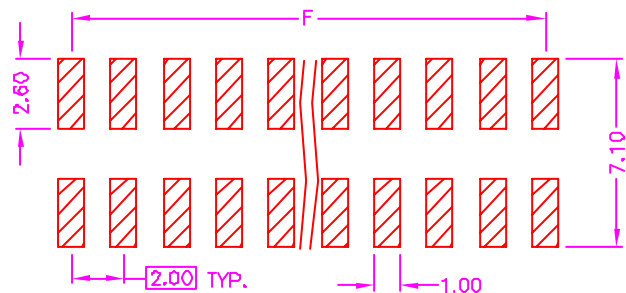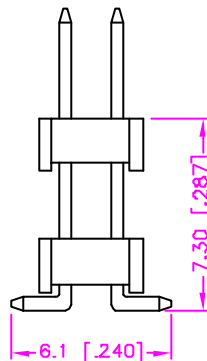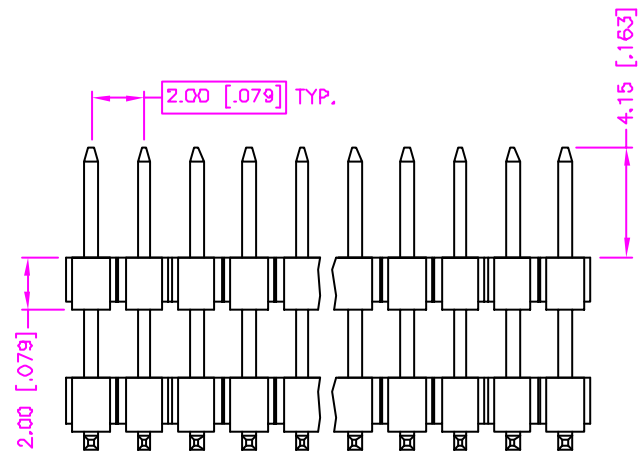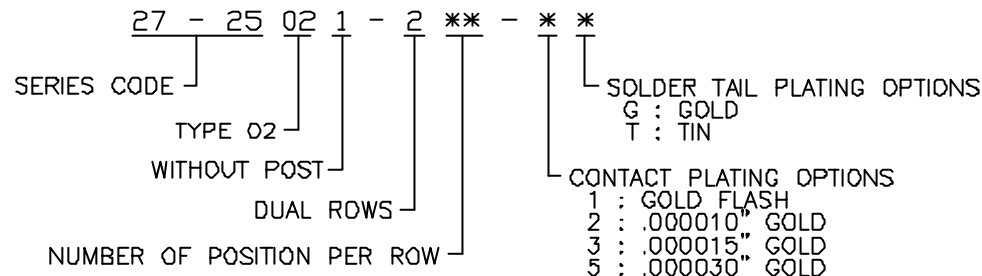

RECOMMEND P.C.B. LAYOUT
TOP VIEW

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>SUB</i>	 ASTRON TECHNOLOGY CORP.		
 UNITS : mm [inch]	CHECK <i>Katherine</i>		NAME POST HEADER 2.00mm PITCH, P.C.B. MOUNT SMT ELEVATE	
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	DRAW NO. C332-5002
				05005