

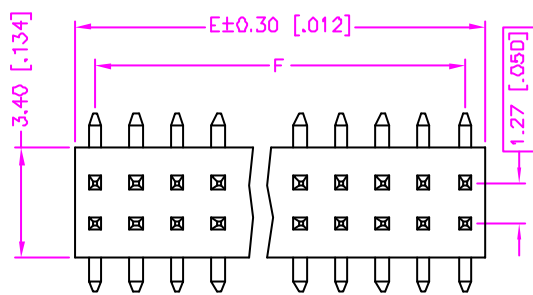
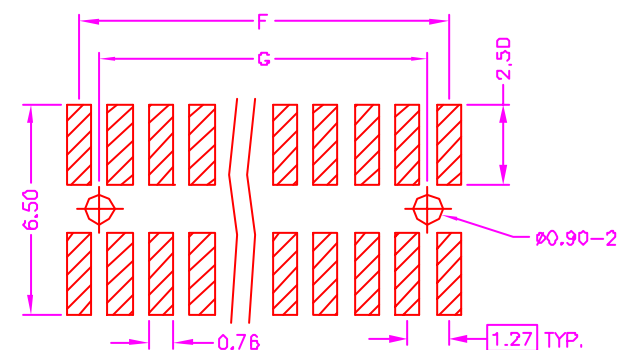


REV.	DESCRIPTION	DATE
—	RELEASE	Nov. 21, 2000
1	DRAW MODIFY	Aug. 07, 2003
2		

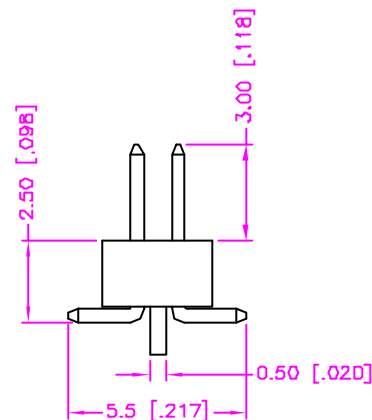

$E = (\text{NO. OF POSITION PER ROW}) \times 1.27$
 $(\text{NO. OF POSITION PER ROW}) \times 0.050$
 $F = (\text{NO. OF POSITION PER ROW} - 1) \times 1.27$
 $(\text{NO. OF POSITION PER ROW} - 1) \times 0.050$
 $G = (\text{NO. OF POSITION PER ROW} - 2) \times 1.27$
 $(\text{NO. OF POSITION PER ROW} - 2) \times 0.050$

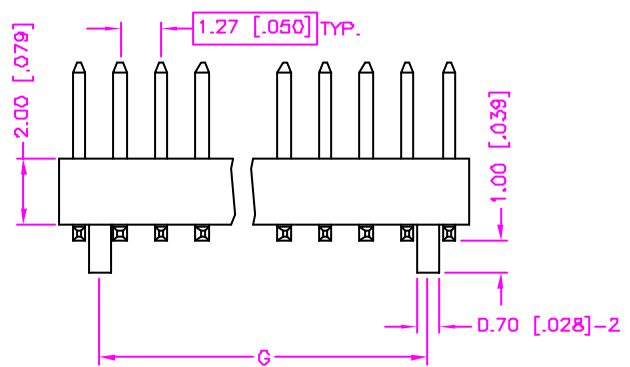

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS


- HOUSING : HI.TEMP. PLASTIC (UL 94V-0), BLACK.
- TERMINAL : S.Q. 0.40mm COPPER ALLOY.

SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 600V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
- OPERATING TEMPERATURE : -55°C TO +105°C.
- MAX. PROCESSING TEMPERATURE : 230°C FOR 30 ~ 60 SECONDS.

ORDER INFORMATION :

27 - 44 03 2 - 2 ** - * *
 SERIES CODE | TYPE 03 | WITH POST | DUAL ROWS | NUMBER OF POSITION PER ROW | SOLDER TAIL PLATING OPTIONS (G: GOLD, T: TIN) | CONTACT PLATING OPTIONS (1: GOLD FLASH, 2: .000010" GOLD, 3: .000015" GOLD, 5: .000030" GOLD)

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>PUB</i> CHECK <i>Katherlin</i> APP'D <i>LFON</i>	Astron ASTRON TECHNOLOGY CORP. POST HEADER 1.27x1.27mm PITCH, P.C.B. MOUNT SMT TYPE
 UNITS : mm [inch]	PRODUCT SPEC. —	
SCALE NONE	SIZE A4	DRAW NO. C333-4001
SHEET 1 OF 1	REV. B	13001