
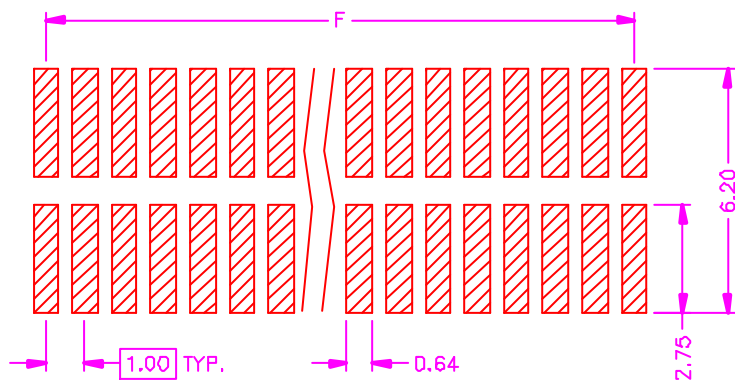
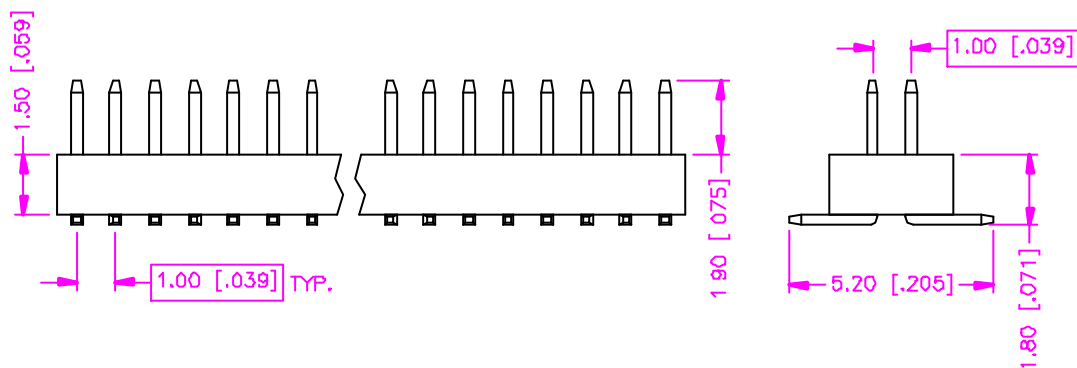


REV.	DESCRIPTION	DATE
—	RELEASE	Oct. 15, 2001
1		
2		

$$E = (\text{NO. OF POSITION PER ROW}) \times 1.00$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 1.00$$

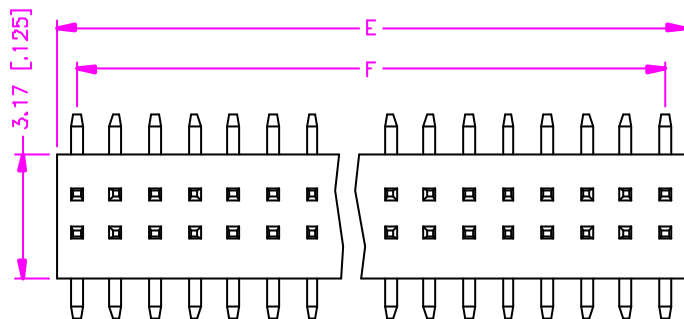

**RECOMMEND P.C.B. LAYOUT
TOP VIEW**

MATERIALS

- HOUSING : HI-TEMP. PLASTIC (UL 94V-0), BLACK.
- TERMINAL : S.Q. 0.30mm COPPER ALLOY.

SPECIFICATION

- CURRENT RATING : 1 AMP MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
- OPERATING TEMPERATURE : $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$.
- MAX PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.

ORDER INFORMATION

27 - 73 01 1 - 2 ** - * G

SERIES CODE GOLD PLATING ON SOLDER TAIL

TYPE 01 CONTACT PLATING OPTIONS

WITHOUT POST 1 : GOLD FLASH

DUAL ROWS 2 : 00010" GOLD

 3 : .000015" GOLD

 5 : .000030" GOLD

 NUMBER OF POSITION PER ROW

TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=±XXX .0000=± ANG.=±3°	DRAWER <i>SUE</i> CHECK <i>Katharina</i> APP'D <i>SEB</i>	ASTRON TECHNOLOGY CORP. NAME POST HEADER 1.00mm P.C.B. MOUNT SMT TYPE
UNITS : mm [inch]	PRODUCT SPEC —	
SCALE NONE	SIZE A4	DRAW NO. C339-3001
SHEET 1 OF 1	REV A	13001