


REV.	DESCRIPTION	DATE
—	RELEASE	Feb. 8, 2001
1	DRAW MODIFY	Sep. 08, 2003
2		

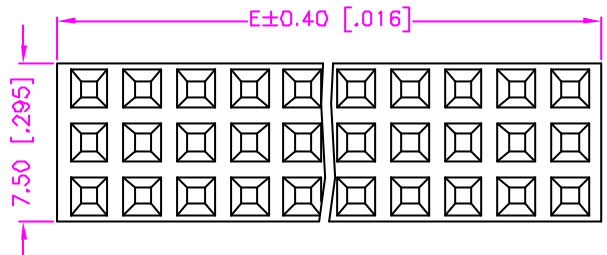

$$E = (\text{NO. OF POSITION PER ROW}) \times 2.54 + 0.50$$

$$(\text{NO. OF POSITION PER ROW}) \times 1.00 + .020$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 2.54$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 1.00$$





MATERIALS

1. HOUSING : POLYESTER (UL 94V-0), BLACK.
2. TERMINAL : COPPER ALLOY. (t=0.40mm)

SPECIFICATION

1. CURRENT RATING : 3 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 1000V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.

ORDER INFORMATION :

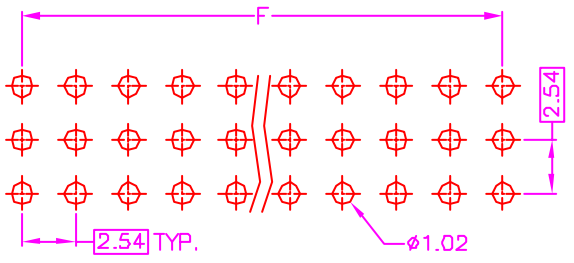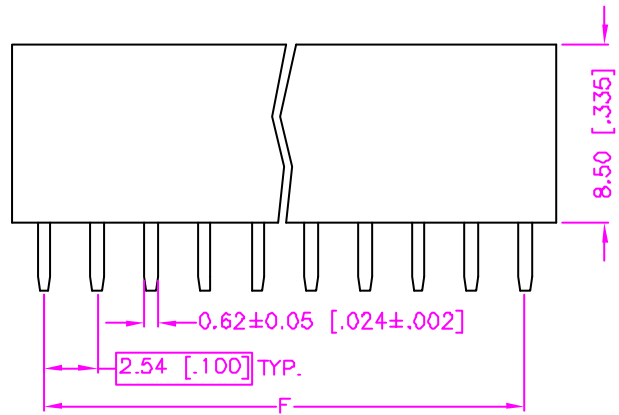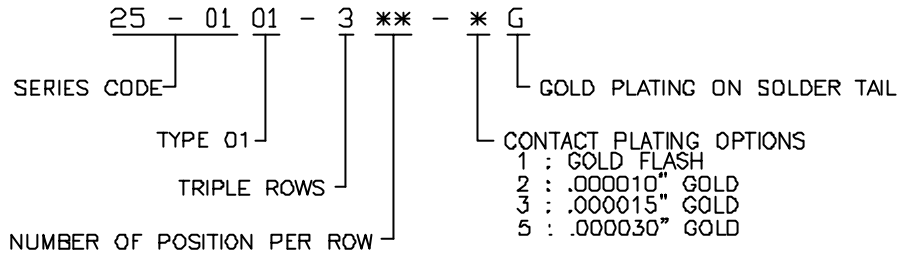

RECOMMEND P.C.B. LAYOUT
TOP VIEW

TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>SUS</i>	Astron ASTRON TECHNOLOGY CORP.
	CHECK <i>Katherine</i>	
UNITS : mm [inch]	APP'D <i>LEON</i>	NAME POST HEADER RECEPTACLE 2.54mm PITCH, P.C.B. MOUNT VERTICAL
	SCALE NONE	PRODUCT SPEC. —
SIZE A4	315-0003	DRAW NO. C341-1005
SHEET 1 OF 1	REV. B	14003