

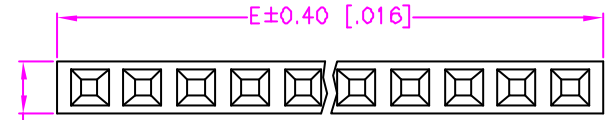


REV.	DESCRIPTION	DATE
—	RELEASE	Jan. 03, 2002
1	DRAW MODIFY	Jun. 19, 2003
2	DRAW MODIFY	Aug. 13, 2003

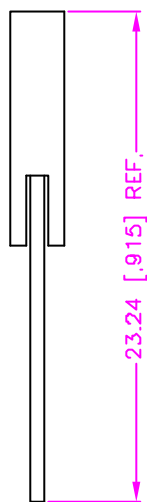

$$E = (\text{NO. OF POSITION PER ROW}) \times 2.54 + 0.50$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 2.54$$

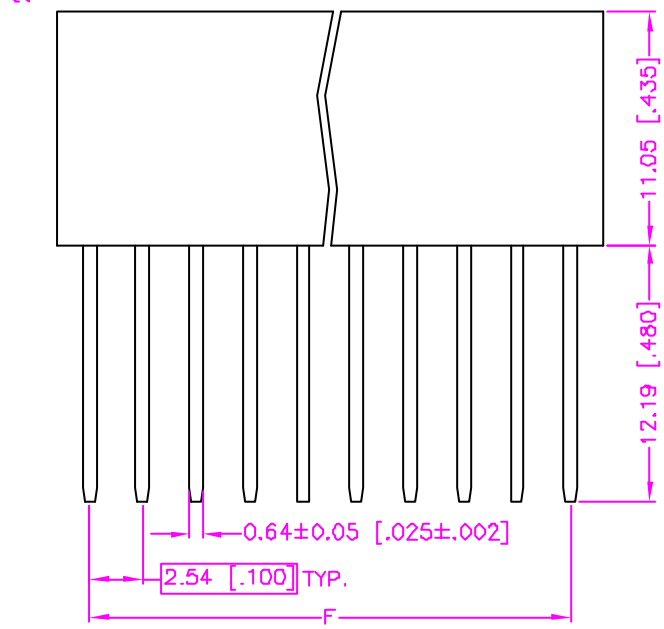


**MATERIALS**

- HOUSING : POLYESTER (UL 94V-0), BLACK.
- TERMINAL : COPPER ALLOY. (t=0.64mm)


**SPECIFICATION**

- CURRENT RATING : 3 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 5000M OHMS MIN. AT 1000V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -55°C TO +105°C.

**ORDER INFORMATION :**

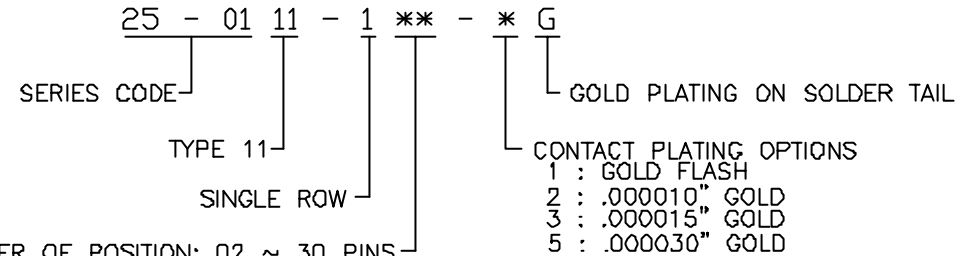

NUMBER OF POSITION: 02 ~ 30 PINS  
 (20, 32 PIN SEE DRAW NO.: R1150XXX-X04)

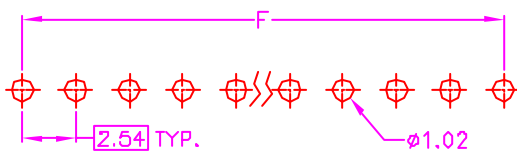

RECOMMEND P.C.B. LAYOUT  
 TOP VIEW

TOLERANCE .0=±.30 [.012] .00=±.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>Katherine</i> CHECK <i>PLB</i> APP'D <i>LEON</i>	<b>Astron</b> ASTRON TECHNOLOGY CORP. NAME POST HEADER RECEPTACLE 2.54mm PITCH, P.C.B. MOUNT VERTICAL
 UNITS : mm [inch]	PRODUCT SPEC. —	
SCALE NONE	SIZE A4	DRAW NO. C341-1012
SHEET 1 OF 1	REV. C	10018