


REV.	DESCRIPTION	DATE
—	RELEASE	Dec. 29, 2000
1	DRAW MODIFY	Oct. 16, 2002
2		

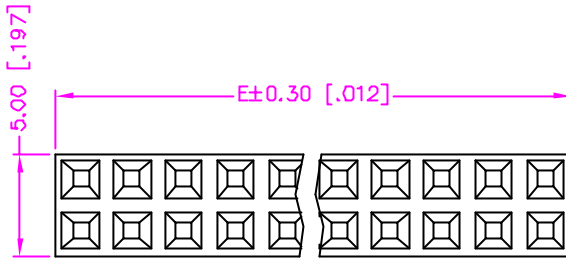

$$E = (\text{NO. OF POSITION PER ROW}) \times 2.54 + 0.66$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 2.54$$

MATERIALS

1. HOUSING : P.B.T. (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE. (t=0.64mm)

SPECIFICATION



1. CURRENT RATING : 3 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 1000V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.

ORDER INFORMATION :

25 - 02 ** - 2 ** - * G

SERIES CODE | TYPE OPTIONS, SEE TABLE | DUAL ROWS | NUMBER OF POSITION PER ROW | GOLD PLATING ON SOLDER TAIL | CONTACT PLATING OPTIONS

CONTACT PLATING OPTIONS:
 1 : GOLD FLASH
 2 : .00010" GOLD
 3 : .000015" GOLD
 5 : .000030" GOLD

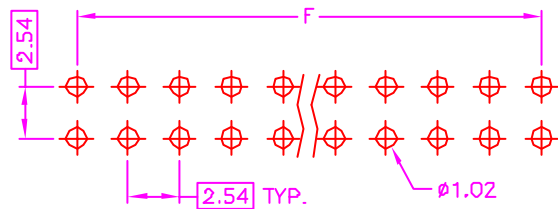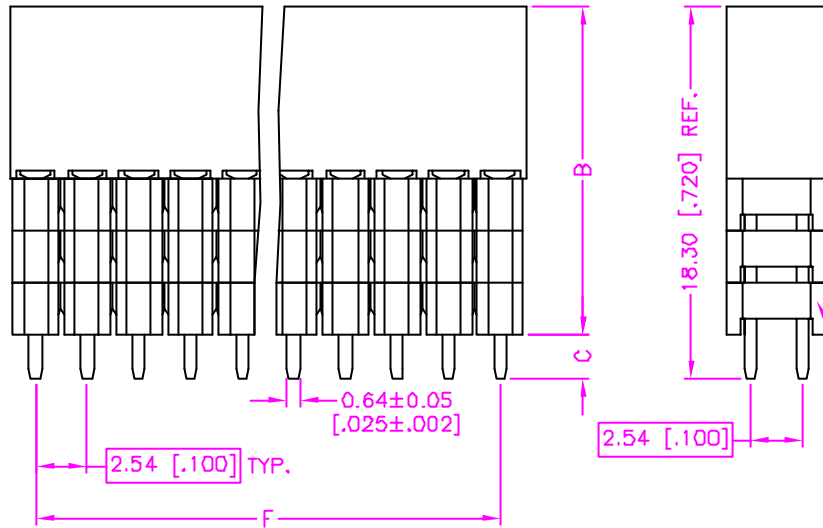

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

TYPE	NO. OF LAYER	B	C
11	1 LAYER	11.05 [.435]	7.25 [.285]
10	2 LAYER	13.59 [.535]	4.71 [.185]
13	3 LAYER	16.13 [.635]	2.17 [.085]

TOLERANCE .0=±.0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°	DRAWER <i>MUB</i>	Astron ASTRON TECHNOLOGY CORP.
CHECK <i>Katherine</i>	APP'D <i>ALBT</i>	
UNITS : mm [inch]	PRODUCT SPEC. —	NAME POST HEADER RECEPTACLE 2.54mm PITCH, P.C.B. MOUNT VERTICAL, ELEVATED TYPE
SCALE NONE	SIZE A4	DRAW NO. C341-2001
SHEET 1 OF 1	REV. B	(A)