




REV.	DESCRIPTION	DATE
—	RELEASE	May 08, 2002
1	DRAW MODIFY	Nov. 11, 2002
2		

$$E = (\text{NO. OF POSITION PER ROW}) \times 2.54 + 0.66$$

$$(\text{NO. OF POSITION PER ROW}) \times 1.00 + .026$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 2.54$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 1.00$$

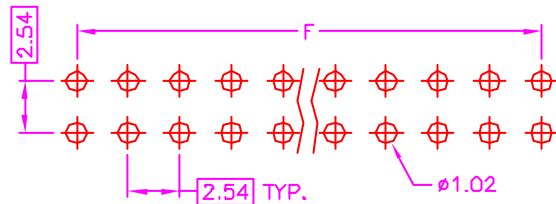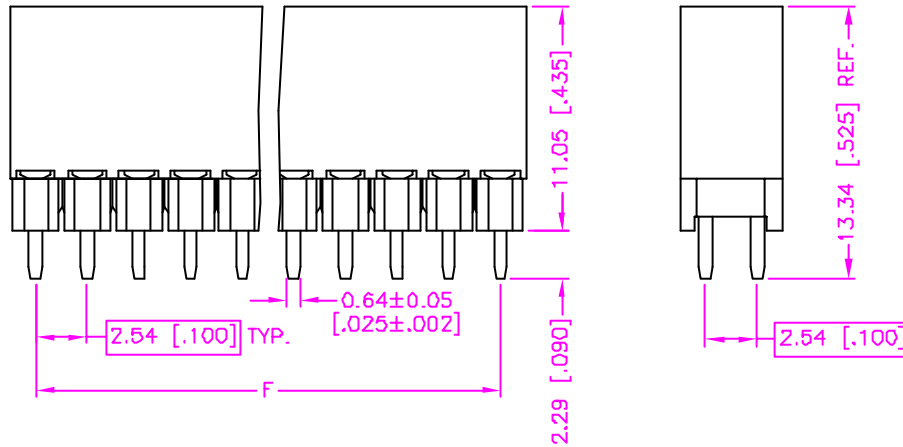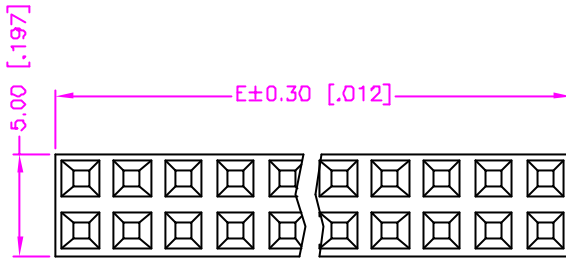

RECOMMEND P.C.B. LAYOUT  
TOP VIEW

### MATERIALS

1. HOUSING : POLYESTER (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE. (t=0.64mm)

### SPECIFICATION

1. CURRENT RATING : 3 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 1000V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.

### ORDER INFORMATION :

25 - 02 01 - 2 \*\* - \* G

SERIES CODE | TYPE 01 | DUAL ROWS | NUMBER OF POSITION PER ROW | CONTACT PLATING OPTIONS

GOLD PLATING ON SOLDER TAIL

CONTACT PLATING OPTIONS  
 1 : GOLD FLASH  
 2 : .000010" GOLD  
 3 : .000015" GOLD  
 4 : .000020" GOLD  
 5 : .000030" GOLD

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°		DRAWER <i>Katherine</i>	 ASTRON TECHNOLOGY CORP. NAME POST HEADER RECEPTACLE 2.54mm PITCH, P.C.B. MOUNT VERTICAL, ELEVATED TYPE
 UNITS : mm [inch]		CHECK <i>NLS</i>	
SCALE NONE		APP'D <i>ALB</i>	DRAW NO. C341-2005
SIZE A4		PRODUCT SPEC. —	REV. B
SHEET 1 DF 1		(A)/13001	