


REV.	DESCRIPTION	DATE
—	RELEASE	Oct. 19, 2000
1	LENGTH MODIFY	Nov. 30, 2000
2	MATERIALS MODIFY	Jun. 1, 2001
3	DRAW MODIFY	Oct. 01, 2002

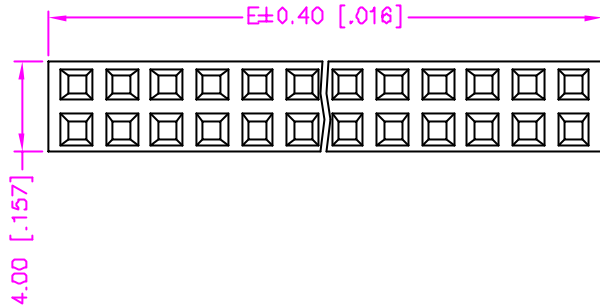

$$E = (\text{NO. OF POSITION PER ROW}) \times 2.00 + 0.50$$

$$(\text{NO. OF POSITION PER ROW}) \times 0.079 + 0.020$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 2.00$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 0.079$$





MATERIALS

1. HOUSING : TERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE. (t=0.20mm)

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 800V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.

ORDER INFORMATION :

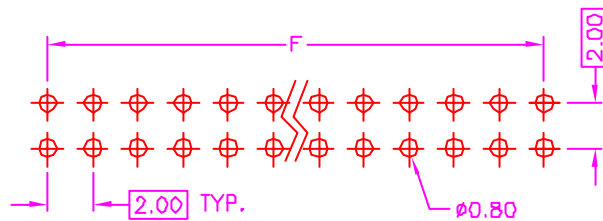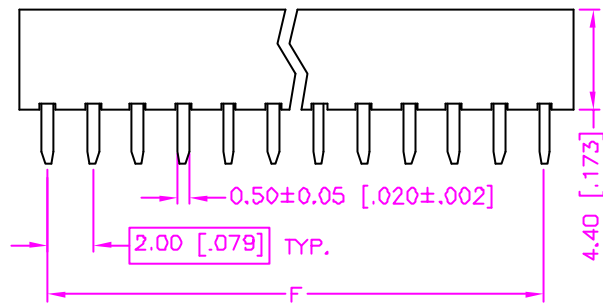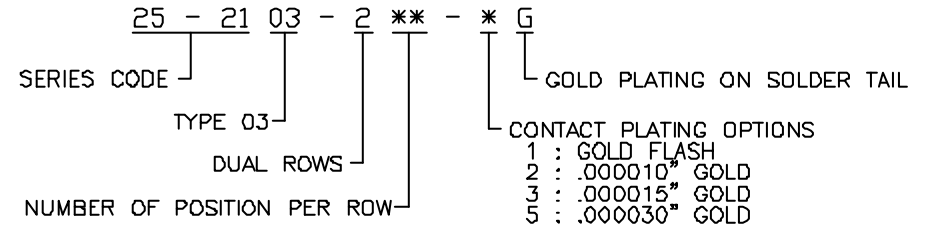

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

TOLERANCE		DRAWER	 ASTRON TECHNOLOGY CORP.
.0=±0.30 [.012]		CHECK	
.00=±0.20 [.008]		APP'D	
.000=±.XXX		PRODUCT SPEC.	
.0000=±.		315-0029	NAME
ANG.=±3°		UNITS : mm [inch]	POST HEADER RECEPTACLE
		SCALE	2.00mm PITCH, P.C.B. MOUNT
NONE		SIZE	VERTICAL
A4		SHEET	DRAW NO.
1 DF 1		REV.	C342-1003
D		14003/1001B	