


REV.	DESCRIPTION	DATE
A	RELEASE	Jul. 20, 2001
B	DRAW MODIFY	Jan. 14, 2004
C		


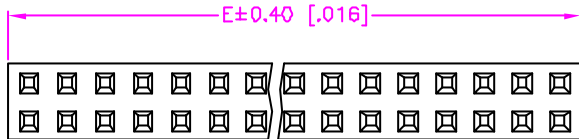


$$E = (\text{NO. OF POSITION PER ROW}) \times 2.00 + 0.20$$

$$(\text{NO. OF POSITION PER ROW}) \times 0.079 + 0.008$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 2.00$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 0.079$$

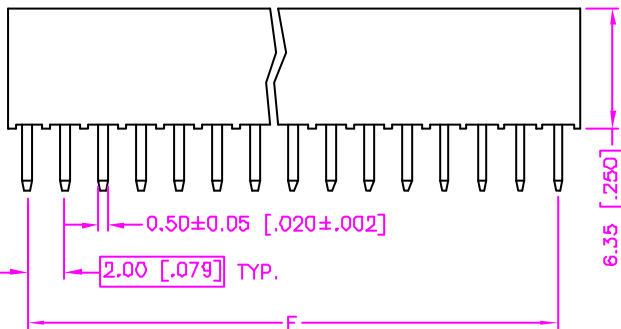



MATERIALS

1. HOUSING : POLYAMIDE (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE. (t=0.50mm)

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 800V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.

ORDER INFORMATION :

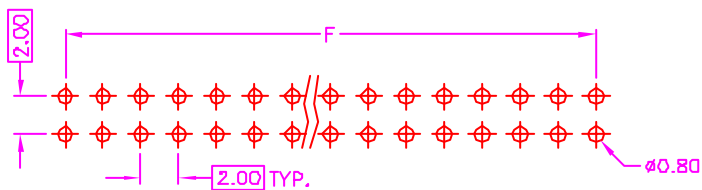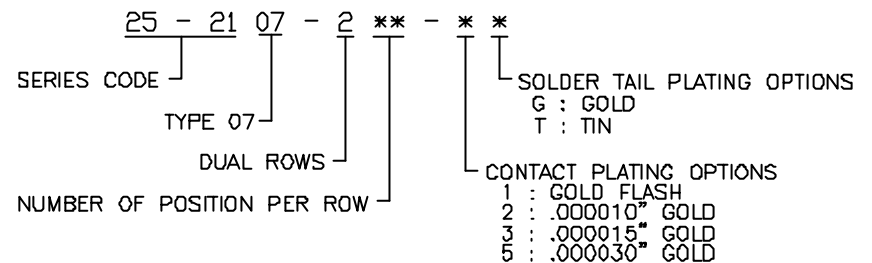

RECOMMEND P.C.B. LAYOUT
TOP VIEW

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°		DRAWER <i>SUB</i>	 ASTRON TECHNOLOGY CORP.
UNITS : mm [inch]		CHECK <i>Katherine</i>	
SCALE NONE	SIZE A4	APP'D <i>LFOV</i>	NAME POST HEADER RECEPTACLE 2.00mm PITCH, P.C.B. MOUNT VERTICAL
SHEET 1 OF 1	REV. B	PRODUCT SPEC. —	DRAW NO. C342-1007
			(A)