
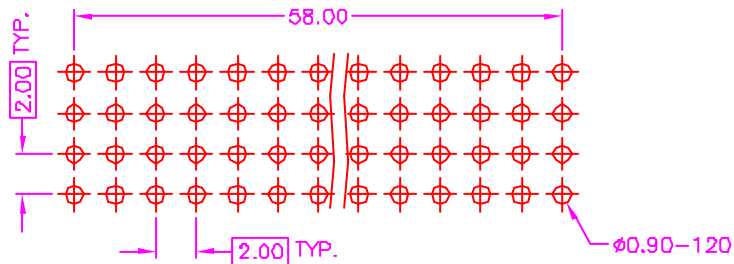
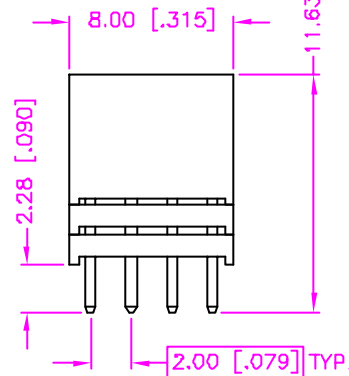
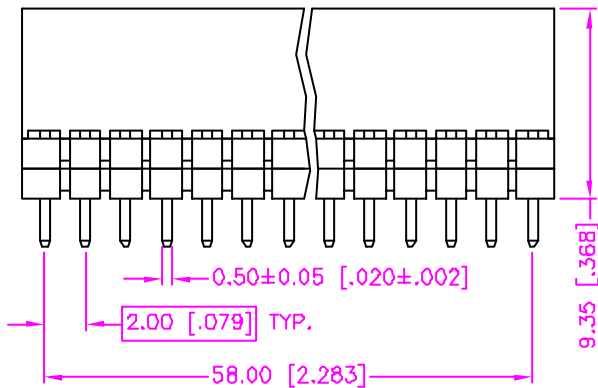


REV.	DESCRIPTION	DATE
—	RELEASE	Apr. 23, 2002
1	DRAW MODIFY	Nov. 18, 2003
2		

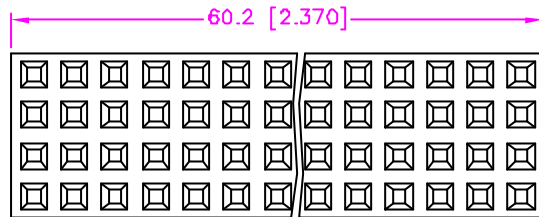

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

1. HOUSING : PLOYAMIDE (UL 94V-0).
2. TERMINAL : PHOSPHOR BRONZE. (t=0.50mm)

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 800V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.

ORDER INFORMATION :

25 - 22 01 - 4 30 * - * G

SERIES CODE | TYPE 01 | QUAD ROWS | NUMBER OF POSITION PER ROW | HOUSING COLOR OPTIONS
 BLANK : BLACK
 W : WHITE

* GOLD PLATING ON SOLDER TAIL
 * CONTACT PLATING OPTIONS
 1 : GOLD FLASH
 2 : .000010" GOLD
 3 : .000015" GOLD
 5 : .000030" GOLD

TOLERANCE .0=±0.30 [.012] .00=±0.20 [.008] .000=±.xxx .0000=±. ANG.=±3°	DRAWER <i>Katharlin</i> CHECK <i>PUS</i> APP'D <i>LION</i>	Astron ASTRON TECHNOLOGY CORP. NAME POST HEADER RECEPTACLE 2.00mm PITCH, P.C.B. MOUNT VERTICAL, ELEVATED TYPE
	PRODUCT SPEC. —	
UNITS : mm [inch]	315-0007	DRAW NO. C342-2003
SCALE NONE	SIZE A4	SHEET 1 OF 1
	REV. B	(A)