





REV.	DESCRIPTION	DATE
—	RELEASE	Jul. 16, 2001
1		
2		

$$E = (\text{NO. OF POSITION PER ROW}) \times 2.00 + 0.20 \pm 0.40$$

$$(\text{NO. OF POSITION PER ROW}) \times 0.079 + 0.008 \pm 0.016$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 2.00$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 0.079$$

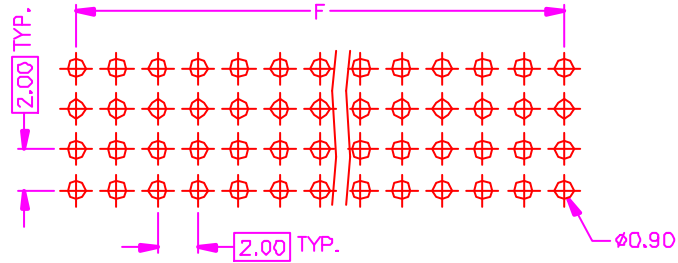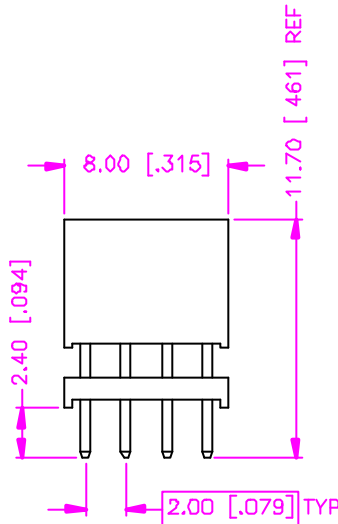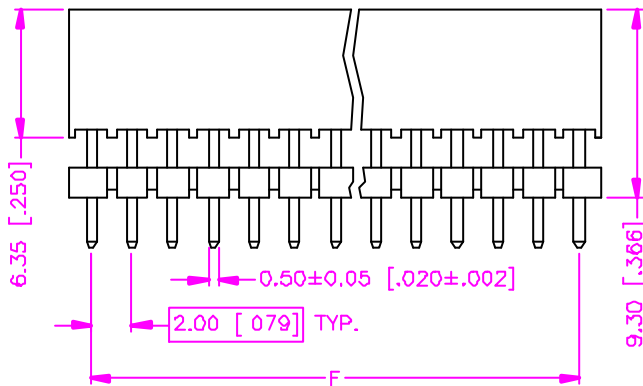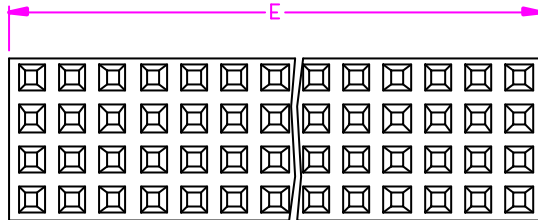

RECOMMEND P.C.B. LAYOUT  
BOTTOM VIEW


### MATERIALS

- HOUSING : PLOYAMIDE (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE. (t=0.50mm)

### SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 800V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 5000M OHMS MIN. AT 50V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -55°C TO +105°C.

### ORDER INFORMATION :

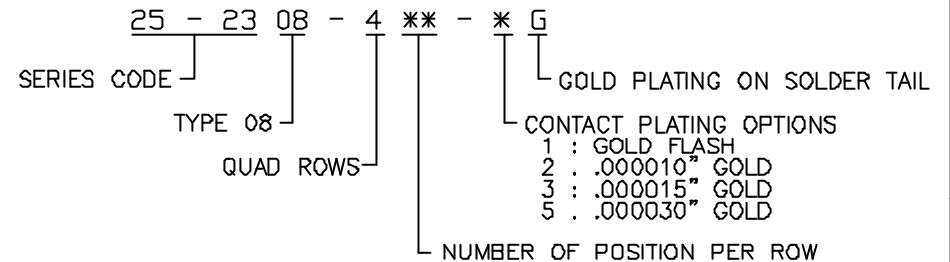

TOLERANCE .0±0.30 [.012] .00±0.20 [.008] .000±.XXX .0000±. ANG.±3°		DRAWER <i>Katherine</i>	 ASTRON TECHNOLOGY CORP.
UNITS : mm [inch]		CHECK <i>SUB</i>	
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. <i>GREEN</i>
DRAW NO. C342-3005		DRAW NO. C342-3005	
		(A)	