





REV.	DESCRIPTION	DATE
—	RELEASE	Jul. 16, 2001
1		
2		

$$E = (\text{NO. OF POSITION PER ROW}) \times 2.00 + 0.20 \pm 0.40$$

$$(\text{NO. OF POSITION PER ROW}) \times 0.079 + 0.008 \pm 0.016$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 2.00$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 0.079$$

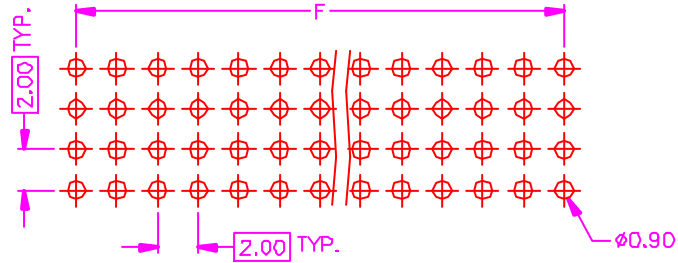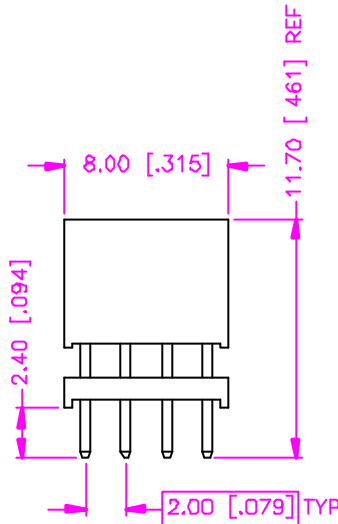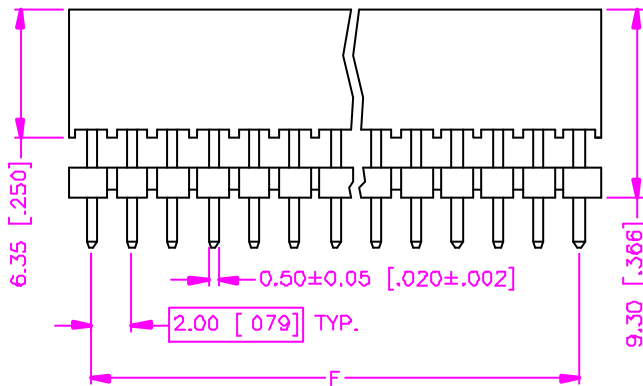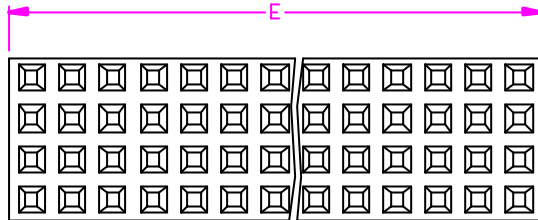

RECOMMEND P.C.B. LAYOUT  
BOTTOM VIEW


### MATERIALS

- HOUSING : PLOYAMIDE (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE. (t=0.50mm)

### SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 800V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -55°C TO +105°C.

### ORDER INFORMATION :

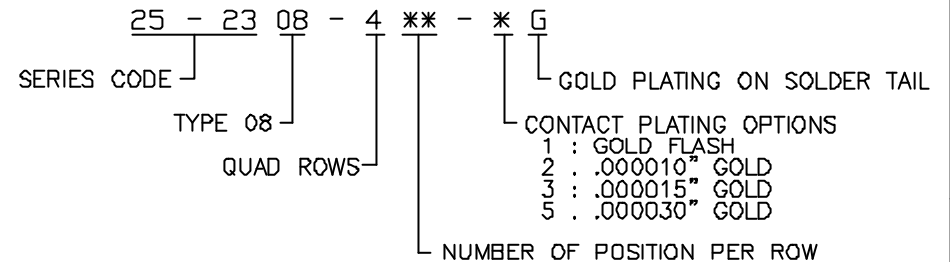

TOLERANCE		DRAWER <i>Katherine</i>		<b>Astron</b>
.0±.030 [.012]		CHECK <i>Sub</i>		
.00±.020 [.008]		APP'D <i>ALB</i>		NAME
.000±.XXX		PRODUCT SPEC. —		2.00mm PITCH, P.C.B. MOUNT
.0000±.		UNITS : mm [inch]		VERTICAL, ELEVATED TYPE
ANG.±3°		SCALE NONE SIZE A4		DRAW NO. C342-3005
		SHEET 1 OF 1		REV. <i>Green</i>
		REV. <i>Green</i>		(A)