


REV.	DESCRIPTION	DATE
—	RELEASE	JUL. 18, 2001
1		
2		


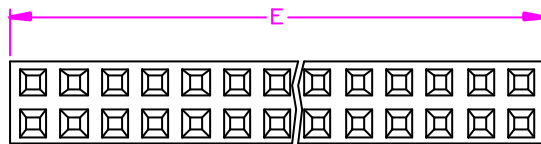


$$E = (\text{NO. OF POSITION PER ROW}) \times 2.00 + 0.20 \pm 0.40$$

$$(\text{NO. OF POSITION PER ROW}) \times 0.079 + 0.08 \pm 0.16$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 2.00$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 0.079$$

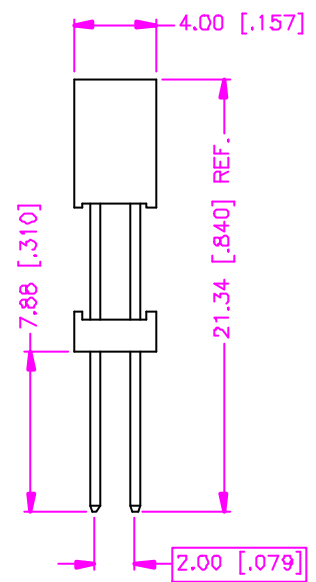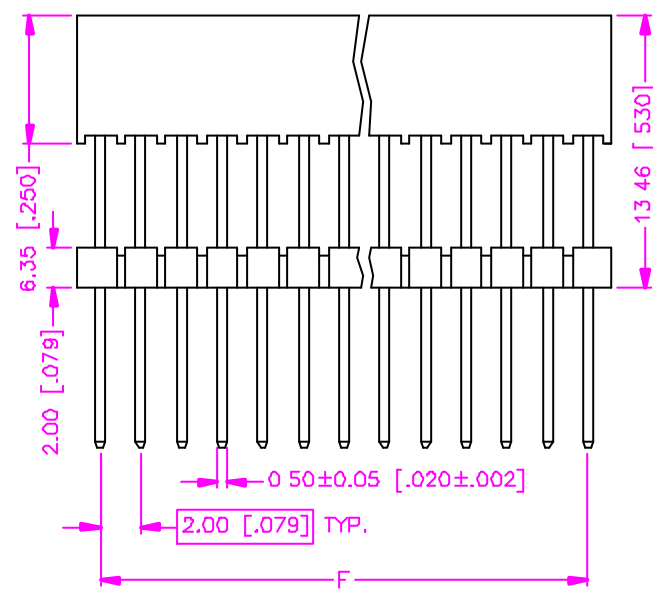



MATERIALS

1. HOUSING : PLOYAMIDE (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE. (t=0.50mm)

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 800V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE . 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.

ORDER INFORMATION :

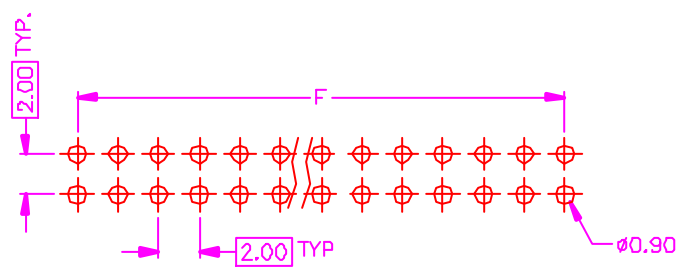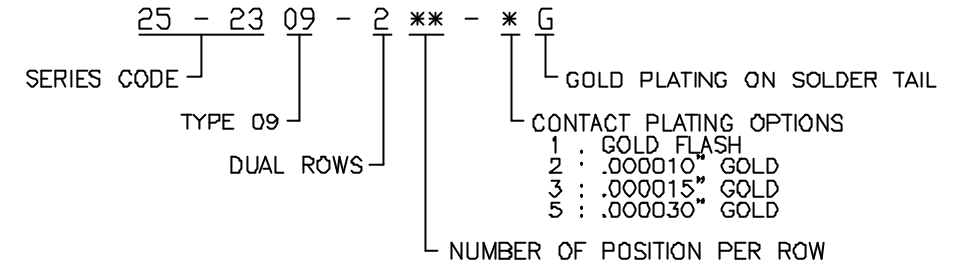

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

TOLERANCE		DRAWER	
.0=±0.30 [.012]		SUB	
.00=±0.20 [.008]		CHECK	
.000=±.XXX		Katherlin	
.0000=±		APP'D	
ANG.=±3°		ALB	
UNITS : mm [inch]		PRODUCT SPEC.	
SCALE NONE		SHEET 1 OF 1	
SIZE A4		REV. (A)	

		ASTRON TECHNOLOGY CORP.	
		NAME	
		POST HEADER RECEPTACLE 2.00mm PITCH, P.C.B. MOUNT VERTICAL, ELEVATED TYPE	
DRAW NO.		C342-3006	