


REV.	DESCRIPTION	DATE
—	RELEASE	Jul. 31. 2001
1		
2		

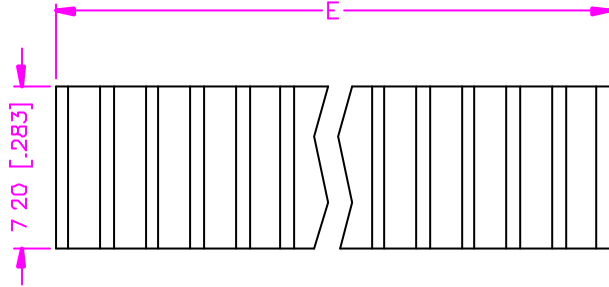

$$E = (\text{NO. OF POSITION PER ROW}) \times 2.00 + 0.50 \pm 0.30$$

$$(\text{NO. OF POSITION PER ROW}) \times 0.79 + 0.20 \pm 0.12$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 2.00$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 0.79$$

MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE. (t=0.20mm)

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 800V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.

ORDER INFORMATION :




25 - 24 02 - 2 ** - * G

SERIES CODE — TYPE 02 — DUAL ROWS — NUMBER OF POSITION PER ROW —

GOLD PLATING ON SOLDER TAIL

CONTACT PLATING OPTIONS

- 1 : GOLD FLASH
- 2 : .000010" GOLD
- 3 : .000015" GOLD
- 5 : .000030" GOLD

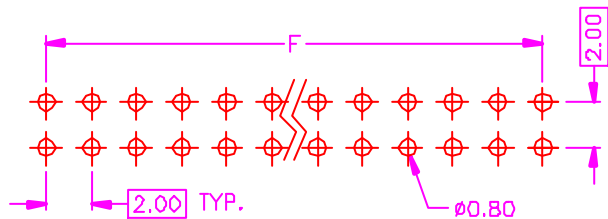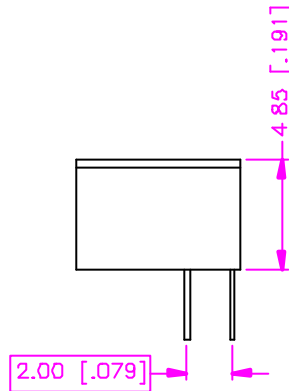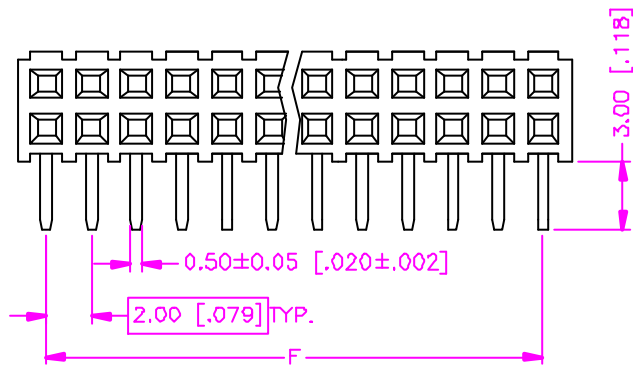

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

TOLERANCE	DRAWER	Astron	
.0±.0.30 [.012]	<i>SUB</i>		
.00±.0.20 [.008]	CHECK	ASTRON TECHNOLOGY CORP.	
.000±.XXX	<i>Kalherdim</i>	NAME	
.0000±.	APP'D	POST HEADER RECEPTACLE	
ANG.±3°	<i>AS&T</i>	2.00mm PITCH, P.C.B. MOUNT	
	PRODUCT SPEC.	RIGHT ANGLE TYPE	
	UNITS : mm [inch]	315-0043	DRAW NO.
SCALE NONE	SIZE A4	10018	C342-4001
SHEET 1 DF 1	REV. <i>GREEN</i>		