


REV.	DESCRIPTION	DATE
—	RELEASE	Aug. 2, 2001
1		
2		

$$E = (\text{NO. OF POSITION PER ROW}) \times 2.00 + 0.20 \pm 0.30$$

$$(\text{NO. OF POSITION PER ROW}) \times 0.079 + 0.008 \pm 0.012$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 2.00$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 0.079$$

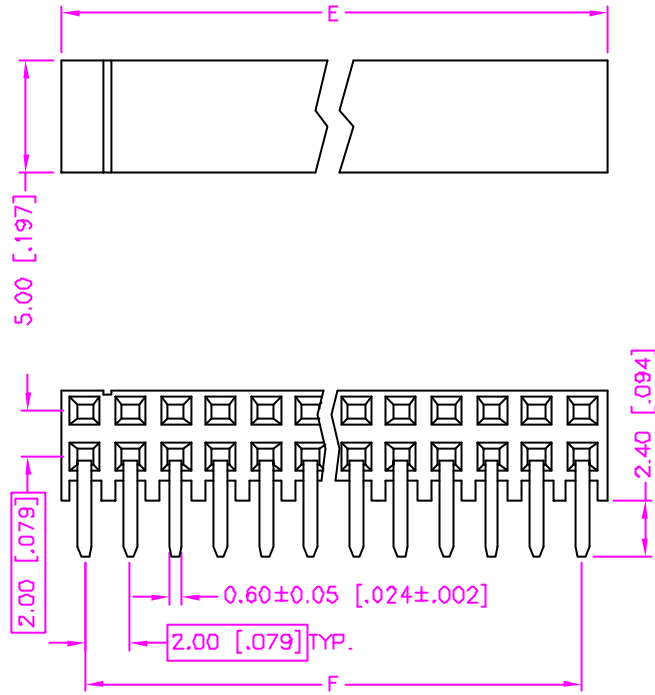



MATERIALS

- HOUSING : POLYAMIDE (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE. (t=0.15mm)

SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 800V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 5000M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -55°C TO +105°C.

ORDER INFORMATION :

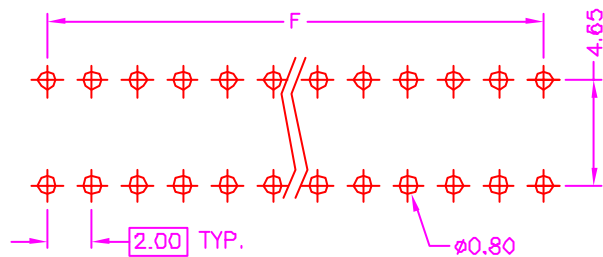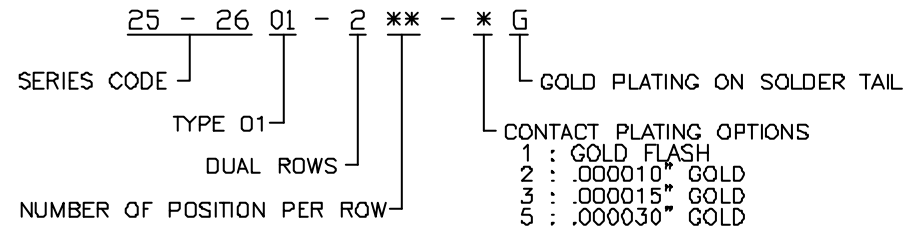

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

TOLERANCE .0=±.030 [.012] .00=±0.20 [.008] .000=±.XXX .0000=±. ANG.=±3°		DRAWER <i>PUG</i>	 ASTRON TECHNOLOGY CORP.
UNITS : mm [inch]		CHECK <i>Katherine</i>	
SCALE NONE	SIZE A4	APP'D <i>ALLET</i>	DRAW NO. C342-6001
SHEET 1 DF 1	REV. A	PRODUCT SPEC. 315-0053	13001/'10018